
PRODUCT CATALOGUE

PMA® Flexible cable protection systems

For applications with high requirements

PMA



PMA® cable protection products from ABB can be used in an extremely wide range of applications. The list is virtually endless, including rail vehicles and infrastructure, industrial machines, electrical systems on ships, solar and wind energy generation installations, telecommunications, construction and medical equipment. Wherever cables are installed and exposed to mechanical stresses and environmental hazards. Today and tomorrow we guarantee best quality regarding products, technical support, service and delivery.

Table of contents

004–007	Introduction
008–037	PMA® conduits
038–049	PMAFIX Pro Connectors
050–092	PMAFIX Connectors IP66 IP68 (IP69)
093–097	PMAFIXPlus Connectors IP68 (IP69)
098–101	Special connectors
102–111	Accessories
112–123	PMA TRUST™ & support systems
124–131	PMA® JUMBO sizes
132–137	PMA® Divisible System
138–145	PMA® Smart Line IP66
146–155	PMAJACK Plastic and metal braids
156–168	Technical annex
169–185	Index
185	Important information
186	Further information

Introduction

A swiss manufacturer with a global presence

There is no better reference than satisfied customers. PMA® cable protection provides customized specific solutions for customers worldwide.

ABB's PMA manufacturing site is located in Uster (Switzerland), close to Zurich. The majority of what we produce for the world market is made at this location. Also our research and development department is located here.

Thanks of our large network of professional partners in all of the major industrialised countries around the globe, we are able to guarantee best quality regarding products, technical support, service and fast delivery.

ABB is focused on providing solutions that address the critical issues in every area of operations, allowing customers to focus on plant sustainability, cost, quality, flexibility, safety and regulatory challenges.





Setting new standards and trends

Customer needs are a top priority at ABB, and we work every day to ensure all our customer requirements are met in our products. We offer cable protection solutions and services that are tailored to meet requirements in every type of application. Our range extends from basic items right up to the most demanding high-tech products. We can develop system solutions and special products that are designed to meet specific customer requirements. Our intensive research and development activities, which include the field of new materials, are a major reason why PMA products from ABB continue to set new standards and trends in the cable protection marketplace. These efforts together with excellent quality and service have helped us build up an outstanding reputation with leading corporations around the world.

From pioneer to market leader

ABB has been developing, producing, and selling top-quality PMA cable protection systems since 1975. Our high-quality Swiss products have rapidly earned us an excellent reputation worldwide and established us as the market leader. Our range of more than 6,500 products gives customers the protection they need in railway, mechanical engineering, and shipbuilding applications worldwide. PMA products are also the solution of choice in automation, building installations and other projects where power and data cables require dependable protection.

Unique benefits of PMA products from ABB

Service to the customer is what motivates us. In addition to series production, PMA can build fittings and conduits to meet individual requirements as a special service to our customers.

- A safe, reliable system that is easy to install
- Vibration-proof connections
- System connection strength
- Ingress protection conforming to recognized test methods
- High impact strength even at low temperatures
- High compression strength (peak load)
- Long-term reversed-bending resistance
- Good chemical resistance
- Fire protection (flammability and smoke generation)
- Good weather resistance
- Long wearing
- ...and much more

Introduction

Areas of applications



Mechanical engineering

A considerable number of PMA cable protection systems are used in mechanical engineering. A few examples illustrate how varied the range of mechanical engineering applications are; you will find our products in machine tools, packaging machines, printing machines, as well as heating, ventilation, conveyer, and filling systems. PMA products also make a vital contribution to the smooth operation of high voltage and emergency power systems, can production machinery and woodworking machines, etc. PMA cable protection solutions safeguard cables, wires and data links against heat, cold, tensile stress, pressure stress, and other external influences in the important mechanical engineering industry.

Rail vehicles/Rail infrastructure

PMA products from ABB have proven their dependability in railway construction projects around the world. This is the reason why large corporations including Siemens, Alstom, Bombardier, PESA, CSR/CNR, Deutsche Bahn, and SNCF have chosen us as supplier over a period of many years. Our special railway engineering product line provides protection and safety on signalling systems, couplings, trucks, and gangways, as well as roof, and underfloor equipment.

The range of applications is very extensive. PMA products contribute to the safe operation of trams, locomotives, freight cars, high-speed trains, and even roller coasters.

Worldwide recognitions

All PMA products are rigorously tried and tested to meet the demands of industry worldwide.





Automation/Robotics

In the field of automation, there is a need for products that can withstand the stress of motion-intensive applications. Solutions developed by ABB for the automation industry fully meet these requirements. Special conduit designs, supports and abrasion protection sleeves provide optimal protection along the entire length of all moving elements, enabling engineers to achieve a massive reduction in torsional forces. There is good reason why leading robotics manufacturers rely on ABB technology.















Countless applications

PMA cable protection products from ABB can be used in an extremely wide range of applications. The list is virtually endless and includes industries such as telecommunications, construction equipment and medical equipment. Wherever there is a need for cable protection, the PMA product portfolio provides safe, dependable, forward-looking solutions or will develop them specially for you to meet your individual needs.

PMA® conduits

Conduit guide

Products				PMAFLEX Pro			PMAFLEX					
Application areas				PHT	POH	PSX	CYL	ESD	PCL	PEL	PIS/PIH	POS
Machine building 	General applications	static				●		●				
		dynamic	●			●		●		●	●	
	Heavy loads	static										
		dynamic										
	Outdoor applications	static									●	
		dynamic									●	
	Antistatic requirements	static					●					
		dynamic					●					
Traction vehicles 	Outdoor applications with sunlight exposure	static								●		
		dynamic								●		
	Outdoor applications	static	●							●		
		dynamic	●							●		
	Indoor applications	static		●								
Rail infrastructure 	Outdoor applications with sunlight exposure	static										
	Indoor and tunnel applications	static		●								
Automation/ Robotics 	Moving systems	dynamic	●			●		●		●		
	Systems with extreme movements	dynamic								●		
	Moving systems with antistatic requirements	dynamic					●					
Ship + Off-shore 	Outdoor general applications	static								●		
		dynamic	●							●		
	Indoor applications	static				●		●				
		dynamic				●		●		●		
	Passenger area	static		●		●		●				
Energy 	Outdoor applications with sunlight exposure	static										
	Indoor applications	static		●		●		●		●		
	Exposed to radiation	static			●							
Food & Beverage 	General applications	static										
		dynamic										
Others     	Vehicle building	static	●									
	Telecommunications	indoor				●			●			
		outdoor										
	Building constructions	indoor		●								
		outdoor										
	Ex hazardous areas (ATEX, IECEx)	static						●				
	High temperature applications	static	●		●							

PMA® conduits

Conduit guide

Products		PMAFLEX Pro			PMAFLEX							
		PHT	POH	PSX	CYL	ESD	PCL	PEL	PIS/PIH	POS		
Material properties	Ductility											
	Reversed bending resistance											
	Compression resistance											
	Low temperature performance											
	High temperature performance											
	Resistance to weathering											
Approvals	Bi-National Recognition File UL1696 & CSA C22.2 No. 227.3-05 CSA C22.2 No. 227.3-05 Bi-National Listing File UL1660 & CSA C22.2 No. 227.2.1											
			Free from halogens, REACH + RoHS compliant	●	●	●	●	●	●	●		
			Non flame propagating EN61386			●	●	●	●	●		
	EN 45545-2 NFPA 130 (ASTM E162 – ASTM E662) BSS 7239/SMP 800-C ASTM E1354 PN-K 2511 GOST 12.1.044-89											
			DNV (Type approved)		●	●	●	●	●			
			Lloyd's Register (Type approved)		●	●	●	●	●			
			Bureau Veritas (Type approved)		●	●	●	●	●			
	Hazardous	ATEX IECEx										
				Food & Beverage	NSF Ecolab							
	Temperature range	Continuous operating temperature (acc. to DO 9.21-4510) Short term max. operating temperature 168h (acc. to DO 9.21-4360)	Min. (-) Max. (+)	-50			-25	-100	-40	-40	-50	-50
135				95	170	105	90	105	60	95	95	
Sizes			Nominal width min.	07	10	10	07	07	07	10	07	07
			Nominal width max.	48	48	48	125	95	125	48	125	95
			Metric size min.	10	12	12	10	10	10	12	10	10
			Metric size max.	50	50	50	146	106	146	50	146	106
Page no.			15	15	16	17	17	18	19	20	21	

PMA® conduits

Overview


Conduits to protect cables. We offer many different conduit types for diverse applications with various technical requirements.

The product groups:

- PMAFLEX Pro
- PMAFLEX
- PMAFLEX PLUS
- PMAFLEX Multilayer
- PMA Divisible System
- PMA Smart Line
- PMA overbraided
- PMA overextruded

Many conduits are specially approved, e.g. CSA, UL Recognition, DNV, Lloyds, Bureau Veritas etc. All conduits are REACH and RoHS compliant.

Conduit sizes range from 6mm to 125mm Ø, from lightweight to heavyweight, and from pliable to highly flexible. PMA also offers slit and divisible conduits. Standard colours are black and grey.

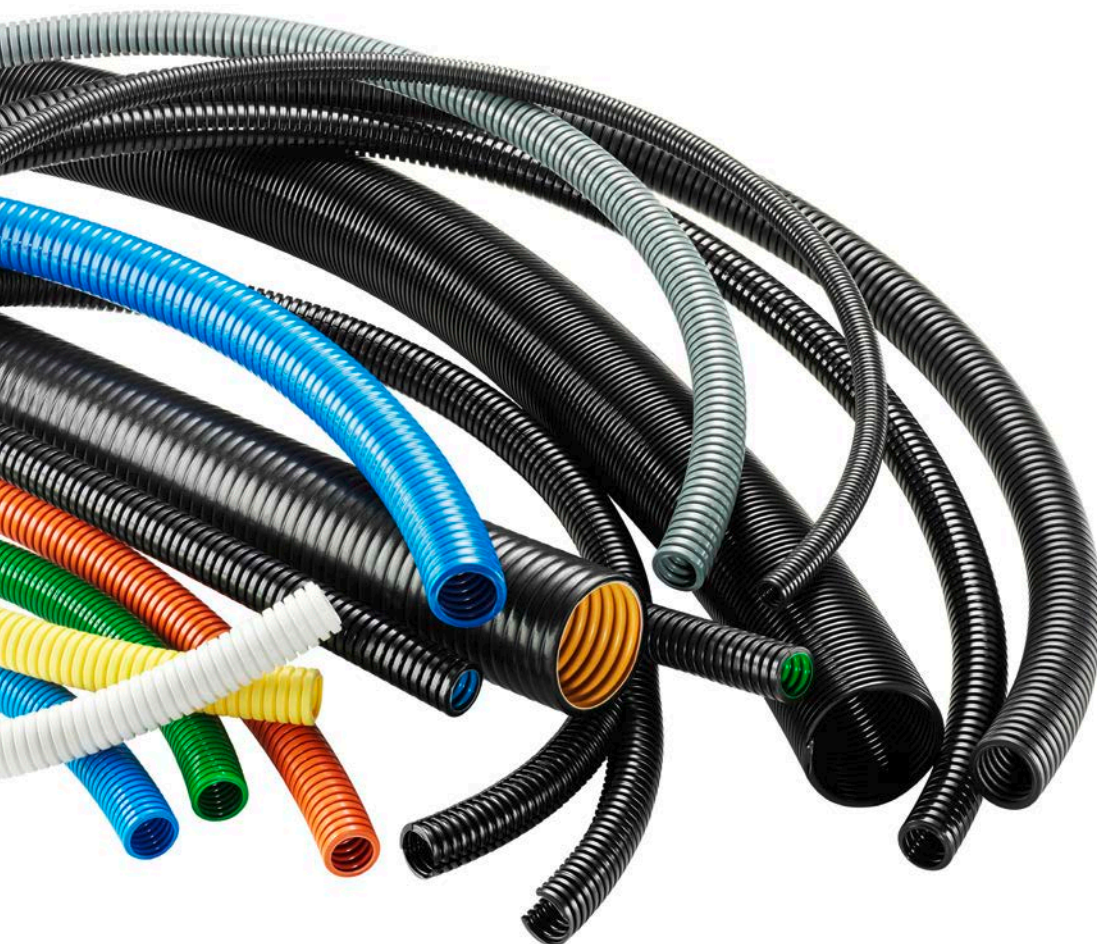

PMA® CONDUITS


PMA offers a large range of very different mono- and multilayer conduit types which fulfill high technical demands to protect humans and cables.




PMA conduits

Part number codes

For part number explanation only, not to be used as a configuration tool.

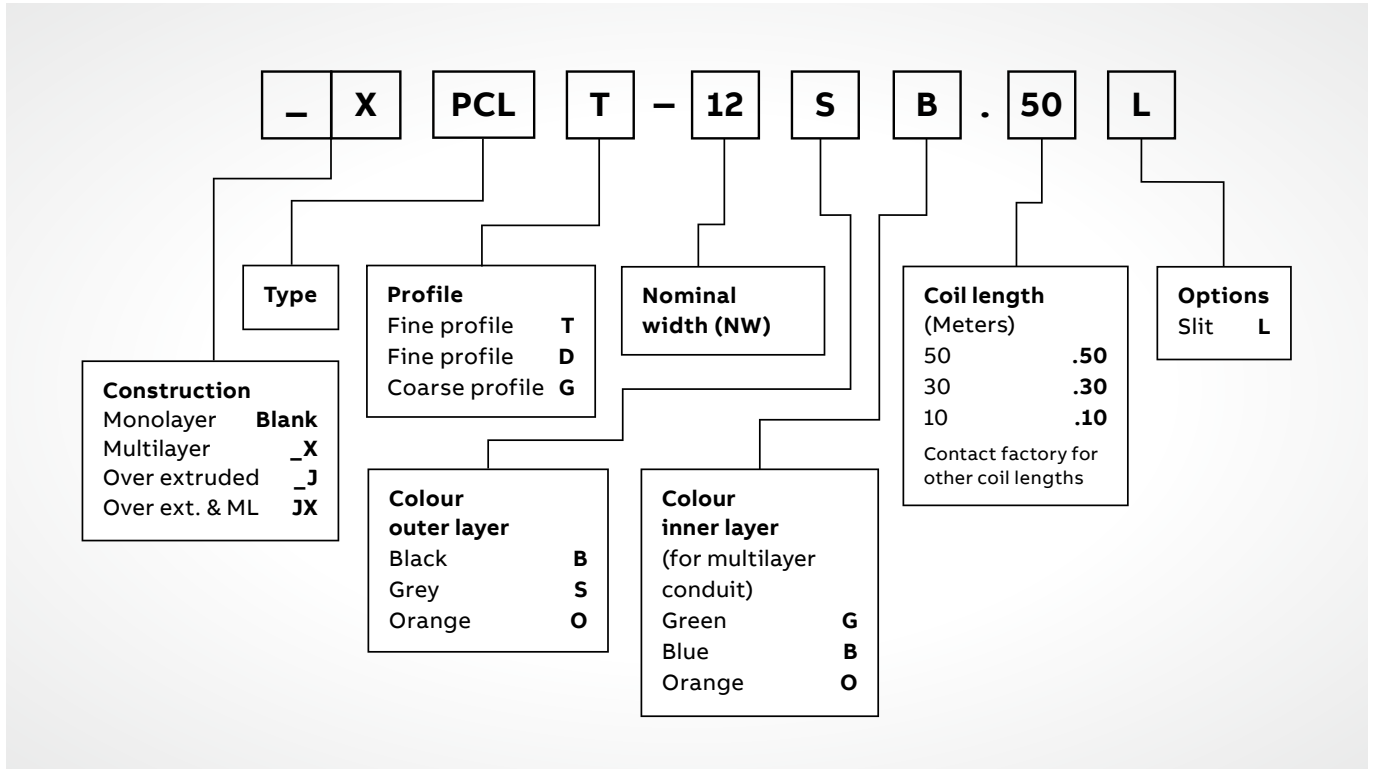


Radius

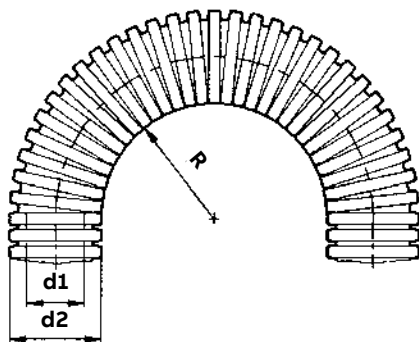

Stat. radius = Lowest recommended bending radius for static (fixed) installation.

Dyn. radius = Lowest recommended bending radius for dynamic (flexible) installation.

Profile




Fine profile T
Tight bending radius.

Coarse profile G
High pull-out strength.

PMAFLEX Pro

Type PHT & POH conduit

Type PHT - Highly flexible, medium/heavy-duty

	Order no. (black)	Conduit size		Inside Ø (mm)	Outside Ø (mm)	Stat./Dyn. radius (mm)	PU (m)
		NW	Metric				
	PHTT-07B	07	10	6.7	10.0	15/40	50
	PHTT-10B	10	12	9.7	12.8	20/50	50
	PHTT-12B	12	16	12.1	15.6	25/65	50
	PHTT-17B	17	20	16.8	21.1	35/85	50
	PHTT-23B	23	25	23.3	28.4	45/110	50
	PHTG-17B	17	20	15.6	21.1	40/85	50
	PHTG-23B	23	25	22.0	28.4	50/110	50
	PHTG-29B	29	32	27.9	34.5	60/135	50
	PHTG-36B	36	40	36.2	42.4	75/170	30
	PHTG-48B	48	50	47.3	54.5	90/220	30


PHT Index

min.	max.
Ductility	
Fatigue reversed bending	
Compression resistance (PHTT-17B)	
Compression resistance (PHTG-17B)	
Low temperature performance	
Weathering resistance	

For applications at high and very low temperatures / dynamic applications
 Specially formulated polyamide elastomer. Both excellent flexibility and high compression strength
 Enhanced temperature range compared to standard polyamides
 High resistance to ultra violet rays and weathering

Materials	Temperature range	Colour
Specially formulated polyamide elastomer	-50°C to +135°C	Black
Certification	Short-term to: +180°C	UV Resistance
Free from halogens, REACH compliant and RoHS compliant	Impact resistance	High
	Extremely good at low temperatures	

Type POH - Very flexible, medium-duty

	Order no. (black)	Order no. (grey)	Conduit size		Inside Ø (mm)	Outside Ø (mm)	Stat. radius (mm)	PU (m)
			NW	Metric				
	POHT-10B	POHT-10S	10	12	10.0	12.8	20	50
	POHT-12B	POHT-12S	12	16	12.3	15.6	25	50
	POHG-17B	POHG-17S	17	20	16.0	21.1	40	50
	POHG-23B	POHG-23S	23	25	22.1	28.4	50	50
	POHG-29B	POHG-29S	29	32	28.0	34.5	60	50
	POHG-36B	POHG-36S	36	40	36.4	42.4	75	30
	POHG-48B	POHG-48S	48	50	47.0	54.5	90	30

POH Index

min.	max.
Ductility	
Fatigue reversed bending	
Compression resistance	
Low temperature performance	
Weathering resistance	


For highest fire and passenger safety requirements
 Excellent fire safety characteristics acc. to BS 6853 1a (interior)
 Good ductility and reversed bending characteristics

Materials	Temperature range	Colour
Specially modified polypropylene	-25°C to +95°C	Black/Grey
Certification	Short-term to: +120°C	UV Resistance
Free from halogens, REACH compliant and RoHS compliant	Fire performance	-
	acc. to BS 6853 1a (interior)	

PMAFLEX Pro

Type PSX conduit

Type PSX - Flexible, light-duty

	Order no. (black)	Conduit size		Inside Ø (mm)	Outside Ø (mm)	Stat. radius (mm)	PU (m)
		NW	Metric				
	PSXT-10B	10	12	9.8	12.8	20	50
	PSXT-12B	12	16	12.2	15.6	25	50
	PSXT-17B	17	20	16.9	21.1	35	50
	PSXG-23B	23	25	21.9	28.4	45	50
	PSXG-29B	29	32	27.9	34.5	55	50
	PSXG-36B	36	40	36.2	42.4	65	30
	PSXG-48B	48	50	47.0	54.5	85	30

For applications with highest fire safety performance requirements / with extreme temperature conditions / exposed to radiation.
 Chemical resistance: To oils, fats, acids, alcohols and hot water (good resistance to hydrolysis)
 Excellent high and low temperature properties
 High radiation resistance
 Very good ductility

PSX Index


min.	max.
Ductility	████████████████████
Fatigue reversed bending	████████████████████
Compression resistance	████████████████████
Low temperature performance	████████████████████
Weathering resistance	████████████████████

Materials	Temperature range	Colour
Specially modified polyetherimide	-100°C to +170°C	Black
Certification	Short-term to: +200°C	
Free from halogens, REACH compliant and RoHS compliant	Fire performance	UV Resistance
	Low smoke density and toxicity	-

PMAFLEX

Type CYL & ESD conduit

Type CYL - Very flexible, medium-duty conduit

	Order no. (black)	Order no. (grey)	Conduit size		Inside Ø (mm)	Outside Ø (mm)	Stat. radius (mm)	PU (m)
			NW	Metric				
	CYLT-07B	CYLT-07S	07	10	6.6	10.0	15	50
	CYLT-10B	CYLT-10S	10	12	9.8	12.8	20	50
	CYLT-12B	CYLT-12S	12	16	12.1	15.6	25	50
	CYLT-17B	CYLT-17S	17	20	16.8	21.1	35	50
	CYLT-23B	CYLT-23S	23	25	23.2	28.4	45	50
	CYLT-29B	CYLT-29S	29	32	28.8	34.5	55	50
	CYLT-36B	CYLT-36S	36	40	36.7	42.4	65	30
	CYLT-48B	CYLT-48S	48	50	48.2	54.5	80	30
	CYLG-23B	CYLG-23S	23	25	21.9	28.4	50	50
	CYLG-29B	CYLG-29S	29	32	27.8	34.5	60	50
	CYLG-36B	CYLG-36S	36	40	36.1	42.4	75	30
	CYLG-48B	CYLG-48S	48	50	46.9	54.5	90	30
	CYLG-56B	CYLG-56S	56	68	56.7	67.5	120	30
	CYLG-70B	CYLG-70S	70	80	67.5	79.6	140	10
	CYLG-95B	CYLG-95S	95	106	91.6	107.0	190	10
	CYLG-125B	CYLG-125S	125	146	125.5	146.0	260	06

Approvals




CYL Index

min.	max.
Ductility	
Fatigue reversed bending	
Compression resistance	
Low temperature performance	
Weathering resistance	

For machine building and installation industries / static and slightly dynamic applications
 Very good ductility and good reversed bending characteristics
 Good mechanical characteristics even under extreme conditions, such as low temperatures and low humidity

Materials	Temperature range	Colour
Specially formulated polyamide 6	-40°C to +105°C	Black/Grey
Certification	Short-term to: +160°C	
Free from halogens, REACH compliant and RoHS compliant	Self extinguishing	UV Resistance
	acc. to UL 94 V2	-

Type ESD - Very flexible, medium-duty conduit

	Order no. (black)	Conduit size		Inside Ø (mm)	Outside Ø (mm)	Stat./Dyn. radius (mm)	PU (m)
		NW	Metric				
	ESDT-07B	07	10	6.7	10.0	15/40	50
	ESDT-10B	10	12	9.7	12.8	20/50	50
	ESDT-12B	12	16	12.0	15.6	25/65	50
	ESDT-17B	17	20	16.6	21.1	35/85	50
	ESDT-23B	23	25	23.0	28.4	40/110	50
	ESDT-29B	29	32	28.7	34.5	50/135	50
	ESDT-36B	36	40	36.8	42.4	60/170	30
	ESDT-48B	48	50	48.0	54.5	75/220	30
	ESDG-56B	56	68	55.8	67.5	110/270	30
	ESDG-70B	70	80	67.4	79.6	130/320	10
	ESDG-95B	95	106	91.5	107.0	170/430	10

ESD Index

min.	max.
Ductility	
Fatigue reversed bending	
Compression resistance	
Low temperature performance	
Weathering resistance	


For dynamic applications in robotics and automation where electrostatic charge and uncontrolled discharge need to be avoided
 Prevents electrostatic charging. For indoor and outdoor use (very good cold temperature performance)

Materials	Temperature range	Colour
Specially modified polyamide 12	-40°C to +90°C	Black
Certification	Short-term to: +150°C	
Free from halogens, REACH compliant and RoHS compliant	Fatigue resistance	UV Resistance
	Excellent fatigue resistance	Excellent

PMAFLEX

Type PCL conduit

Type PCL - Very flexible, medium-duty

	Order no. (black)	Order no. (grey)	Conduit size		Inside Ø (mm)	Outside Ø (mm)	Stat. radius (mm)	PU (m)
			NW	Metric				
	PCLT-07B	PCLT-07S	07	10	6.6	10.0	15	50
	PCLT-10B	PCLT-10S	10	12	9.8	12.8	20	50
	PCLT-12B	PCLT-12S	12	16	12.1	15.6	25	50
	PCLT-17B	PCLT-17S	17	20	16.8	21.1	35	50
	PCLT-23B	PCLT-23S	23	25	23.2	28.4	45	50
	PCLT-29B	PCLT-29S	29	32	28.8	34.5	55	50
	PCLT-36B	PCLT-36S	36	40	36.7	42.4	65	30
	PCLT-48B	PCLT-48S	48	50	48.2	54.5	80	30
	PCLG-17B	PCLG-17S	17	20	15.8	21.1	40	50
	PCLG-23B	PCLG-23S	23	25	21.9	28.4	50	50
	PCLG-29B	PCLG-29S	29	32	27.8	34.5	60	50
	PCLG-36B	PCLG-36S	36	40	36.1	42.4	75	30
	PCLG-48B	PCLG-48S	48	50	46.9	54.5	90	30
	PCLG-56B	PCLG-56S	56	68	56.7	67.5	120	30
	PCLG-70B	PCLG-70S	70	80	67.5	79.6	140	10
PCLG-95B	PCLG-95S	95	106	91.6	107.0	190	10	
PCLG-125B	PCLG-125S	125	146	125.5	146.0	260	6	

Approvals



PCL Index

min.	max.
Ductility	
Fatigue reversed bending	
Compression resistance	
Low temperature performance	
Weathering resistance	


For machine building, installation and vehicle building industries / static and slightly dynamic applications
 Very good ductility and good reversed bending characteristics. Very good long-term properties
 Very good mechanical characteristics even under extreme conditions, such as low temperatures and low humidity

Materials	Temperature range	Colour
Specially formulated polyamide 6	-50°C to +105°C	Black/Grey
Certification	Short-term to: +160°C	
Free from halogens, REACH compliant and RoHS compliant	Self extinguishing	UV Resistance
	acc. to UL 94 V2	-

PMAFLEX

Type PEL conduit

Type PEL - Highly flexible, light-duty, soft

	Order no. (grey)	Order no. (grey, slit)	Conduit size		Inside Ø (mm)	Outside Ø (mm)	Stat. radius (mm)	PU (m)
			NW	Metric				
	PELT-10S	PELT-10SL	10	12	9.8	12.8	20	50
	PELT-12S	PELT-12SL	12	16	12.2	15.6	25	50
	PELT-17S	PELT-17SL	17	20	16.8	21.1	30	50
	PELT-23S	PELT-23SL	23	25	23.2	28.4	40	50
	PELT-29S	PELT-29SL	29	32	28.9	34.5	45	30
	PELT-36S	PELT-36SL	36	40	37.0	42.4	55	30
	PELT-48S	PELT-48SL	48	50	48.2	54.5	70	30

For electrical cabinets and appliance construction

Very good ductility

Suitable for small bending radii

Good resistance against strong acids and bases

PEL Index


min.	max.
Ductility	
Fatigue reversed bending	
Compression resistance	
Low temperature performance	
Weathering resistance	

Materials	Temperature range	Colour
Specially modified polyethylene	-50°C to +60°C	Grey
Certification		UV Resistance
Free from halogens, REACH compliant and RoHS compliant		-

PMAFLEX

Type PIS/PIH conduit

Type PIS/PIH - Highly flexible, medium- and heavy-duty

	Order no. (black)	Order no. (grey)	Conduit size		Inside Ø (mm)	Outside Ø (mm)	Stat./dyn. radius (mm)	PU (m)
			NW	Metric				
	PIST-07B	PIST-07S	07	10	6.7	10.0	15/40	50
	PIST-10B	PIST-10S	10	12	9.7	12.8	20/50	50
	PIST-12B	PIST-12S	12	16	12.0	15.6	25/65	50
	PIST-17B	PIST-17S	17	20	16.7	21.1	30/85	50
	PIST-23B	PIST-23S	23	25	23.2	28.4	40/110	50
	PIST-29B	PIST-29S	29	32	28.9	34.5	50/135	50
	PIST-36B	PIST-36S	36	40	36.8	42.4	60/170	30
	PIST-48B	PIST-48S	48	50	48.0	54.5	75/220	30
	PISG-17B	PISG-17S	17	20	15.8	21.1	35/85	50
	PISG-23B	PISG-23S	23	25	22.0	28.4	45/110	50
	PISG-29B	PISG-29S	29	32	27.8	34.5	55/135	50
	PISG-36B	PISG-36S	36	40	36.2	42.4	65/170	30
	PISG-48B	PISG-48S	48	50	47.1	54.5	85/220	30
	PIHG-56B	PIHG-56S	56	68	57.0	67.5	110/270	30
	PIHG-70B	PIHG-70S	70	80	68.0	79.6	130/320	30
	PIHG-95B	PIHG-95S	95	106	92.5	107.0	170/430	30
	PIHG-125B	PIHG-125S	125	146	126.9	146.0	230/580	20

Approvals



PIS/PIH Index

min.	max.
Ductility	
Fatigue reversed bending	
Compression resistance	
Low temperature performance	
Weathering resistance	


For robotics and automation applications. UL 94 V0. Excellent UV resistance and weathering characteristics
 PIS: Medium-wall (Nominal width 07 to 48) / PIH: Heavy-wall (Nominal width 56 to 125)
 Very good reversed bending characteristics. Good mechanical characteristics even under extreme conditions, such as low temperatures and low humidity

Materials	Temperature range	Colour
Specially modified polyamide 12	-50°C to +95°C	Black/Grey
Certification	Short-term to: +150°C	
Free from halogens, REACH compliant and RoHS compliant	Weathering characteristics	UV Resistance
	Excellent	Excellent

PMAFLEX

Type POS & PUE conduit

Type POS - Highly flexible, medium-duty

	Order no. (black)	Conduit size		Inside Ø (mm)	Outside Ø (mm)	Stat./Dyn. radius (mm)	PU (m)
		NW	Metric				
	POST-10B	10	12	9.9	12.8	20/50	50
	POST-12B	12	16	12.1	15.6	35/75	50
	POST-17B	17	20	16.7	21.1	30/85	50
	POST-23B	23	25	23.2	28.4	40/110	50
	POST-29B	29	32	28.8	34.5	50/135	50
	POST-36B	36	40	36.6	42.4	60/170	30
	POST-48B	48	50	48.2	54.5	75/220	30
	POSG-29B	29	32	27.8	34.4	55/135	50
	POSG-36B	36	40	36.2	42.4	65/170	30
	POSG-48B	48	50	47.2	54.5	85/220	30
	POSG-70B	70	80	67.4	79.6	130/320	30
	POSG-95B	95	106	92.3	106.0	170/430	30


POS Index

min.	max.
Ductility	
Fatigue reversed bending	
Compression resistance	
Low temperature performance	
Weathering resistance	

For automation as well as for machine building and industrial installations, especially where continuous movements occur
 Excellent reversed bending performance and flexibility
 Good impact resistance. Good resistance against strong acids

Materials	Temperature range	Colour
Specially modified polypropylene	-25°C to +95°C	Black
Certification	Short-term to: +130°C	
Free from halogens, REACH compliant and RoHS compliant	Fatigue resistance	UV Resistance
	-	-

Type PUE - Highly flexible, medium-duty

	Order no. (black)	Conduit size		Inside Ø (mm)	Outside Ø (mm)	Stat./Dyn. radius (mm)	PU (m)
		NW	Metric				
	PUET-23B	23	25	23.1	28.4	40/75	50
	PUET-29B	29	32	29.0	34.5	45/90	30
	PUET-36B	36	40	36.8	42.4	55/110	30
	PUET-48B	48	50	48.4	54.5	70/140	21
	PUEG-56B	56	68	57.2	67.5	90/170	30
	PUEG-70B	70	80	68.4	79.6	105/220	30

PUE Index

min.	max.
Ductility	
Fatigue reversed bending	
Compression resistance	
Low temperature performance	
Weathering resistance	


For robotic applications with multi-axial movements
 Specially suitable for tight bending-radii
 Highest reversed bending resistance
 Excellent chafing characteristics

Materials	Temperature range	Colour
Specially formulated polyurethane	-60°C to +50°C	Black
Certification		
Free from halogens, REACH compliant and RoHS compliant	Fatigue resistance	UV Resistance
	-	-

PMAFLEX

Type PVD & VAM conduit

Type PVD - Pliable, medium-duty

	Order no. (transparent)	Conduit size		Inside Ø (mm)	Outside Ø (mm)	Stat. radius (mm)	PU (m)
		NW	Metric				
	PVDT-10P	10	12	9.6	12.8	20	50
	PVDT-12P	12	16	12.0	15.6	25	50
	PVDT-17P	17	20	16.6	21.1	35	50
	PVDT-23P	23	25	23.0	28.4	45	50
	PVDT-29P	29	32	28.7	34.5	55	50


For long-term high temperature requirements in machine building applications
 Excellent chemical resistance also at high temperatures
 Very good abrasion resistance
 High stiffness

PVD Index

min.	max.
Ductility	
Fatigue reversed bending	
Compression resistance	
Low temperature performance	
Weathering resistance	

Materials	Temperature range	Colour
Specially formulated PVDF	-60°C to +150°C	Transparent
Certification	Fire performance	UV Resistance
Free from halogens, REACH compliant and RoHS compliant	Self-extinguishing / free from cadmium	Excellent

Type VAM - Flexible, heavy-duty

	Order no. (black)	Order no. (grey)	Conduit size		Inside Ø (mm)	Outside Ø (mm)	Stat. radius (mm)	PU (m)
			NW	Metric				
	VAMT-10B	VAMT-10S	10	12	9.6	12.8	25	50
	VAMT-12B	VAMT-12S	12	16	12.0	15.6	30	50
	VAMG-17B	VAMG-17S	17	20	15.5	21.1	45	50
	VAMG-23B	VAMG-23S	23	25	21.6	28.4	60	50
	VAMG-29B	VAMG-29S	29	32	27.6	34.5	70	50
	VAMG-36B	VAMG-36S	36	40	35.8	42.4	85	30
	VAMG-48B	VAMG-48S	48	50	46.6	54.5	110	30

For high fire and passenger safety requirements in interior applications such as passenger areas or public buildings
 HL3 acc. to EN 45545-2
 NFPA 130 compliant
 High impact and compression strength
 High stiffness

VAM Index


min.	max.
Ductility	
Fatigue reversed bending	
Compression resistance	
Low temperature performance	
Weathering resistance	

Materials	Temperature range	Colour
Specially formulated polyamide 6	-40°C to +105°C	Black/Grey
Certification	Fire performance	UV Resistance
Free from halogens, REACH compliant and RoHS compliant	Short-term to: +160°C Minimal development of smoke and gases	-

PMAFLEX

Type VAML & VCS conduit

Type VAML - Flexible, medium-duty

	Order no. (black)	Order no. (grey)	Conduit size		Inside Ø (mm)	Outside Ø (mm)	Stat. radius (mm)	PU (m)
			NW	Metric				
	VAMLT-10B	VAMLT-10S	10	12	9.7	12.8	20	50
	VAMLT-12B	VAMLT-12S	12	16	12.1	15.6	25	50
	VAMLG-17B	VAMLG-17S	17	20	15.8	21.1	40	50
	VAMLG-23B	VAMLG-23S	23	25	21.9	28.4	50	50
	VAMLG-29B	VAMLG-29S	29	32	27.9	34.5	60	50
	VAMLG-36B	VAMLG-36S	36	40	36.2	42.4	75	30
	VAMLG-48B	VAMLG-48S	48	50	47.0	54.5	90	30
	VAMLG-56B	VAMLG-56S	56	68	56.9	67.5	120	30
	VAMLG-70B	VAMLG-70S	70	80	68.0	79.6	140	10
	VAMLG-95B	VAMLG-95S	95	106	92.5	107.0	190	10
	VAMLG-125B	VAMLG-125S	125	146	126.9	146.0	260	6


VAML Index

min.	max.
Ductility	
Fatigue reversed bending	
Compression resistance	
Low temperature performance	
Weathering resistance	

For high fire and passenger safety requirements in interior applications such as passenger areas or public buildings
 HL3 acc. to EN 45545-2
 NFPA 130 compliant
 Good flexibility. Good impact strength

Materials	Temperature range	Colour
Specially formulated polyamide 6	-40°C to +105°C	Black/Grey
Certification	Short-term to: +160°C	
Free from halogens, REACH compliant and RoHS compliant	Fire performance	UV Resistance
	Minimal development of smoke and gases	-

Type VCS - Flexible, heavy-duty

	Order no. (black)	Order no. (grey)	Conduit size		Inside Ø (mm)	Outside Ø (mm)	Stat. radius (mm)	PU (m)
			NW	Metric				
	VCST-07B	VCST-07S	07	10	6.6	10.0	20	100
	VCST-10B	VCST-10S	10	12	9.6	12.8	25	50
	VCST-12B	VCST-12S	12	16	12.0	15.6	30	50
	VCST-17B	VCST-17S	17	20	16.5	21.1	40	50
	VCSG-17B	VCSG-17S	17	20	15.7	21.1	45	50
	VCSG-23B	VCSG-23S	23	25	21.8	28.4	60	50
	VCSG-29B	VCSG-29S	29	32	27.6	34.5	70	50
	VCSG-36B	VCSG-36S	36	40	35.7	42.4	85	30
	VCSG-48B	VCSG-48S	48	50	46.7	54.5	110	30
	VCSG-56B	VCSG-56S	56	68	56.2	67.5	135	30
	VCSG-70B	VCSG-70S	70	80	67.1	79.6	160	10
	VCSG-95B	VCSG-95S	95	106	91.0	107.0	220	10

VCS Index

min.	max.
Ductility	
Fatigue reversed bending	
Compression resistance	
Low temperature performance	
Weathering resistance	


For static external installations
 High compression and impact strengths at low temperatures and low humidity
 Good ductility. Very good resistance to ultra violet rays and weathering

Materials	Temperature range	Colour
Specially formulated polyamide 6	-50°C to +105°C	Black/Grey
Certification	Short-term to: +160°C	
Free from halogens, REACH compliant and RoHS compliant	Fatigue resistance	UV Resistance
	-	Very good

PMAFLEX

Type VOH & PLR conduit

Type VOH - Pliable, very heavy-duty

	Order no. (black)	Order no. (grey)	Conduit size			Inside Ø (mm)	Outside Ø (mm)	Stat. radius (mm)	PU (m)
			NW	Metric	Profile				
	VOHD-07B	VOHD-07S	07	10		6.3	10.0	20	50
	VOHD-10B	VOHD-10S	10	12		9.5	12.8	25	50
	VOHD-12B	VOHD-12S	12	16		11.9	15.6	30	50
	VOHG-17B	VOHG-17S	17	20		15.1	21.1	45	50
	VOHG-23B	VOHG-23S	23	25		21.6	28.4	60	50
	VOHG-29B	VOHG-29S	29	32		27.3	34.5	70	50
	VOHG-36B	VOHG-36S	36	40		35.6	42.4	85	30
	VOHG-48B	VOHG-48S	48	50		46.5	54.5	110	30
	VOHG-56B	VOHG-56S	56	68		55.7	67.5	135	10
	VOHG-70B	VOHG-70S	70	80		67.0	79.6	160	10
	VOHG-95B	VOHG-95S	95	106		91.3	107.0	220	10
	VOHG-125B	VOHG-125S	125	146		125.4	146.0	300	6


For applications in heavy machine and plant construction
 High compression resistance
 Highest degree of mechanical protection
 Very good UV and weathering resistance
 Good fire safety characteristics

VOH Index

min.	max.
Ductility	
Fatigue reversed bending	
Compression resistance	
Low temperature performance	
Weathering resistance	

Materials	Temperature range	Colour
Specially modified polyamide 6	-40°C to +105°C	Black/Grey
Certification	Short-term to: +160°C	
Free from halogens, REACH compliant and RoHS compliant	Fire performance	UV Resistance
	Good	Very good

Type PLR - flexible, medium-wall

	Order no. (black)	Order no. (grey)	Conduit size			Inside Ø (mm)	Outside Ø (mm)	Stat. radius (mm)	PU (m)
			NW	Metric	Profile				
	PLRT-07B	PLRT-07S	07	10	T	6.8	10.0	15	50
	PLRT-10B	PLRT-10S	10	12	T	9.8	12.8	20	50
	PLRT-12B	PLRT-12S	12	16	T	12.2	15.6	25	50
	PLRG-17B	PLRG-17S	17	20	G	15.9	21.1	40	50
	PLRG-23B	PLRG-23S	23	25	G	22.0	28.4	50	50
	PLRG-29B	PLRG-29S	29	32	G	28.0	34.5	60	50
	PLRG-36B	PLRG-36S	36	40	G	36.3	42.4	75	30
	PLRG-48B	PLRG-48S	48	50	G	47.2	54.5	90	30

In light rail rolling stock applications e.g. Tram, Metro, Monorail
 HL2 acc. to EN 45545-2
 Good pressure resistance
 Very good fire safety characteristics

PLR Index


min.	max.
Ductility	
Fatigue reversed bending	
Compression resistance	
Low temperature performance	
Weathering resistance	

Materials	Temperature range	Colour
Specially modified polyamide 6	-40°C to +105°C	Black/Grey
Certification	Short-term to: +160°C	
Free from halogens, REACH compliant and RoHS compliant	Fire performance	UV Resistance
	Self-extinguishing / Very good	-

PMAFLEX Multilayer






Type XPCL & XSOL conduit

Type XPCL - Highly flexible, medium-duty


	Order no. (black/blue)	Order no. (grey/blue)	Conduit size		Inside Ø (mm)	Outside Ø (mm)	Stat. radius (mm)	PU (m)
			NW	Metric				
	XPCLT-10BB	XPCLT-10SB	10	12	9.6	12.8	20	50
	XPCLT-12BB	XPCLT-12SB	12	16	11.9	15.6	25	50
	XPCLT-17BB	XPCLT-17SB	17	20	16.5	21.1	35	50
	XPCLG-17BB	XPCLG-17SB	17	20	15.7	21.1	40	50
	XPCLG-23BB	XPCLG-23SB	23	25	21.9	28.4	50	50
	XPCLG-29BB	XPCLG-29SB	29	32	27.6	34.5	60	50
	XPCLG-36BB	XPCLG-36SB	36	40	36.0	42.4	75	30
	XPCLG-48BB	XPCLG-48SB	48	50	47.1	54.5	90	30

For machine building and equipment with high requirements
 Allows easy cable insertion due to low friction inner layer
 Very good ductility and good reversed bending characteristics
 Good mechanical characteristics even under extreme conditions, such as low temperatures and low humidity

XPCL Index

min.	max.	Materials	Temperature range	Colour
Ductility		Outer layer: Specially formulated polyamide 6	-50°C to +105°C	Black/Blue
Fatigue reversed bending		Intermediate layer: Specially bonding compound	Short-term to: +160°C	Grey/Blue
Compression resistance		Inner layer: Specially modified polyethylene		
Low temperature performance		Certification	Fire performance	UV Resistance
Weathering resistance		Free from halogens, REACH compliant and RoHS compliant	Self-extinguishing	-

Type XSOL - Highly flexible, medium-duty






	Order no. (black/green)	Conduit size		Inside Ø (mm)	Outside Ø (mm)	Stat. radius (mm)	PU (m)
		NW	Metric				
	XSOLT-10BG	10	12	9.5	12.8	20	50
	XSOLT-12BG	12	16	11.9	15.6	25	50
	XSOLG-17BG	17	20	15.6	21.1	40	50
	XSOLG-23BG	23	25	21.9	28.4	50	50
	XSOLG-29BG	29	32	27.7	34.5	60	50
	XSOLG-36BG	36	40	36.4	42.4	75	30
	XSOLG-48BG	48	50	47.2	54.5	90	30

All-purpose, especially in long-term external applications, e.g. energy technology
 Very good resistance to UV and weathering
 Very high ductility and reversed bending resistance
 Very good mechanical strength
 High impact resistance even under extreme conditions, such as low temperatures and low humidity

Approvals




XSOL Index

min.	max.	Materials	Temperature range	Colour
Ductility		Outer layer: Specially formulated polyamide 12	-50°C to +95°C	Black/Green
Fatigue reversed bending		Intermediate layer: Specially bonding compound	Short-term to: +150°C	
Compression resistance		Inner layer: Specially modified polyamide 6		
Low temperature performance		Certification	Fire performance	UV Resistance
Weathering resistance		Free from halogens, REACH compliant and RoHS compliant	Good fire safety characteristics Self-extinguishing	Very good

PMAFLEX Multilayer

Type XVCS1H & XVCS2H conduit

Type XVCS1H - Flexible, heavy-duty


	Order no. (black/green)	Conduit size		Inside Ø (mm)	Outside Ø (mm)	Stat. radius (mm)	PU (m)
		NW	Metric				
	XVCS1H-10BG	10	12	9.5	12.8	20	50
	XVCS1H-12BG	12	16	11.8	15.6	25	50
	XVCS1H-17BG	17	20	15.5	21.1	40	50
	XVCS1H-23BG	23	25	21.7	28.4	50	50
	XVCS1H-29BG	29	32	27.5	34.5	60	50
	XVCS1H-36BG	36	40	35.8	42.4	75	30
	XVCS1H-48BG	48	50	47.1	54.5	90	30

For track side applications and other exterior static applications
 Easy layouting through: High conduit ductility and formability / Low friction inner layer facilitates cable insertion
 Excellent impact characteristics at low temperatures

XVCS1H Index

min.	max.	Materials	Temperature range	Colour
Ductility		Outer layer: Specially formulated polyamide 6	-50°C to +90°C	Black/Green
Fatigue reversed bending		Intermediate layer: Specially bonding compound	Short-term to: +120°C	
Compression resistance		Inner layer: Specially modified polyolefin		
Low temperature performance		Certification	Atmospheric corrosion resistance	UV Resistance
Weathering resistance		Free from halogens, REACH compliant and RoHS compliant	Very good	Very good

Type XVCS2H - Flexible, heavy-duty

	Order no. (black/green)	Conduit size		Inside Ø (mm)	Outside Ø (mm)	Stat. radius (mm)	PU (m)
		NW	Metric				
	XVCS2H-10BG	10	12	9.2	12.8	20	50
	XVCS2H-12BG	12	16	11.7	15.6	25	50
	XVCS2H-17BG	17	20	15.2	21.1	35	50
	XVCS2H-23BG	23	25	22.0	28.4	40	50
	XVCS2H-29BG	29	32	27.7	34.5	50	50
	XVCS2H-36BG	36	40	35.8	42.4	60	30
	XVCS2H-48BG	48	50	46.8	54.5	70	30

For track side applications and other exterior static applications with high UV exposure
 Easy layouting through: High conduit ductility and formability / Low friction inner layer facilitates cable insertion
 Excellent impact characteristics at low temperatures


XVCS2H Index

min.	max.	Materials	Temperature range	Colour
Ductility		Outer layer: Specially formulated polyamide 12	-50°C to +90°C	Black/Green
Fatigue reversed bending		Intermediate layer: Specially bonding compound	Short-term to: +120°C	
Compression resistance		Inner layer: Specially modified polyolefin		
Low temperature performance		Certification	Atmospheric corrosion resistance	UV Resistance
Weathering resistance		Free from halogens, REACH compliant and RoHS compliant	Excellent	Excellent

PMAFLEX Multilayer

Type XVCSF & XPCS conduit

Type XVCSF - Flexible, heavy-duty

	Order no. (black/blue)	Profile (T/G)	Conduit size		rec. fitting thread size		Inside Ø (mm)	Outside Ø (mm)	Stat. radius (mm)	Weight (kg/100m)	PU (m)
			NW	Metric	PG	Metric					
	XVCSFT-07BB	T	7	9	9	M12x1.5	6.7	10.0	15	2.5	50
	XVCSFT-10BB	T	10	12	9	M12x1.5	9.6	12.8	20	3.1	50
	XVCSFT-12BB	T	12	16	11	M16x1.5	11.9	15.6	25	4.2	50
	XVCSFG-17BB	G	17	20	16	M20x1.5	15.6	21.1	40	7.5	50
	XVCSFG-23BB	G	23	25	21	M25x1.5	21.5	28.4	50	12.0	50
	XVCSFG-29BB	G	29	32	29	M32x1.5	27.7	34.5	60	15.0	50
	XVCSFG-36BB	G	36	40	36	M40x1.5	35.9	42.4	75	19.0	30
	XVCSFG-48BB	G	48	50	48	M50x1.5	46.8	54.5	90	25.0	30

Multilayer conduit for external rail applications

Rail static external applications such as under carriage, bogie, etc.






High compression and impact strengths at low temperature and low humidity

Good flexibility and very good UV resistance and weathering characteristics


Compatible with PMAFIX Pro, PMAFIX, PMA Smart Line and accessories

EN 45545-2 HL2 (R22 & R23)

XVCSF Index

min.	max.	Materials	Temperature range	Colour
Ductility		Outer layer: Specially formulated polyamide 6	-50°C to +105°C	Black/Blue
Fatigue reversed bending		Inner layer: Specially modified polyamide 6	Short-term to: +160°C	
Compression resistance				
Low temperature performance				
Weathering resistance				
		Certification	Fire performance	UV Resistance
		Free from halogens and cadmium	Self-extinguishing	Very good
		RoHS and REACH compliant		

Type XPCS - Very flexible, heavy-duty

	Order no. (black/green)	Conduit size		Inside Ø (mm)	Outside Ø (mm)	Stat. radius (mm)	Dyn. radius (mm)	PU (m)
		NW	Metric					
	XPCST-07BG	7	10	6.9	10.0	15	40	50
	XPCST-10BG	10	12	9.8	12.8	20	50	50
	XPCST-12BG	12	16	12.1	15.6	25	65	50
	XPCSG-17BG	17	20	15.8	21.1	35	85	50
	XPCSG-23BG	23	25	21.9	28.4	45	110	50
	XPCSG-29BG	29	32	27.7	34.5	55	135	50
	XPCSG-36BG	36	40	36.6	42.4	65	170	30
	XPCSG-48BG	48	50	47.5	54.5	85	220	30
	XPCSG-56BG.30	56	68	56.7	67.5	110	270	30
XPCSG-70BG.30	70	80	67.5	79.6	130	320	10	

For dynamic outside applications in railway vehicles

For outdoor applications with highest requirements to UV and weathering resistance






Extensive railway approvals

Good mechanical characteristics even under extreme conditions, such as low temperatures and low humidity

HL2 acc. to EN 45545-2

NFPA 130 compliant


XPCS Index

min.	max.	Materials	Temperature range	Colour
Ductility		Outer layer: Specially formulated polyamide 12	-40°C to +95°C	Black/Green
Fatigue reversed bending		Inner layer: Specially formulated polyamide 6	Short-term to: +150°C	
Compression resistance				
Low temperature performance				
Weathering resistance				
		Certification	Fire performance	UV Resistance
		Free from halogens, REACH compliant	Self-extinguishing	Excellent
		and RoHS compliant		

PMAFLEX Multilayer






Type XPCSF & XTPC conduit

Type XPCSF - Very flexible, heavy-duty


	Order no. (black/orange)	Conduit size		Inside Ø (mm)	Outside Ø (mm)	Stat. radius (mm)	Dyn. radius (mm)	PU (m)
		NW	Metric					
	XPCSFT-07BO	07	10	6.5	10.0	15	40	100
	XPCSFT-10BO	10	12	9.6	12.8	20	50	50
	XPCSFT-12BO	12	16	11.8	15.6	25	65	50
	XPCSFG-17BO	17	20	15.5	21.1	35	85	50
	XPCSFG-23BO	23	25	21.5	28.4	45	110	50
	XPCSFG-29BO	29	32	27.4	34.5	55	135	50
	XPCSFG-36BO	36	40	36.0	42.4	65	170	30
	XPCSFG-48BO	48	50	47.1	54.5	85	220	30

For dynamic outside applications in railway vehicles
 For outdoor applications with highest requirements to UV and weathering resistance
 Extensive railway approvals
 Excellent flexibility
 Very good mechanical characteristics even under extreme conditions, such as low temperatures and low humidity
 HL3 acc. to EN 45545-2

XPCSF Index






min.	max.	Materials	Temperature range	Colour
Ductility		Outer layer: Specially formulated polyamide 12	-40°C to +95°C	Black/Orange
Fatigue reversed bending		Inner layer: Specially formulated polyamide 12	Short-term to: +150°C	
Compression resistance				
Low temperature performance				
Weathering resistance				
		Certification	Fire performance	UV Resistance
		Free from halogens, REACH compliant and RoHS compliant	Self-extinguishing	Excellent

Type XTPC - Highly flexible, medium-duty

	Order no. (black/orange)	Conduit size		Inside Ø (mm)	Outside Ø (mm)	Stat. radius (mm)	Dyn. radius (mm)	PU (m)
		NW	Metric					
	XTPCG-17BB.50	17	20	15.2	21.1	30	75	50
	XTPCG-23BB.50	23	25	21.2	28.4	40	100	50
	XTPCG-29BB.50	29	32	26.8	34.5	50	120	50
	XTPCG-36BB.50	36	40	35.5	42.4	60	150	30
	XTPCG-48BB.50	48	50	46.5	54.5	80	190	30
	XTPCG-56BB.50	56	68	56.2	67.5	105	235	30
	XTPCG-70BB.50	70	80	67.3	79.6	120	280	30

For dynamic conduit systems in robotics and automation industry
 For outdoor applications with good requirements to UV and weathering resistance
 With wear indication function. High resistance to continuous bending
 No abrupt conduit failure due to high tear propagation resistance
 Very high abrasion resistance. High resistance to torsion
 Suitable for tight bending-radii
 Long service life


XTPC Index

min.	max.	Materials	Temperature range	Colour
Ductility		Outer layer: Thermoplastic copolyester	-40°C to +105°C	Black/Blue
Fatigue reversed bending		Inner layer: Thermoplastic copolyester	Short-term to: +150°C	
Compression resistance				
Low temperature performance				
Weathering resistance				
		Certification	Fire performance	UV Resistance
		Free from halogens, REACH compliant and RoHS compliant	Self-extinguishing	Good

PMA overextruded conduits

Type JFBD & JXPCSF conduit

Type JFBD - Flexible, medium-duty

	Order no.	Conduit size		Inside Ø (mm)	Outside Ø (mm)	Stat. radius (mm)	Dyn. radius (mm)	PU (mm)
		NW	Metric					
	JFBDT-12C01	12	16	12.0	16.0	40	100	50
	JFBDG-17C01	17	20	15.7	21.5	55	125	50
	JFBDG-23C01	23	25	21.8	28.7	75	170	50
	JFBDG-29C01	29	32	27.6	34.9	90	210	50
	JFBDG-36C01	32	40	36.3	43.0	110	260	30
	JFBDG-48C01	48	50	47.3	54.8	140	330	30

Approvals




Smooth easy to clean out layer
 High reversed bending stresses
 Excellent flexibility in combination with high strength
 High resistance to chemicals and cleaning agents
 For indoor food zone – non contact
 Outer layer made from FDA compliant material
 Corrosion free

JFBD Index

min.	max.
Ductility	
Fatigue reversed bending	
Compression resistance	
Low temperature performance	
Weathering resistance	

Materials	Colour
Conduit: made from high-grade, specially formulated polyamide 12	Corrugated conduit: blue
Overextrusion: made from modified polyamide elastomer	Overextrusion: blue, translucent
Certification	UV Resistance
FDA 21 CFR / EU 10/2011 compliant outer layer material; ECOLAB certificate	-

Type JXPCSF - Highly flexible, heavy-duty


	Order no. (black/orange)	Profile (T/G)	Conduit size		d1 (mm)	d2 (mm)	d3 (mm)	Stat. radius (mm)	Dyn. radius (mm)	Weight (kg/100m)	PU (m)
			NW	Metric							
	JXPCSFT-12BO	T	12	16	11.8	15.6	16.0	40	100	4.9	50
	JXPCSFG-17BO	G	17	20	15.5	21.1	21.6	55	125	8.6	50
	JXPCSFG-23BO	G	23	25	21.5	28.4	28.8	75	170	13.5	50
	JXPCSFG-29BO	G	29	32	27.4	34.5	34.8	90	210	16.7	50
	JXPCSFG-36BO	G	36	40	36.0	42.4	42.8	110	260	21.6	30
	JXPCSFG-48BO	G	48	50	47.1	54.5	54.8	140	330	29.4	30

Over-extruded conduit for rail applications designed specifically to prevent the accumulation of ice under extreme climate conditions
 For dynamic or static external applications in railway vehicles - on the roof, between carriages and on bogies
 Excellent flexibility. Smooth outer layer prevents accumulation of ice
 Easy cleaning and high resistance to chemicals and cleaning agents. Compatible with PMAFIX Pro and accessories
 EN 45545-2 HL3 (R22 & R23)

JXPCSF Index

min.	max.
Ductility	
Fatigue reversed bending	
Compression resistance	
Low temperature performance	
Weathering resistance	


Materials	Temperature range	Colour
Multi layer conduit: specially formulated polyamide 12	-50°C to +95°C	Black/Orange
Overextrusion: specially formulated polyamide 12	Short-term to: +150°C	
Certification	Fire performance	UV Resistance
Free from halogens and cadmium RoHS and REACH compliant	Self-extinguishing	Excellent



PMA overextruded conduits

Type JLLPA conduit

Type JLLPA - Flexible, heavy-duty


	Order no. (black)	Conduit size		d1 (mm)	d2 (mm)	d3 (mm)	Stat. radius (mm)	Weight (kg/100m)	PU (m)
		NW	Metric						
	JLLPA-12A	12	16	12.1	15.6	15.8	40	4.5	50
	JLLPAG-17A	17	20	15.8	21.1	21.2	55	7.4	50
	JLLPAG-23A	23	25	21.9	28.4	28.5	75	11.4	50
	JLLPAG-29A	29	32	27.8	34.5	34.7	90	15.4	50
	JLLPAG-36A	36	40	36.1	42.4	42.6	110	18.6	30
	JLLPAG-48A	48	50	46.9	54.5	54.6	140	27.4	30

Flexible, smooth over-extruded conduit for applications with cleaning requirements
 For static applications in machine building, installation and construction industries
 For general applications with cleaning requirements
 Smooth outer layer for easy cleaning, good resistance to chemicals and cleaning agents. Corrosion free
 Flexibility in combination with high strength. Compatible with PMAFIX Pro
 UL Recognition according to UL 1696 (file E80294)

JLLPA Index

min.	max.
Ductility	██████████
Fatigue reversed bending	██████████
Compression resistance	██████████
Low temperature performance	██████████
Weathering resistance	██████████


Materials	Temperature range	Colour
Conduit: High-grade, specially formulated polyamide 6	-18°C to +105°C	Black
Overextrusion: modified polyamide 6	Short-term to: +160°C	
Certification	Fire performance	UV Resistance
Free from halogens and cadmium	Self-extinguishing	Very good
RoHS and REACH compliant		



PMAFLEX Plus

Type CUS & PUS conduit

Type CUS - Very flexible, medium-duty

	Order no. (black)	Order no. (grey)	Conduit size			Inside Ø (mm)	Outside Ø (mm)	Stat. radius (mm)	PU (m/ft)
			Inch	NW	Metric				
	CUSG-17B	CUSG-17S	½	17	20	15.5	21.1	40	31/100
	CUSG-23B	CUSG-23S	¾	23	25	21.7	28.4	50	31/100
	CUSG-29B	CUSG-29S	1	29	32	27.4	34.5	60	31/100
	CUSG-36B	CUSG-36S	1 ¼	36	40	35.5	42.4	75	31/100
	CUSG-48B	CUSG-48S	1 ½	48	50	46.5	54.5	90	31/100

For machine building and installation industries
 For electrical installations, especially in the US market
 Inexpensive solution for requirements acc. to UL 1660 (UL Listing)
 Good ductility and reversed bending characteristics
 Very good mechanical properties even under extreme conditions, such as low temperatures and low humidity

Approvals




CUS Index

min.	max.
Ductility	
Fatigue reversed bending	
Compression resistance	
Low temperature performance	
Weathering resistance	

Materials	Temperature range	Colour
Specially modified polyamide 6	-40°C to +105°C	Black/Grey
Certification	Short-term to: +160°C	
Free from halogens, REACH compliant and RoHS compliant	Fire protection	UV Resistance
	Self-extinguishing, acc. to UL 94 V2	-

Type PUS - Very flexible, heavy-duty

	Order no. (black)	Order no. (grey)	Conduit size			Inside Ø (mm)	Outside Ø (mm)	Stat./Dyn. radius (mm)	PU (m/ft)
			Inch	NW	Metric				
	PUSG-17B	PUSG-17S	½	17	20	15.5	21.1	35/85	31/100
	PUSG-23B	PUSG-23S	¾	23	25	21.6	28.4	45/110	31/100
	PUSG-29B	PUSG-29S	1	29	32	27.5	34.5	55/135	31/100
	PUSG-36B	PUSG-36S	1 ¼	36	40	35.9	42.4	65/170	31/100
	PUSG-48B	PUSG-48S	1 ½	48	50	47.0	54.5	85/220	31/100

For long-term external applications with approval acc. to UL 1660 (UL Listing)
 For dynamic applications
 Very good reversed bending resistance
 Very good mechanical strength at low temperatures
 Excellent resistance to ultra violet rays and weathering
 cULUS listed

Approvals



PUS Index


min.	max.
Ductility	
Fatigue reversed bending	
Compression resistance	
Low temperature performance	
Weathering resistance	

Materials	Temperature range	Colour
Specially modified polyamide 12	-50°C to +95°C	Black/Grey
Certification	Short-term to: +150°C	
Free from halogens, REACH compliant and RoHS compliant	Fire protection	UV Resistance
	Self-extinguishing, acc. to UL 94 V2	Excellent

PMAFLEX Plus

Type PACOF conduit

Type PACOF - Flexible, divisible

	Order no. (black)	Conduit size		Inside Ø (mm)	Outside Ø (mm)	Stat. radius (mm)	PU (m)
		NW	Metric				
	PACOF-07B	07	10	5.6	10.0	30	50
	PACOF-10B	10	12	8.5	12.8	33	50
	PACOF-12B	12	16	11.0	15.6	35	50
	PACOF-17B	17	20	15.5	21.1	45	50
	PACOF-23B	23	25	22.1	28.4	70	50
	PACOF-29B	29	32	27.2	34.5	120	50
	PACOF-36B	36	40	32.0	42.4	145	30
	PACOF-48B	48	50	43.9	54.1	150	30
	PACOF-70B	70	80	62.0	79.0	190	10

HL3 according to EN45545-2

NFPA 130 compliant

For machine building and plant construction

For trouble-free retrofitting and applicable for repairs

Can be opened and closed again in longitudinal direction any time

Good ductility

Good compression resistance

PACOF Index


min.	max.
Ductility	
Fatigue reversed bending	
Compression resistance	
Low temperature performance	
Weathering resistance	

Materials	Temperature range	Colour
Specially modified polyamide 6	-40°C to +105°C	Black
Certification	Short-term to: +160°C	
Free from halogens, REACH compliant and RoHS compliant	Fire performance	UV Resistance
	-	-

PMA Divisible System

Type PPCOF conduit

Type PPCOF - Flexible, divisible

	Order no. (black)	Conduit size		Inside Ø (mm)	Outside Ø (mm)	Stat. radius (mm)	PU (m)
		NW	Metric				
	PPCOF-07B	07	10	5.6	10.0	25	50
	PPCOF-10B	10	12	8.5	12.8	28	50
	PPCOF-12B	12	16	11.0	15.6	35	50
	PPCOF-17B	17	20	15.1	21.1	45	50
	PPCOF-23B	23	25	22.1	28.4	60	50
	PPCOF-29B	29	32	26.6	34.5	100	50
	PPCOF-36B	36	40	31.8	42.4	120	30
	PPCOF-48B	48	50	43.9	54.1	140	30
	PPCOF-70B	70	80	60.5	78.0	200	10

PPCOF Index

min.	max.
Ductility	
Fatigue reversed bending	
Compression resistance	
Low temperature performance	
Weathering resistance	


For machine building and plant construction
 For trouble-free retrofitting and applicable for repairs
 Can be opened and closed again in longitudinal direction any time
 Good reversed bending resistance


Materials	Temperature range	Colour
Specially modified polypropylene PP	-20°C to +105°C	Black
	Short-term to +150°C	
Certification	Fire performance	UV Resistance
-	-	-

PMA Smart Line

Type LLPA conduit

Type LLPA - Very flexible, medium-duty Smartline

	Order no. (black)	Order no. (grey)	Conduit size			Inside Ø (mm)	Outside Ø (mm)	Stat. radius (mm)	PU (m)
			NW	Metric	Profile				
	LLPA-07A	LLPA-07S	07	10	T	6.6	10.0	15	50
	LLPA-10A	LLPA-10S	10	12	T	9.8	12.8	20	50
	LLPA-12A	LLPA-12S	12	16	T	12.1	15.6	25	50
	LLPA-17A	LLPA-17S	17	20	T	16.8	21.1	35	50
	LLPA-23A	LLPA-23S	23	25	T	23.2	28.4	45	50
	LLPA-29A	LLPA-29S	29	32	T	28.8	34.5	55	50
	LLPA-36A	LLPA-36S	36	40	T	36.7	42.4	65	30
	LLPA-48A	LLPA-48S	48	50	T	48.2	54.5	80	30

	LLPAG-17A	LLPAG-17S	17	20	G	15.8	21.1	40	50
	LLPAG-23A	LLPAG-23S	23	25	G	21.9	28.4	50	50
	LLPAG-29A	LLPAG-29S	29	32	G	27.8	34.5	60	50
	LLPAG-36A	LLPAG-36S	36	40	G	36.1	42.4	75	30
	LLPAG-48A	LLPAG-48S	48	50	G	46.9	54.5	90	30
	LLPAG-56A	LLPAG-56S	56	68	G	56.7	67.5	120	30
	LLPAG-70A	LLPAG-70S	70	80	G	67.5	79.6	140	10
	LLPAG-95A	LLPAG-95S	95	106	G	91.6	107.0	190	10
	LLPAG-125A	LLPAG-125S	125	146	G	125.5	146.0	260	06

Approvals



LLPA Index

min.	max.
Ductility	
Fatigue reversed bending	
Compression resistance	
Low temperature performance	
Weathering resistance	


For machine building, installation and construction industries
 Good ductility
 Good mechanical characteristics

Materials	Temperature range	Colour
Specially modified polyamide 6	-40°C to +105°C	Black/Grey
Certification	Self extinguishing	UV Resistance
Free from halogens, REACH compliant and RoHS compliant	Short-term to: +160°C acc. to UL 94 V2	-

PMA Smart Line

Type LLPF

Type LLPF - Very flexible, medium-duty

	Order no. (black)	Order no. (grey)	Conduit size			Inside Ø (mm)	Outside Ø (mm)	Stat. radius (mm)	PU (m)
			NW	Metric	Profile				
	LLPF-07A	LLPF-07S	7	10	T	6.8	10.0	15	50
	LLPF-10A	LLPF-10S	10	12	T	9.8	12.8	20	50
	LLPF-12A	LLPF-12S	12	16	T	12.2	15.6	25	50
	LLPF-17A	LLPF-17S	17	20	T	16.8	21.1	35	50
	LLPF-23A	LLPF-23S	23	25	T	23.4	28.4	45	50
	LLPF-29A	LLPF-29S	29	32	T	29.1	34.5	55	50
	LLPFG-17A	LLPFG-17S	17	20	G	15.8	21.1	40	50
	LLPFG-23A	LLPFG-23S	23	25	G	21.9	28.4	50	50
	LLPFG-29A	LLPFG-29S	29	32	G	27.8	34.5	60	50
	LLPFG-36A	LLPFG-36S	36	40	G	36.1	42.4	75	30
	LLPFG-48A	LLPFG-48S	48	50	G	46.9	54.5	90	30

LLPF Index

min.	max.
Ductility	Good pressure resistance
Fatigue reversed bending	Very good fire safety characteristics
Compression resistance	
Low temperature performance	
Weathering resistance	

For machine building, installation and construction industries
For applications with high fire safety requirements
UL 94 V0

Good pressure resistance
Very good fire safety characteristics

Materials	Temperature range	Colour
Specially modified polyamide 6	-40°C to +105°C	Black/Grey
Certification	Short-term to: +160°C	UV Resistance
Free from halogens, REACH compliant and RoHS compliant	Fire protection	-
	Self-extinguishing	

PMA overbraided conduits

PMA stainless steel overbraiding for conduits

PMA stainless steel overbraiding for conduits

Order no. (black)	Conduit size		for conduit profile	fits to metal connector	braid spec (mm)	d1 Ø (mm)	d2 Ø (mm)	weight net without conduit (kg/100 m)	PU (m)
	NW	Metric							
xxxT-12x/S	12	16	T	MONK-M162	24 x 8 x 0.30	*	17.5	11.9	50
xxxT-17x/S	17	20	T	MONK-M207	32 x 7 x 0.30	*	23.0	13.8	50
xxxG-17x/S	17	20	G	MONK-M207	32 x 7 x 0.30	*	23.0	13.8	50
xxxG-23x/S	23	25	G	MONK-M253	36 x 8 x 0.30	*	31.0	17.8	50
xxxG-29x/S	29	32	G	MONK-M329	36 x 10 x 0.30	*	36.0	22.2	50
xxxG-36x/S	36	40	G	MONK-M406	36 x 12 x 0.30	*	44.5	26.7	30
xxxG-48x/S	48	50	G	MONK-M508	36 x 14 x 0.30	*	58.5	30.7	30



Our customer service or your local distribution partner will be pleased to help you concerning product availability and lead time
 Application: in machine and railway construction; for high mechanical loads; in areas with hot swarf and flying sparks
 Characteristics: increased mechanical conduit protection; extremely high abrasion resistance
 Coverage: > 90%
 Suitable for PMAFLEX, PMA Smart Line; Special metal fittings (MONK)

Materials	Temperature range	Colour
Braid made with stainless steel AISI	-70°C to +1000°C	Metal
Certification	Fire performance	UV Resistance
RoHS compliant	-	-



PMAFIX Pro

Introduction

Next generation cable protection. The extremely successful and technically proven PMAFIX System has been developed further to create the PMAFIX Pro product range.

The new generation fittings are the product of experience gained over many years in the most varied application areas. The PMAFIX Pro has two components, an outer body and an inner sealing element. The sealing element functions both as a seal and as a locking mechanism providing all ingress protection grades up to IP68 and IP69 even in applications where there is long term continuous movement. PMAFIX Pro is manufactured by using multiple component injection moulding process.

Key features

- Meets all ingress protection categories up to and including IP68 and IP69, also when the conduit connection is continually in motion
- Manufactured with newest 2-component injection moulding technology
- Fulfills highest international quality and standard requirements
- Intelligent safety locking mechanism
- Allows simple “push-in” installation of conduits
- Due to the integrated conduit supports, conduit remains centralised with little deformation even when bent sharply directly at the fitting





PMAFIX Pro

General technical details

—
01 patent
—
02 Up to 100 bar

Material

- Fittings made from specially modified polyamide 6
- Threads made from nickel-plated brass or polyamide 6
- Sealings made from cross linked polyester elastomer
- Self-extinguishing
- Free from halogens, REACH + RoHS compliant
- Temperature range: -50°C to +105°C, short-term to +160°C

Characteristics

- Highest assembly reliability – the fitting only locks when the sealing element is fully inserted
- Highest operational safety assured through visual and acoustic correct assembly controls
- Excellent resistance to ultra violet rays and weathering
- Highest impact resistance through fully closed design
- Highest conduit pull out strength
- Vibration-proof connection to PMA conduits
- Fits conduit profiles – fine (T) and coarse (G)
- To avoid accidental opening, disassembling only possible with a screwdriver



—
01




—
02

—
IP68 + IP69


Static + dynamic

- Highest sealing through fully closed system also in highest dynamic applications
- Extra long ribbed sealing areas (cross linked material)
- 360° locking and sealing element shields against high pressure water jets (up to 100 bar)
- Content of delivery: Locking and sealing element and thread seal for male threads (O-Ring and/or flat gasket)




PMAFIX Pro

Part number codes

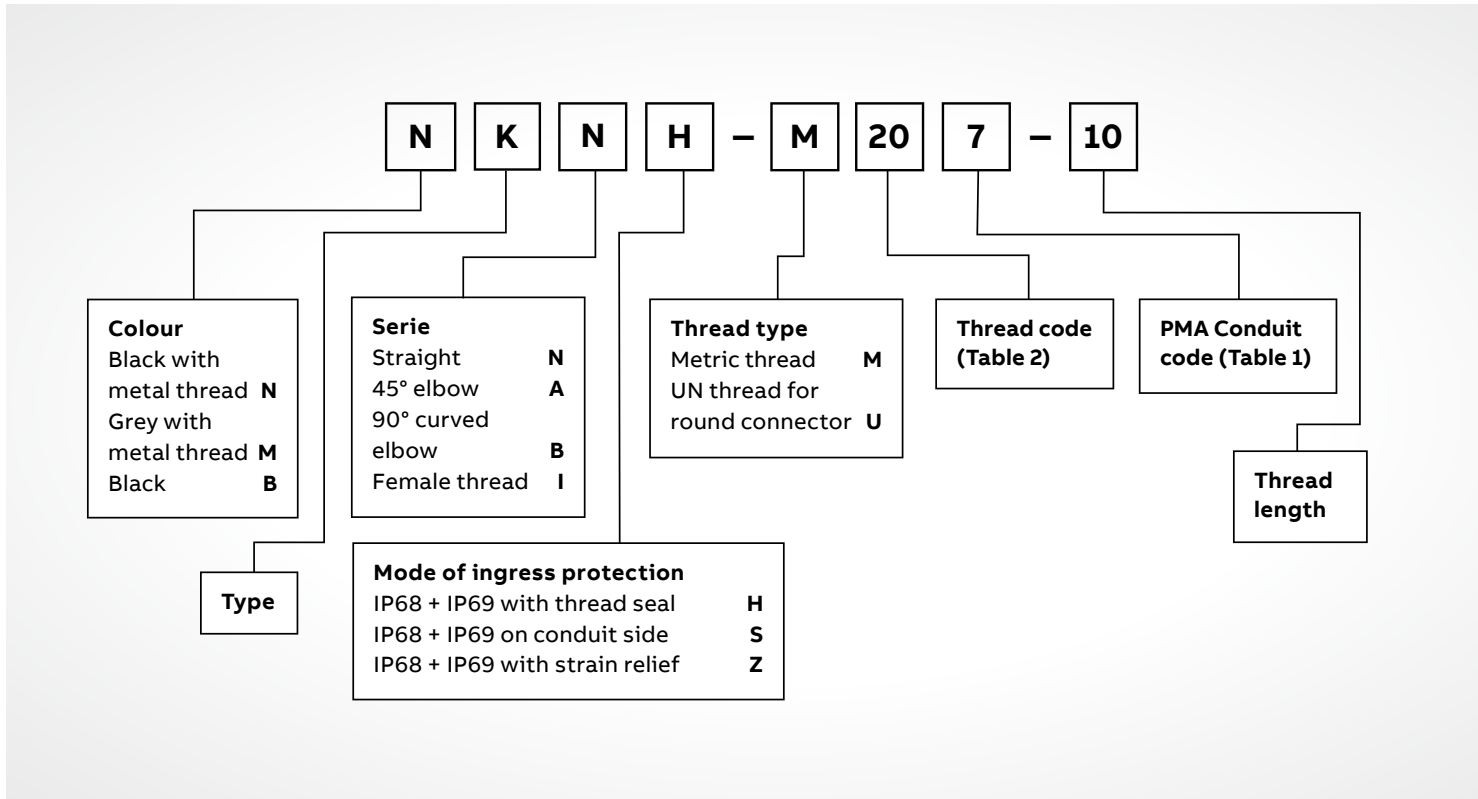

Connector series IP68 + IP69

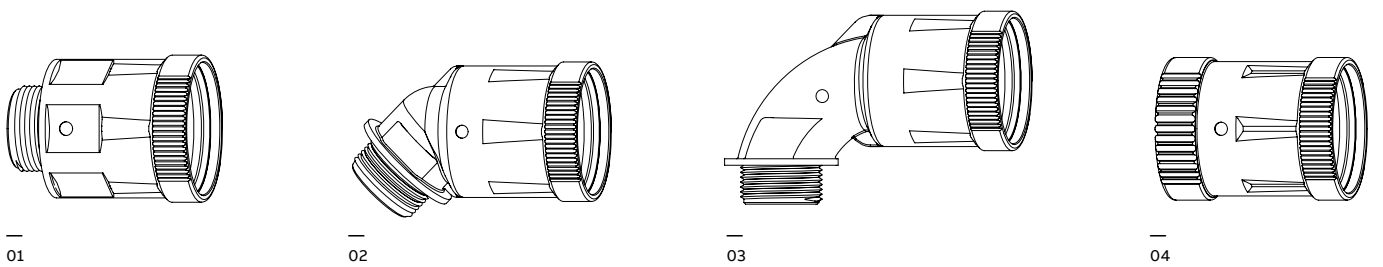

- 01 Straight (N)
- 02 45° elbow (A)
- 03 90° curved elbow (B)
- 04 Female thread (I)

PMAFIX Pro

Size codes, installation

Table 1: Conduit codes

Nominal width	Metric size	PMA code
10	12	0
12	16	2
17	20	7
23	25	3
29	32	9
36	40	6
48	50	8

Table 2: Thread codes


Thread Metric	PMA code
M12x1.5	M12
M16x1.5	M16
M20x1.5	M20
M25x1.5	M25
M32x1.5	M32
M40x1.5	M40
M50x1.5	M50
M63x1.5	M63

Thread UN	PMA code
7/8-20 UNEF	U21
1-20 UNEF	U24
1 3/16-18 UNEF	U29
1 7/16-18 UNEF	U35
1 3/4-18 UNS	U43
2-18 UNS	U50
2 1/4-16 UN	U56

Additional code for female thread connectors


Type	PMA code
With O-ring groove (MIL C 5015)	G

Installation IP68 + IP69

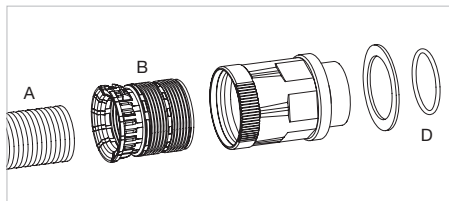


01

A = Corrugated conduit
 B = Sealing and locking element
 C = Fitting body
 D = Thread seal (O-ring or flat gasket*)

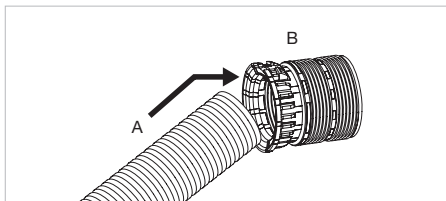


02

Place corrugated conduit (A) at a slight angle against the sealing element (B), then push right into the end.

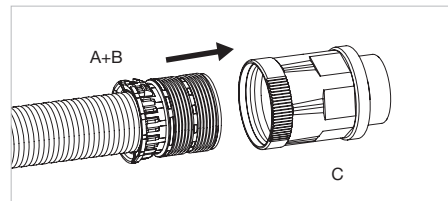


03

Push the conduit and sealing element (A+B) together into the outer body of the fitting (C). Water or a lubricating agent can help facilitate the push-in process.

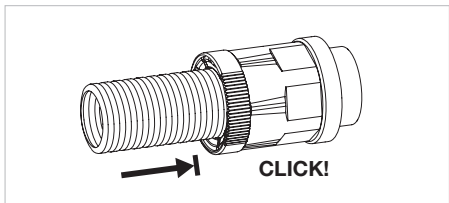


04

The locking mechanism engages when the sealing element is pushed in fully.

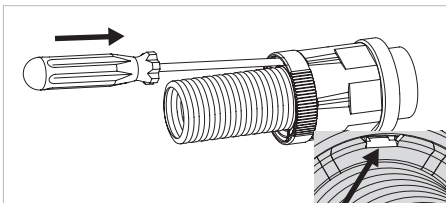

05

To disengage the locking mechanism introduce a size 1 screwdriver parallel to the conduit into the opening shown in the detail drawing.

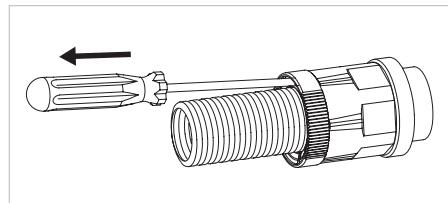


06


Pull the conduit and screwdriver out of the fitting together keeping the screwdriver parallel to the conduit.

PMAFIX Pro

Connectors metric, metal thread

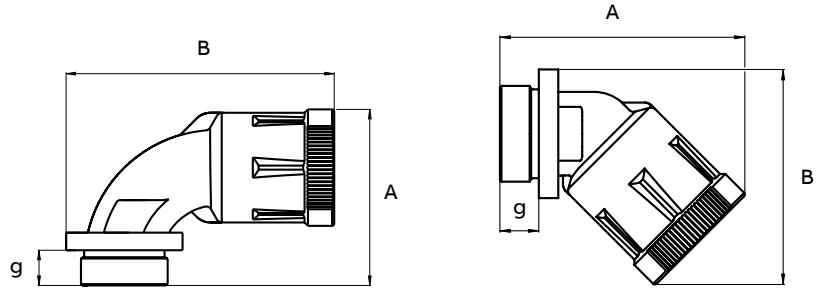


g = Thread length
A x B = External dimensions

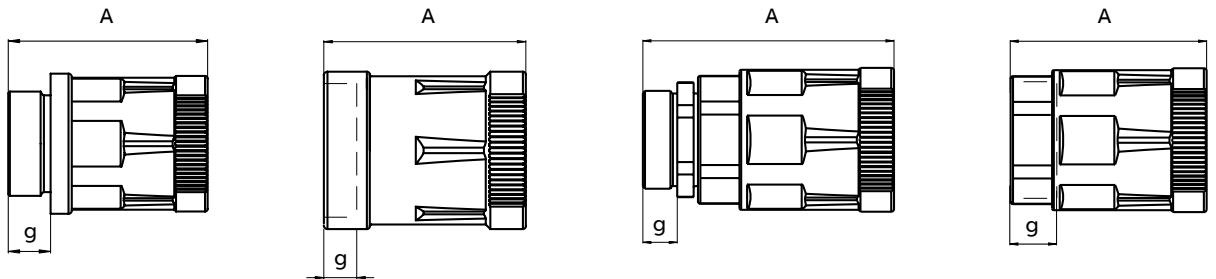

g = Thread length
A = Overall length

Type KNH - Connector straight, metric metal thread

	Order no. black IP68 + IP69	Order no. grey IP68 + IP69	Thread metric	Fits to conduit size		Thread length (mm)	Overall length (mm)
				NW	Metric		
	NKNH-M120-10	MKNH-M120-10	M12 x 1.5	10	12	10.0	45.0
	NKNH-M160-10	MKNH-M160-10	M16 x 1.5	10	12	10.0	45.0
	NKNH-M162-10	MKNH-M162-10	M16 x 1.5	12	16	10.0	50.5
	NKNH-M202-10	MKNH-M202-10	M20 x 1.5	12	16	10.0	50.5
	NKNH-M207-10	MKNH-M207-10	M20 x 1.5	17	20	10.0	56.0
	NKNH-M257-11	MKNH-M257-11	M25 x 1.5	17	20	11.0	57.0
	NKNH-M253-11	MKNH-M253-11	M25 x 1.5	23	25	11.0	59.5
	NKNH-M323-13	MKNH-M323-13	M32 x 1.5	23	25	13.0	61.5
	NKNH-M329-13	MKNH-M329-13	M32 x 1.5	29	32	13.0	67.0
	NKNH-M409-13	MKNH-M409-13	M40 x 1.5	29	32	13.0	68.5
	NKNH-M406-13	MKNH-M406-13	M40 x 1.5	36	40	13.0	74.0
	NKNH-M506-14	MKNH-M506-14	M50 x 1.5	36	40	14.0	75.0
	NKNH-M508-14	MKNH-M508-14	M50 x 1.5	48	50	14.0	81.0
	NKNH-M638-14	MKNH-M638-14	M63 x 1.5	48	50	14.0	81.0

Approvals




For applications in railway vehicles and heavy machine construction
High thread and system connection strength

Connectors metric, metal thread

Type KNZ

Type KNZ - Connector straight with strain relief, metric metal thread



	Order no. IP68 + IP69 Compl., black	Order no. fitting*	Order no. insert	Thread metric	Fits to conduit size		Terminal range (mm)	Thread length (mm)	Overall length (mm)
					NW	Metric			
	NKNZ-M120/P1	NKNZ-M120R/P	EK 150p7	M12 x 1.5	10	12	4.0–6.5	5.0	53.5
	NKNZ-M120/P2		EK 150p8	M12 x 1.5	10	12	5.0–8.0	5.0	53.5
	NKNZ-M120/P3		EK 150p9	M12 x 1.5	10	12	6.5–9.5	5.0	53.5
	NKNZ-M160/P1	NKNZ-M160R/P	E 150p7	M16 x 1.5	10	12	4.0–6.5	6.0	54.5
	NKNZ-M160/P2		E 150p8	M16 x 1.5	10	12	5.0–8.0	6.0	54.5
	NKNZ-M160/P3		E 150p9	M16 x 1.5	10	12	6.5–9.5	6.0	54.5
	NKNZ-M202/P1	NKNZ-M202R/P	E 152p7	M20 x 1.5	12	16	4.0–6.5	6.5	60.5
	NKNZ-M202/P3		E 152p9	M20 x 1.5	12	16	6.5–9.5	6.5	60.5
	NKNZ-M202/P4		E 152p11	M20 x 1.5	12	16	7.0–10.5	6.5	60.5
	NKNZ-M207/P3	NKNZ-M207R/P	E 152p9	M20 x 1.5	17	20	6.5–9.5	6.5	66.5
	NKNZ-M207/P4		E 152p11	M20 x 1.5	17	20	7.0–10.5	6.5	66.5
	NKNZ-M207/P5		E 152p13	M20 x 1.5	17	20	9.0–13.0	6.5	66.5
	NKNZ-M257/P4	NKNZ-M257R/P	E 153p11	M25 x 1.5	17	20	7.0–10.5	7.5	67.5
	NKNZ-M257/P5		E 153p13	M25 x 1.5	17	20	9.0–13.0	7.5	67.5
	NKNZ-M257/P6		E 153p16	M25 x 1.5	17	20	11.5–15.5	7.5	67.5
	NKNZ-M253/P5	NKNZ-M253R/P	EK 154p13	M25 x 1.5	23	25	9.0–13.0	7.5	75.0
	NKNZ-M253/P6	NKNZ-M253R1/P	EK 154p16	M25 x 1.5	23	25	11.5–15.5	7.5	75.0
	NKNZ-M323/P2	NKNZ-M323R/P	E 154p13	M32 x 1.5	23	25	9.0–13.0	8.0	76.0
	NKNZ-M323/P4		E 154p18	M32 x 1.5	23	25	14.0–18.0	8.0	76.0
	NKNZ-M323/P5	NKNZ-M323R1/P	E 154p20	M32 x 1.5	23	25	17.0–20.5	8.0	76.0
	NKNZ-M329/P2	NKNZ-M329R/P	EK 155p18	M32 x 1.5	29	32	14.0–18.0	8.0	83.0
	NKNZ-M329/P3		EK 155p20	M32 x 1.5	29	32	17.0–20.5	8.0	83.0
	NKNZ-M329/P4		EK 155p25	M32 x 1.5	29	32	20.0–25.0	8.0	83.0
	NKNZ-M409/P1	NKNZ-M409R/P	E 155p16	M40 x 1.5	29	32	11.5–15.5	8.0	83.0
	NKNZ-M409/P2		E 155p18	M40 x 1.5	29	32	14.0–18.0	8.0	83.0
	NKNZ-M409/P3		E 155p20	M40 x 1.5	29	32	17.0–20.5	8.0	83.0
	NKNZ-M409/P4		E 155p25	M40 x 1.5	29	32	20.0–25.0	8.0	83.0
	NKNZ-M409/P5		E 155p28	M40 x 1.5	29	32	24.0–28.0	8.0	83.0
NKNZ-M406/P1	NKNZ-M406R/P	E 156p25HF	M40 x 1.5	36	40	20.0–25.0	9.0	87.5	
NKNZ-M406/P2		EK 156p28	M40 x 1.5	36	40	24.0–28.0	9.0	87.5	
NKNZ-M506/P1	NKNZ-M506R/P	E 156p32	M50 x 1.5	36	40	27.0–32.0	10.0	90.0	
NKNZ-M506/P3		E 156p36	M50 x 1.5	36	40	32.0–36.0	10.0	90.0	
NKNZ-M508/P2	NKNZ-M508R/P	E 157p36HF	M50 x 1.5	48	50	32.0–36.0	10.0	100.0	
NKNZ-M508/P3		E 157p40HF	M50 x 1.5	48	50	36.0–40.0	10.0	100.0	
NKNZ-M638/P1	NKNZ-M638R/P	E 158pm1x35	M63 x 1.5	48	50	32.0–35.0	10.0	100.0	
NKNZ-M638/P2		E 158p44	M63 x 1.5	48	50	39.0–44.0	10.0	100.0	

c RA US

Approvals




* without insert
 For applications in railway vehicles and heavy machine construction
 For the separation of damp and dry areas
 Sealing inserts are made from TPE-V
 With integrated strain relief and optimal ingress protection at the cable (up to IP68/10 bar)
 High thread and system connection strength
 Temperature range sealing insert Pflitsch: -40°C to +135°C
Note: For several conductors multiple sealing inserts MDE are available. R/P version of fitting has to be used in combination with multiple sealing inserts

Connectors metric, metal thread

Type KNZ

Type KNZ - Connector straight with strain relief, metric long metal thread



	Order no. IP68 + IP69 Compl., black	Order no. fitting*	Order no. insert	Thread metric	Fits to conduit size		Terminal range (mm)	Thread length (mm)	Overall length (mm)
					NW	Metric			
	NKNZ-M160/P1-L	NKNZ-M160R/P-L	E 150p7	M16 x 1.5	10	16	4.0–6.5	15.0	63.5
	NKNZ-M160/P2-L		E 150p8	M16 x 1.5	10	16	5.0–8.0	15.0	63.5
	NKNZ-M160/P3-L		E 150p9	M16 x 1.5	10	16	6.5–9.5	15.0	63.5
	NKNZ-M202/P1-L	NKNZ-M202R/P-L	E 152p7	M20 x 1.5	12	20	4.0–6.5	15.0	69.0
	NKNZ-M202/P3-L		E 152p9	M20 x 1.5	12	20	6.5–9.5	15.0	69.0
	NKNZ-M202/P4-L		E 152p11	M20 x 1.5	12	20	7.0–10.5	15.0	69.0
	NKNZ-M207/P3-L	NKNZ-M207R/P-L	E 152p9	M20 x 1.5	17	20	6.5–9.5	15.0	75.0
	NKNZ-M207/P4-L		E 152p11	M20 x 1.5	17	20	7.0–10.5	15.0	75.0
	NKNZ-M207/P5-L		E 152p13	M20 x 1.5	17	20	9.0–13.0	15.0	75.0
	NKNZ-M257/P5-L	NKNZ-M257R/P-L	E 153p13	M25 x 1.5	17	25	9.0–13.0	15.0	75.0
	NKNZ-M257/P6-L		E 153p16	M25 x 1.5	17	25	11.5–15.5	15.0	75.0
	NKNZ-M323/P2-L	NKNZ-M323R/P-L	E 154p13	M32 x 1.5	23	32	9.0–13.0	15.0	83.0
	NKNZ-M323/P4-L		E 154p18	M32 x 1.5	23	32	14.0–18.0	15.0	83.0
	NKNZ-M323/P5-L	NKNZ-M323R1/P-L	E 154p20	M32 x 1.5	23	32	17.0–20.5	15.0	83.0
	NKNZ-M329/P2-L	NKNZ-M329R/P-L	EK 155p18	M32 x 1.5	29	32	14.0–18.0	15.0	90.0
	NKNZ-M329/P3-L		EK 155p20	M32 x 1.5	29	40	17.0–20.5	15.0	90.0
	NKNZ-M409/P3-L	NKNZ-M409R/P-L	E 155p20	M40 x 1.5	29	40	17.0–20.5	15.0	90.0
	NKNZ-M409/P4-L		E 155p25	M40 x 1.5	29	40	20.0–25.0	15.0	90.0
	NKNZ-M409/P5-L		E 155p28	M40 x 1.5	29	50	24.0–28.0	15.0	90.0
	NKNZ-M506/P1-L	NKNZ-M506R/P-L	E 156p32	M50 x 1.5	36	50	27.0–32.0	15.0	95.0
NKNZ-M506/P3-L		E 156p36	M50 x 1.5	36	50	32.0–36.0	15.0	95.0	
NKNZ-M508/P2-L	NKNZ-M508R/P-L	E 157p36HF	M50 x 1.5	48	50	32.0–36.0	15.0	105.0	
NKNZ-M508/P3-L		E 157p40HF	M50 x 1.5	48	50	36.0–40.0	15.0	105.0	
NKNZ-M638/P1-L	NKNZ-M638R/P-L	E 158pm1x35	M63 x 1.5	48	63	32.0–35.0	15.0	105.0	
NKNZ-M638/P2-L		E 158p44	M63 x 1.5	48	63	39.0–44.0	15.0	105.0	

c
R
US

Approvals



* without insert

For applications in railway vehicles and heavy machine construction

For the separation of damp and dry areas

Sealing inserts are made from TPE-V

With integrated strain relief and optimal ingress protection at the cable (up to IP68/10 bar)

High thread and system connection strength


Temperature range sealing insert Pflitsch: -40°C to +135°C

Note: For several conductors multiple sealing inserts MDE are available. R/P version of fitting has to be used in combination with multiple sealing inserts

Connectors metric, metal thread

Type KAH & KBH

Type KAH - Connector 45° elbow, metric metal thread


	Order no. black IP68 + IP69	Order no. grey IP68 + IP69	Thread metric	Fits to conduit size		Thread length (mm)	External dimensions (mm)
				NW	Metric		
KAH, patent 	NKAH-M120-10	MKAH-M120-10	M12 x 1.5	10	12	10.0	55.5 x 43.0
	NKAH-M160-10	MKAH-M160-10	M16 x 1.5	10	12	10.0	55.5 x 45.0
	NKAH-M162-10	MKAH-M162-10	M16 x 1.5	12	16	10.0	62.5 x 50.0
	NKAH-M202-10	MKAH-M202-10	M20 x 1.5	12	16	10.0	62.5 x 52.0
	NKAH-M207-10	MKAH-M207-10	M20 x 1.5	17	20	10.0	71.0 x 59.5
	NKAH-M257-11	MKAH-M257-11	M25 x 1.5	17	20	11.0	72.0 x 62.5
	NKAH-M253-11	MKAH-M253-11	M25 x 1.5	23	25	11.0	80.0 x 68.0
	NKAH-M323-13	MKAH-M323-13	M32 x 1.5	23	25	13.0	82.0 x 72.0
	NKAH-M329-13	MKAH-M329-13	M32 x 1.5	29	32	13.0	93.0 x 79.5
	NKAH-M409-13	MKAH-M409-13	M40 x 1.5	29	32	13.0	94.5 x 85.5
	NKAH-M406-13	MKAH-M406-13	M40 x 1.5	36	40	13.0	105.5 x 93.5
	NKAH-M506-14	MKAH-M506-14	M50 x 1.5	36	40	14.0	106.5 x 98.5
	NKAH-M508-14	MKAH-M508-14	M50 x 1.5	48	50	14.0	120.0 x 111.0
	NKAH-M638-14	MKAH-M638-14	M63 x 1.5	48	50	14.0	120.0 x 114.0

Approvals



For applications in railway vehicles and heavy machine construction
High thread and system connection strength

Type KBH - Connector 90° curved elbow, metric metal thread

	Order no. black IP68 + IP69	Order no. grey IP68 + IP69	Thread metric	Fits to conduit size		Thread length (mm)	External dimensions (mm)
				NW	Metric		
KBH, patent 	NKBH-M120-10	MKBH-M120-10	M12 x 1.5	10	12	10.0	44.0 x 62.5
	NKBH-M160-10	MKBH-M160-10	M16 x 1.5	10	12	10.0	44.0 x 64.5
	NKBH-M162-10	MKBH-M162-10	M16 x 1.5	12	16	10.0	47.5 x 72.0
	NKBH-M202-10	MKBH-M202-10	M20 x 1.5	12	16	10.0	47.5 x 74.0
	NKBH-M207-10	MKBH-M207-10	M20 x 1.5	17	20	10.0	53.0 x 81.0
	NKBH-M257-11	MKBH-M257-11	M25 x 1.5	17	20	11.0	54.0 x 84.0
	NKBH-M253-11	MKBH-M253-11	M25 x 1.5	23	25	11.0	63.0 x 92.0
	NKBH-M323-13	MKBH-M323-13	M32 x 1.5	23	25	13.0	65.0 x 96.0
	NKBH-M329-13	MKBH-M329-13	M32 x 1.5	29	32	13.0	75.0 x 108.0
	NKBH-M409-13	MKBH-M409-13	M40 x 1.5	29	32	13.0	76.5 x 114.0
	NKBH-M406-13	MKBH-M406-13	M40 x 1.5	36	40	13.0	87.5 x 126.0
	NKBH-M506-14	MKBH-M506-14	M50 x 1.5	36	40	14.0	88.5 x 131.0
	NKBH-M508-14	MKBH-M508-14	M50 x 1.5	48	50	14.0	101.0 x 145.5
	NKBH-M638-14	MKBH-M638-14	M63 x 1.5	48	50	14.0	101.0 x 148.5

Approvals





For applications in railway vehicles and heavy machine construction
High thread and system connection strength
Smooth elbow allows easy threading of wires and cables

Connectors, female polyamide UNEF thread

Type KIHG

Type KIHG - Connector straight, UN female thread for MIL-C5015


	Order no. black IP68 + IP69	Thread UN	Shell size MIL	Fits to conduit size		Thread length (mm)	Overall length (mm)	
				NW	Metric			
	BKIHG-U212	7/8"-20 UNEF	16	12	16	9.0	47.0	
	BKIHG-U217	7/8"-20 UNEF	16	17	20	9.0	52.5	
	BKIHG-U242	1"-20 UNEF	18	12	16	9.0	47.0	
	BKIHG-U247	1"-20 UNEF	18	17	20	9.0	52.5	
	BKIHG-U243	1"-20 UNEF	18	23	23	9.0	55.5	
	BKIHG-U292	1 3/16"-18 UNEF	20	12	16	9.0	50.5	
	BKIHG-U297	1 3/16"-18 UNEF	20	17	20	9.0	52.5	
	BKIHG-U293	1 3/16"-18 UNEF	20	23	25	9.0	55.5	
	BKIHG-U299	1 3/16"-18 UNEF	20	29	32	9.0	61.0	
	BKIHG-U357	1 7/16"-18 UNEF	24	17	20	9.0	58.0	
	BKIHG-U353	1 7/16"-18 UNEF	24	23	25	9.0	55.5	
	BKIHG-U359	1 7/16"-18 UNEF	24	29	32	9.0	61.0	
	BKIHG-U433	1 3/4"-18 UNS	32	23	25	10.0	62.5	
	BKIHG-U439	1 3/4"-18 UNS	32	29	32	10.0	62.0	
	BKIHG-U503	2"-18 UNS	36	23	25	10.0	67.0	
	BKIHG-U509	2"-18 UNS	36	29	32	10.0	67.5	
	Approvals	BKIHG-U506	2"-18 UNS	36	36	40	10.0	67.0
		BKIHG-U508	2"-18 UNS	36	48	50	10.0	73.5
		BKIHG-U566	2 1/4"-16 UN	40	36	40	10.0	72.0
		BKIHG-U568	2 1/4"-16 UN	40	48	50	10.0	73.5

For applications in railway vehicles and heavy machine construction
Suitable for MIL connector, series C5015

Connectors metric, female metal thread

Type KIS

Type KIS - Connector straight, metric metal female thread

	Order no. black IP68 + IP69	Thread metric	Fits to conduit size		Thread length (mm)	Overall length (mm)
			NW	Metric		
	NKIS-M162	M16 x 1.5	12	16	9.0	49.0
	NKIS-M207	M20 x 1.5	17	20	10.5	56.0
	NKIS-M253	M25 x 1.5	23	25	10.5	58.5
	NKIS-M329	M32 x 1.5	29	32	11.0	65.5
	NKIS-M406	M40 x 1.5	36	40	13.5	72.0
	NKIS-M508	M50 x 1.5	48	50	15.0	83.0
	NKIS-M638	M63 x 1.5	48	50	17.5	84.0

Approvals




For applications in railway vehicles and heavy machine construction
 High thread and system connection strength
 No seal on female thread side

Connectors nylon straight fitting

Type JKNH & JKBH

Type JKNH - Connector two-piece, straight, IP69, metric thread


	Order no. blue	Thread size metric	Fits to conduit size NW	Dimensions						Weight kg/100 pcs	Packing unit/pcs
				g (mm)	Ø ID (mm)	Ø D (mm)	L max. (mm)	sw (mm)			
	JKNH-M162	M16 x 1.5	12	11.0	11.0	28.5	47.5	25	0.8	10	
	JKNH-M202	M20 x 1.5	12	12.5	11.0	28.5	47.5	25	0.9	10	
	JKNH-M207	M20 x 1.5	17	14.5	11.0	35.0	53.5	32	1.4	10	
	JKNH-M257	M25 x 1.5	17	16.5	12.0	35.0	54.5	32	1.5	10	
	JKNH-M253	M25 x 1.5	23	19.0	12.0	42.0	57.0	38	1.7	10	
	JKNH-M323	M32 x 1.5	23	23.0	15.0	43.0	60.5	38	2.0	10	
	JKNH-M329	M32 x 1.5	29	26.0	15.0	51.5	65.5	46	3.2	10	
	JKNH-M409	M40 x 1.5	29	29.0	19.0	51.5	69.5	46	3.7	10	
	JKNH-M406	M40 x 1.5	36	32.0	19.0	65.0	75.0	60	5.9	10	
	JKNH-M506	M50 x 1.5	36	37.5	19.0	65.0	75.0	60	6.2	10	
JKNH-M508	M50 x 1.5	48	42.0	19.0	75.0	81.0	70	7.5	10		
JKNH-M638	M63 x 1.5	48	48.5	19.0	75.0	81.0	70	7.8	10		

Approvals



Very high impact resistance - easy push-in assembly
Corrosion-free
Excellent conduit pull-out strength
IP69 system protection for indoor splash zone areas

Type JKBH - 90° curved elbow, IP69, metric thread

	Order no. blue	Thread size metric	Fits to conduit size NW	Dimensions									Weight kg/100 pcs	Packing unit/pcs
				g (mm)	d1 (mm)	d2 (mm)	d3 (mm)	SW (mm)	A (mm)	B (mm)	R (mm)			
	JKBH-M162	M16 x 1.5	12	11	8.0	28.5	24.0	15.0	44.5	72.0	28.0	1.5	10	
	JKBH-M202	M20 x 1.5	12	11	11.8	28.5	28.0	15.0	44.5	74.0	28.0	1.3	10	
	JKBH-M207	M20 x 1.5	17	11	11.5	35.0	29.0	20.0	50.0	81.0	29.5	2.5	10	
	JKBH-M257	M25 x 1.5	17	12	16.5	35.0	35.0	20.0	51.0	84.0	29.5	2.2	10	
	JKBH-M253	M25 x 1.5	23	12	16.0	43.0	35.0	26.0	59.5	92.0	35.0	3.9	10	
	JKBH-M323	M32 x 1.5	23	15	22.5	43.0	40.0	26.0	63.0	94.5	35.0	3.2	10	
	JKBH-M329	M32 x 1.5	29	15	23.0	51.5	43.0	33.0	73.0	108.0	41.5	6.8	10	
	JKBH-M409	M40 x 1.5	29	19	28.5	51.5	51.0	33.0	77.0	112.0	41.5	6.0	10	
	JKBH-M406	M40 x 1.5	36	19	29.5	60.5	55.0	41.0	87.5	126.0	49.0	11.0	10	
	JKBH-M506	M50 x 1.5	36	19	37.0	60.5	59.0	41.0	87.5	128.0	49.0	9.0	10	
JKBH-M508	M50 x 1.5	48	19	38.5	73.0	69.0	46.0	100.5	145.5	55.5	18.0	10		
JKBH-M638	M63 x 1.5	48	19	48.0	73.0	75.0	55.0	100.5	148.5	55.5	14.0	10		

Approvals



Very high impact resistance - easy push-in assembly
Corrosion-free
Excellent conduit pull-out strength
IP69 system protection for indoor splash zone areas

PMAFIX IP66, IP68 (IP69)

General technical details

PMAFIX connectors. The designation PMAFIX describes a very large range of connectors for PMA conduits with the patented PMA safety clip system.

Connectors are available for degrees of ingress protection IP66 and IP68 according to IEC 60529. IP66 connectors are fitted with a pre-installed universal safety clip which ensures a quick “push-in” installation. IP68 connectors for increased requirements will be delivered with a special conduit seal cap. The new PMAFIX IP68GT fittings combine simplest push-in assembly with highest sealing performance. It is also possible to upgrade to IP69 by retrofitting water impact protection.

Material

- Fittings made from specially formulated polyamide 6
- Threads made from nickel-plated brass or polyamide 6
- Self-extinguishing
- Free from halogens, REACH + RoHS compliant
- Very good chemical properties
- Temperature range: -40°C to +105°C, short-term to +160°C

Characteristics

- Excellent conduit pull-out strength
- High impact resistance
- Vibration-proof connection to PMA corrugated conduits
- Fits conduit profiles – fine (T) and coarse (G)
- To avoid accidental opening, disassembly is only possible with a screwdriver





PMAFIX

General technical details



—
Patent

IP66

IP66 static

IP54 dynamic

- One piece fitting
- Conical sealing method
- Easy “push-in” installation
- Pre-installed safety clip AFN2
- Content of delivery: Connector with pre-installed safety clip




—
Patent

IP68GT

IP68, IP69 static

IP67, IP69 dynamic

- The single piece PMAFIX IP68GT fitting with integrated sealing cap and pre-installed locking clip
- Simple push-in assembly (as with the proven PMAFIX IP66 system)
- The extra long sealing cap guarantees the highest level of ingress protection
- Identical approvals as for the PMAFIX IP68 system component version
- Fast modification of specification drawings through simple addition of “GT” to the existing order number (e.g. BVNV-M257 → BVNV-M257GT)
- Additional water protection ring WPS for IP69 ingress protection in conjunction with the IP68 system to be applied right after the IP68 connector onto the conduit
- Content of delivery: Connector with integrated sealing cap, pre-installed safety clip and thread seal for male thread (O-ring and/or flat gasket)

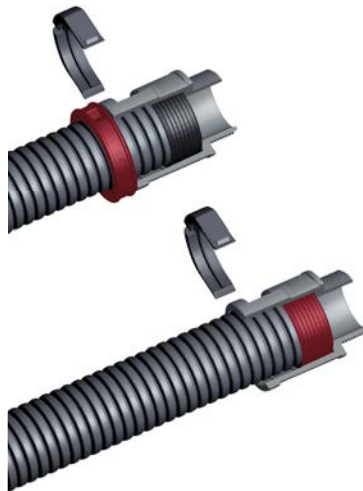

—
Patent

IP68

IP68, IP69 static


IP67, IP69 dynamic

- High sealing through additional seal cap
- For highest dynamic applications
- Additional water protection ring WPS for IP69 ingress protection in conjunction with the IP68 system to be applied right after the IP68 connector onto the conduit
- Content of delivery: Connector with sealing cap, safety clip and thread seal for male thread (O-ring and/or flat gasket)

PMAFIX connectors


Part number codes

For part number explanation only, not to be used as a configuration tool.

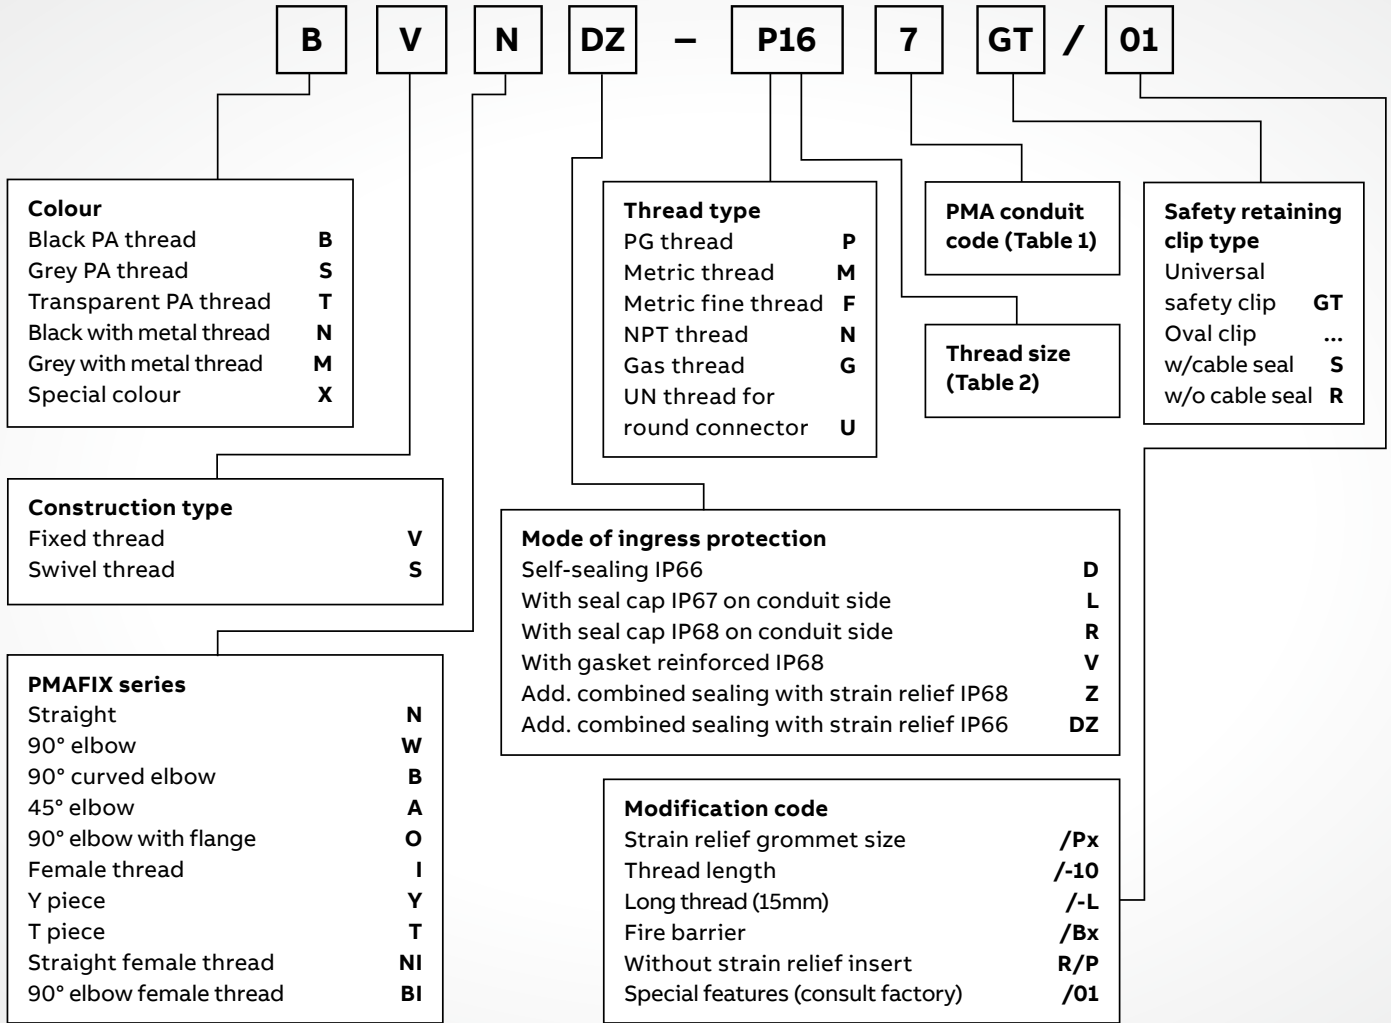

Connector series

- 01 Serie N
- 02 Serie W
- 03 Serie B
- 04 Serie A
- 05 Serie O
- 06 Serie I
- 07 Serie Y
- 08 Serie T

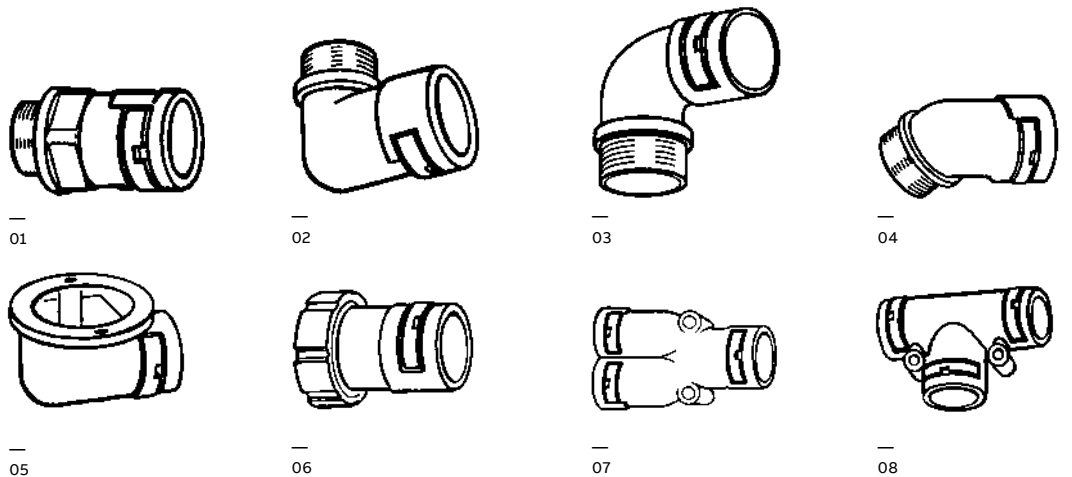

PMAFIX

Size codes

Table 1: Conduit codes

Nominal width	Metric size	PMA code
07	10	M
10	12	0
12	16	2
17	20	7
23	25	3
29	32	9
36	40	6
48	50	8

Additional code for female thread connectors


Type	PMA code
AMP	A
Souriau (ex Burndy) UTG 6	B
With O-ring groove (MIL C 5015)	G
Souriau UTO/UTS	S

Table 2: Thread codes


Thread metric	PMA code	Thread PG	PMA code	Thread Gas	PMA code	Thread NPT	PMA code	Thread UN	PMA code
		PG07	P07	G ¼	G00				
M12 x 1.5	M12	PG09	P09	G ⅜	G01				
M16 x 1.5	M16	PG11	P11	G ½	G02	N ½	N02	½-28 UNEF	U12
M20 x 1.5	M20	PG13.5	P13	G ¾	G04	N ¾	N04	9/16-24 UNEF	U13
		PG16	P16	G 1	G06	N 1	N06	5/8-24 UNEF	U15
M25 x 1.5	M25	PG21	P21	G 1¼	G07	N 1¼	N07	11/16-24 UNEF	U16
M32 x 1.5	M32	PG29	P29	G 1½	G08	N 1½	N08	¾-20 UNEF	U18
M40 x 1.5	M40	PG36	P36	G 2	G09	N 2	N09	13/16-20 UNEF	U20
M50 x 1.5	M50	PG42	P42	G 2¼	G10			7/8-20 UNEF	U21
M63 x 1.5	M63	PG48	P48	G 2½	G11			15/16-20 UNEF	U23
								1-20 UNEF	U24
								1¼-18 UNEF	U26
M 8 x 1.0	F08							3/16-18 UNEF	U29
M12 x 1.0	F12							1/4-18 UNEF	U30
M18 x 1.0	F18							15/16-18 UNEF	U32
								13/8-18 UNEF	U34
								17/16-18 UNEF	U35
								15/8-18 UNEF	U40
								1¾-18 UNS	U43
								2-18 UNS	U50
								2¼-16 UN	U56
								23/8-12 UN	U57
								2½-12 UN	U62

PMAFIX
Installation


Installation IP66

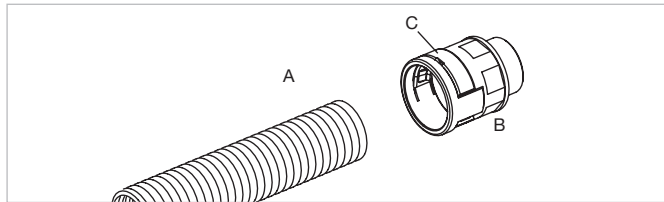

- 01
- A = Conduit
 - B = Fitting
 - C = Universal safety clip

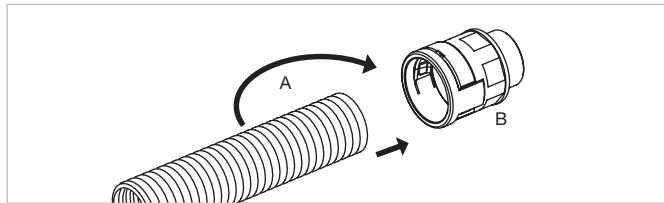


- 02
- Push in the conduit (A) with a slight twist until the stop.

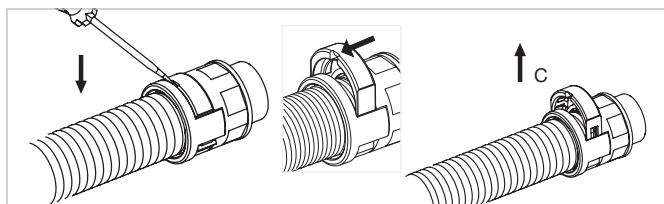


- 03
- To re-open use a screwdriver.
The screwdriver slot in the oval clip (C) should be on the conduit side.

Locking clip pre-installed in all IP66 connectors.


Installation IP68GT

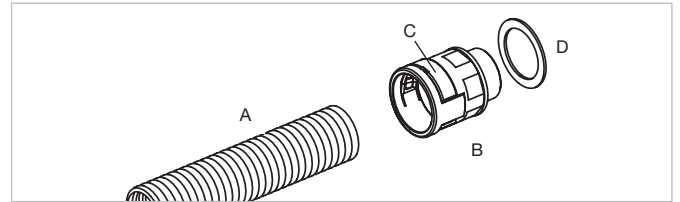

- 01
- A = Conduit
 - B = Fitting with integrated sealing cap
 - C = Universal safety clip
 - D = Thread seal (either O-ring or flat gasket*, not both)

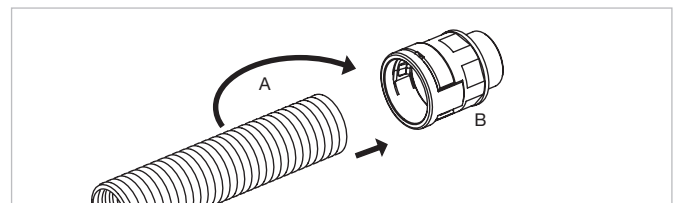

- 02
- Push in the conduit (A) right into the end of the fitting (B) with a slight twist. Additional insertion resistance will be felt when the end of the fitting has been reached.

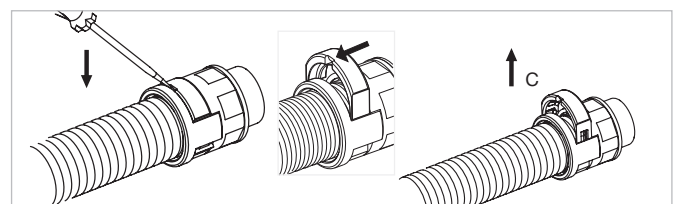


- 03
- To re-open use a screwdriver.
The screwdriver slot in the oval clip (C) should be on the conduit side.

Pre-installed sealing cap and locking clip in all IP68GT connectors.

* Ensure to follow O-ring manufacturers guidelines when using O-rings for sealing purposes.


PMAFIX
Installation

Installation IP68 (IP69)

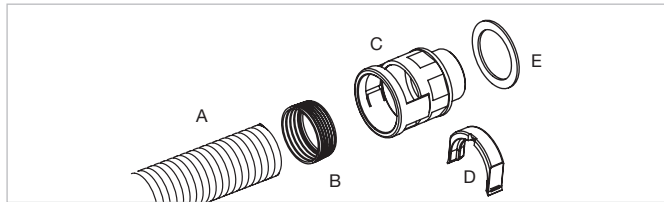


01

- A = Conduit
- B = Sealing cap
- C = Fitting
- D = Oval clip
- E = Thread seal (O-ring or flat seal*)

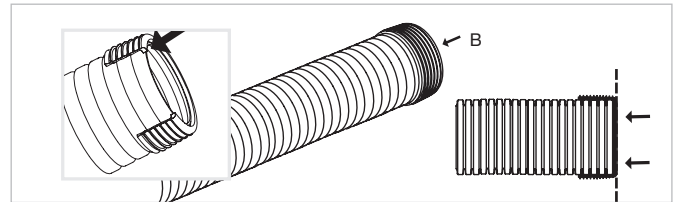


02

Push sealing cap (B) completely onto the conduit in order to achieve IP68.

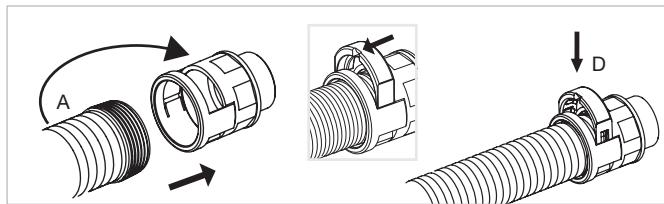


03

Push in the conduit (A) with a slight twist until the stop. Insert oval clip (D) in the locking element window and click into place. Screwdriver slot in the oval clip should be on conduit side.

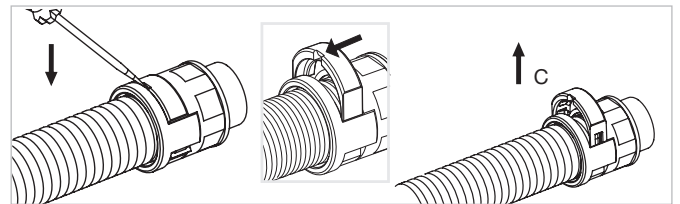


04

To re-open use a screwdriver.

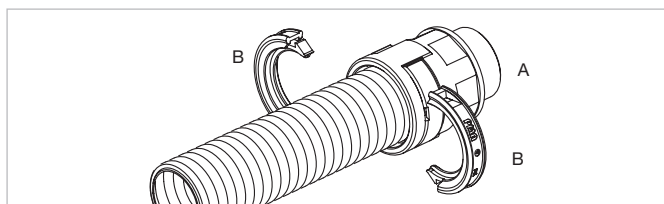

05

- For IP69:
- Based on IP68 System
- A = Conduit with IP68 fitting
- B = WPS half shells

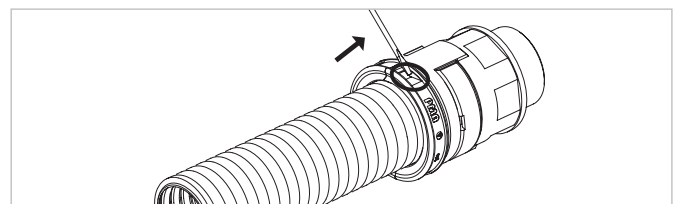


06

To re-open use a screwdriver.

* For safety reasons, oval clip will not fit if seal cap is not fully installed.

Ensure to follow O-ring manufacturers guidelines when using O-rings for sealing purposes.

Fitting dimensions

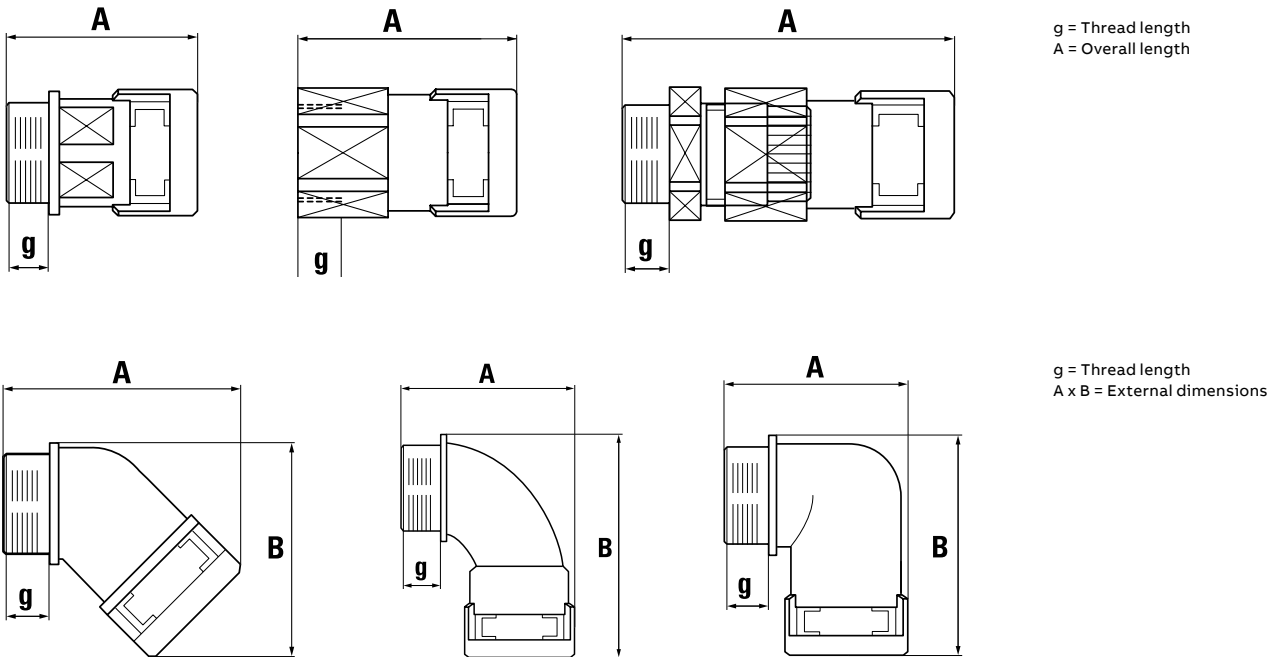

PMAFIX

Connectors metric, polyamide thread

Type VN - Connector straight, metric thread

	Order no. IP66 ①	Order no. IP68* ① ②	Thread metric	Fits to conduit size		Thread length (mm)	Overall length (mm)
				NW	Metric		
	BVND-M12MGT	BVNV-M12M	M12 x 1.5	07	10	11.0	34.5
	BVND-M120GT	BVNV-M120	M12 x 1.5	10	12	11.0	36.5
	BVND-M160GT	BVNV-M160	M16 x 1.5	10	12	11.0	36.5
	BVND-M162GT	BVNV-M162	M16 x 1.5	12	16	11.0	39.5
	BVND-M200GT	BVNV-M200	M20 x 1.5	10	12	11.0	36.5
	BVND-M202GT	BVNV-M202	M20 x 1.5	12	16	11.0	39.5
	BVND-M207GT	BVNV-M207	M20 x 1.5	17	20	11.0	47.5
	BVND-M203GT	BVNV-M203	M20 x 1.5	23	25	11.0	51.0
	BVND-M257GT	BVNV-M257	M25 x 1.5	17	20	12.0	48.5
	BVND-M253GT	BVNV-M253	M25 x 1.5	23	25	12.0	52.0
	BVND-M323GT	BVNV-M323	M32 x 1.5	23	25	15.0	55.5
	BVND-M329GT	BVNV-M329	M32 x 1.5	29	32	15.0	56.0
	BVND-M409GT	BVNV-M409	M40 x 1.5	29	32	19.0	60.0
	BVND-M406GT	BVNV-M406	M40 x 1.5	36	40	19.0	72.5
	BVND-M506GT	BVNV-M506	M50 x 1.5	36	40	19.0	72.0
	BVND-M508GT	BVNV-M508	M50 x 1.5	48	50	19.0	72.5
BVND-M638GT	BVNV-M638	M63 x 1.5	48	50	19.0	72.0	

Approvals




For cable protection systems in a wide range of applications

- ① Please replace "B" for black with "S" for grey in front of the order no.
- ② IP68GT available. Please add "GT" after the order no.

Connectors metric, polyamide thread

Type VNDZ/VNZ & VA

Type VNDZ/VNZ - Connector straight with strain relief, metric thread

	Order no. IP66 ①	Order no. IP68 ① ③	Thread metric	Fits to conduit size		Terminal range	Thread length (mm)	Overall length (mm)
				NW	Metric			
	BVNDZ-M160GT	–	M16 x 1.5	10	12	5.0–10.0	8.0	62.0
	BVNDZ-M162GT	BVNZ-M162S	M16 x 1.5	12	16	5.0–10.0	8.0	62.0
	BVNDZ-M207GT	BVNZ-M207S	M20 x 1.5	17	20	10.0–14.0	8.0	72.0
	BVNDZ-M253GT	BVNZ-M253S	M25 x 1.5	23	25	13.0–18.0	8.0	81.0
	BVNDZ-M329GT	BVNZ-M329S	M32 x 1.5	29	32	18.0–25.0	10.0	85.0
	BVNDZ-M406GT	BVNZ-M406S	M40 x 1.5	36	40	22.0–32.0	10.0	108.5
	BVNDZ-M508GT	BVNZ-M508S	M50 x 1.5	48	50	30.0–38.0	12.0	119.5
	BVNDZ-M638GT	BVNZ-M638S	M63 x 1.5	48	50	34.0–44.0	12.0	119.5

For machine and plant construction


For separation of damp and dry areas

Integrated strain relief optimally holds and seals cables

If several conductors are used with the connector multiple sealing inserts should be considered

Note: For several conductors multiple sealing inserts MDE are available

Type VA - Connector 45° elbow, metric thread

	Order no. IP66 ①	Order no. IP68 ① ②	Thread metric	Fits to conduit size		Thread length (mm)	Overall length (mm)
				NW	Metric		
	BVAD-M120GT	–	M12 x 1.5	10	12	11.0	43.5 x 37.0
	BVAD-M160GT	BVAV-M160	M16 x 1.5	10	12	11.0	43.5 x 38.0
	BVAD-M162GT	BVAV-M162	M16 x 1.5	12	16	11.0	48.0 x 40.0
	BVAD-M202GT	BVAV-M202	M20 x 1.5	12	16	11.0	48.0 x 41.5
	BVAD-M207GT	BVAV-M207	M20 x 1.5	17	20	11.0	55.5 x 51.5
	BVAD-M253GT	BVAV-M253	M25 x 1.5	23	25	12.0	65.0 x 58.5
	BVAD-M329GT	BVAV-M329	M32 x 1.5	29	32	15.0	73.5 x 66.5
	BVAD-M406GT	BVAV-M406	M40 x 1.5	36	40	19.0	92.5 x 85.5
	BVAD-M506GT	BVAV-M506	M50 x 1.5	36	40	19.0	92.5 x 89.5
	BVAD-M508GT	BVAV-M508	M50 x 1.5	48	50	19.0	100.0 x 96.0
	BVAD-M638GT	BVAV-M638	M63 x 1.5	48	50	19.0	100.0 x 104.0

Approvals



① Please replace "B" for black with "S" for grey in front of the order no.


② IP68GT available. Please add "GT" after the order no.

③ IP68GT available. Please replace "S" at the end with "GT" (e.g. BVNZ-M207GT)

Connectors metric, polyamide thread

Type VB & VW

Type VB - Connector 90° curved elbow, metric thread

	Order no. IP66 ①	Order no. IP68 ① ②	Thread metric	Fits to conduit size		Thread length (mm)	External dimensions (mm)
				NW	Metric		
	BVBD-M207GT	BVBV-M207	M20 x 1.5	17	20	11.0	47.5 x 73.0
	BVBD-M257GT	BVBV-M257	M25 x 1.5	17	20	12.0	48.5 x 76.0
	BVBD-M253GT	BVBV-M253	M25 x 1.5	23	25	12.0	57.5 x 83.0
	BVBD-M323GT	BVBV-M323	M32 x 1.5	23	25	15.0	61.0 x 87.5
	BVBD-M329GT	BVBV-M329	M32 x 1.5	29	32	15.0	70.5 x 93.0
	BVBD-M409GT	BVBV-M409	M40 x 1.5	29	32	19.0	74.5 x 98.5
	BVBD-M406GT	BVBV-M406	M40 x 1.5	36	40	19.0	85.0 x 121.0
	BVBD-M506GT	BVBV-M506	M50 x 1.5	36	40	19.0	85.0 x 125.0
	BVBD-M508GT	BVBV-M508	M50 x 1.5	48	50	19.0	98.5 x 130.0
	BVBD-M638GT	BVBV-M638	M63 x 1.5	48	50	19.0	98.5 x 138.0


Approvals



For cable protection systems in a wide range of applications
Smooth elbow allows easy threading of wires and cables

Note: For smaller conduit sizes NW 10 to NW 12 appropriate standard elbows of type VW are also available

Type VW - Connector 90° elbow, metric thread

	Order no. IP66 ①	Order no. IP68 ① ②	Thread metric	Fits to conduit size		Thread length (mm)	External dimensions (mm)
				NW	Metric		
	BVWD-M12MGT	BVWV-M12M	M12 x 1.5	07	10	11.0	32.0 x 35.0
	BVWD-M120GT	BVWV-M120	M12 x 1.5	10	12	11.0	34.0 x 39.5
	BVWD-M160GT	BVWV-M160	M16 x 1.5	10	12	11.0	34.0 x 40.5
	BVWD-M162GT	BVWV-M162	M16 x 1.5	12	16	11.0	38.5 x 46.0
	BVWD-M200GT	–	M20 x 1.5	10	12	11.0	34.0 x 42.5
	BVWD-M202GT	BVWV-M202	M20 x 1.5	12	16	11.0	38.5 x 47.5
	BVWD-M207GT	BVWV-M207	M20 x 1.5	17	20	11.0	43.5 x 58.5
	BVWD-M253GT	BVWV-M253	M25 x 1.5	23	25	12.0	54.0 x 65.0
	BVWD-M329GT	BVWV-M329	M32 x 1.5	29	32	15.0	64.5 x 73.0
	BVWD-M406GT	BVWV-M406	M40 x 1.5	36	40	19.0	78.0 x 96.0
	BVWD-M508GT	BVWV-M508	M50 x 1.5	48	50	19.0	91.5 x 106.0

Approvals



For cable protection systems in a wide range of applications


Note: For sizes NW 17 to NW 48 curved elbows of type VB are also available

- ① Please replace "B" for black with "S" for grey in front of the order no.
- ② IP68GT available. Please add "GT" after the order no.

Connectors metric, metal thread

Type VNV

Type VNV - Connector straight, NPT metal thread

	Order no. IP68, black ⁴	Order no. IP68, grey ⁴	Thread metric	Fits to conduit size		Thread length (mm)	Overall length (mm)
				NW	Metric		
	NVNV-M120-10	MVNV-M120-10	M12 x 1.5	10	12	10.0	40.0
	NVNV-M120-5	MVNV-M120-5	M12 x 1.5	10	12	5.0	35.0
	NVNV-M160-10	MVNV-M160-10	M16 x 1.5	10	12	10.0	40.0
	NVNV-M160-5	MVNV-M160-5	M16 x 1.5	10	12	5.0	35.0
	NVNV-M162-10	MVNV-M162-10	M16 x 1.5	12	16	10.0	43.0
	NVNV-M162-5	MVNV-M162-5	M16 x 1.5	12	16	5.0	38.0
	NVNV-M202-10	MVNV-M202-10	M20 x 1.5	12	16	10.0	43.0
	NVNV-M202-6	MVNV-M202-6	M20 x 1.5	12	16	6.0	39.0
	NVNV-M207-10	MVNV-M207-10	M20 x 1.5	17	20	10.0	51.0
	NVNV-M207-6	MVNV-M207-6	M20 x 1.5	17	20	6.0	47.0
	NVNV-M257-11	MVNV-M257-11	M25 x 1.5	17	20	11.0	52.0
	NVNV-M257-7	MVNV-M257-7	M25 x 1.5	17	20	7.0	48.0
	NVNV-M253-11	MVNV-M253-11	M25 x 1.5	23	25	11.0	54.0
	NVNV-M253-7	MVNV-M253-7	M25 x 1.5	23	25	7.0	50.0
	NVNV-M323-13	MVNV-M323-13	M32 x 1.5	23	25	13.0	56.0
	NVNV-M323-8	MVNV-M323-8	M32 x 1.5	23	25	8.0	51.0
	NVNV-M329-13	MVNV-M329-13	M32 x 1.5	29	32	13.0	57.3
	NVNV-M329-8	MVNV-M329-8	M32 x 1.5	29	32	8.0	52.3
	NVNV-M409-13	MVNV-M409-13	M40 x 1.5	29	32	13.0	57.3
	NVNV-M409-8	MVNV-M409-8	M40 x 1.5	29	32	8.0	52.3
	NVNV-M406-13	MVNV-M406-13	M40 x 1.5	36	40	13.0	71.4
	NVNV-M406-8	MVNV-M406-8	M40 x 1.5	36	40	8.0	66.4
	NVNV-M506-14	MVNV-M506-14	M50 x 1.5	36	40	14.0	72.4
	NVNV-M506-9	MVNV-M506-9	M50 x 1.5	36	40	9.0	67.4
	NVNV-M508-14	MVNV-M508-14	M50 x 1.5	48	50	14.0	72.4
	NVNV-M508-9	MVNV-M508-9	M50 x 1.5	48	50	9.0	67.4
	NVNV-M638-14	MVNV-M638-14	M63 x 1.5	48	50	14.0	72.4
	NVNV-M638-10	MVNV-M638-10	M63 x 1.5	48	50	10.0	68.4

Approvals




For applications in railway vehicles and heavy machine construction
High thread and system connection strength

⁴ IP68GT available. Please add
“GT” prior to the thread length
(for example NVNV-M120GT-10)

Connectors NPT, metal thread

Type VNV

Type VNV - Connector straight, metric metal thread

	Order no. IP68, black ⁴	Thread NPT	Fits to conduit size		Thread length (mm)	Overall length (mm)
			NW	Metric		
	NVNV-N022	½"	12	16	15.4	48.1
	NVNV-N027	½"	17	20	15.4	56.4
	NVNV-N043	¾"	23	25	15.7	58.7
	NVNV-N069	1"	29	32	19.6	63.9
	NVNV-N076	1¼"	36	40	20.2	78.6
	NVNV-N088	1½"	48	50	20.6	79.0
	NVNV-N098	2"	48	50	21.4	79.8

Approvals



For applications in railway vehicles and heavy machine construction
High thread and system connection strength

⁴ IP68GT available. Please add
"GT" prior to the thread length
(for example NVNV-N022GT)

Connectors with strain relief, metric, metal thread

Type VNZ

Type VNZ - Connector straight with strain relief, metric metal thread



	Order no. IP68 Compl., black ⑤	Order no. fitting* ⑤	Order no. insert	Thread metric	Fits to conduit size		Terminal range (mm)	Thread length (mm)	Overall length (mm)
					NW	Metric			
	NVNZ-M120S/P1	NVNZ-M120R/P	EK 150p7	M12 x 1.5	10	12	4.0–6.5	5.0	48.5
	NVNZ-M120S/P2		EK 150p8	M12 x 1.5	10	12	5.0–8.0	5.0	48.5
	NVNZ-M120S/P3		EK 150p9	M12 x 1.5	10	12	6.5–9.5	5.0	48.5
	NVNZ-M160S/P1	NVNZ-M160R/P	E 150p7	M16 x 1.5	10	12	4.0–6.5	6.0	49.5
	NVNZ-M160S/P2		E 150p8	M16 x 1.5	10	12	5.0–8.0	6.0	49.5
	NVNZ-M160S/P3		E 150p9	M16 x 1.5	10	12	6.5–9.5	6.0	49.5
	NVNZ-M202S/P1	NVNZ-M202R/P	E 152p7	M20 x 1.5	12	16	4.0–6.5	6.0	54.0
	NVNZ-M202S/P3		E 152p9	M20 x 1.5	12	16	6.5–9.5	6.0	54.0
	NVNZ-M202S/P4		E 152p11	M20 x 1.5	12	16	7.0–10.5	6.0	54.0
	NVNZ-M207S/P3	NVNZ-M207R/P	E 152p9	M20 x 1.5	17	20	6.5–9.5	6.5	60.0
	NVNZ-M207S/P4		E 152p11	M20 x 1.5	17	20	7.0–10.5	6.5	60.0
	NVNZ-M207S/P5		E 152p13	M20 x 1.5	17	20	9.0–13.0	6.5	60.0
	NVNZ-M253S/P5	NVNZ-M253R/P	EK 154p13	M25 x 1.5	23	25	9.0–13.0	7.5	72.5
	NVNZ-M253S/P6		EK 154p16	M25 x 1.5	23	25	11.5–15.5	7.5	72.5
	NVNZ-M257S/P4	NVNZ-M257R/P	E 153p11	M25 x 1.5	17	20	7.0–10.5	7.5	61.5
	NVNZ-M257S/P5		E 153p13	M25 x 1.5	17	20	9.0–13.0	7.5	61.5
	NVNZ-M257S/P6		E 153p16	M25 x 1.5	17	20	11.5–15.5	7.5	61.5
	NVNZ-M323S/P4	NVNZ-M323R/P	E 154p18	M32 x 1.5	23	25	14.0–18.0	8.0	73.0
	NVNZ-M323S/P5	NVNZ-M323R1/P	E 154p20	M32 x 1.5	23	25	17.0–20.5	8.0	73.0
	NVNZ-M329S/P2	NVNZ-M329R/P	EK 155p18	M32 x 1.5	29	32	14.0–18.0	8.0	73.0
	NVNZ-M329S/P3		EK 155p20	M32 x 1.5	29	32	17.0–20.5	8.0	73.0
	NVNZ-M329S/P4		EK 155p25	M32 x 1.5	29	32	20.0–25.0	8.0	73.0
	NVNZ-M406S/P1	NVNZ-M406R/P	E 156p25HF	M40 x 1.5	36	40	20.0–25.0	9.0	87.0
	NVNZ-M406S/P2		EK 156p28	M40 x 1.5	36	40	24.0–28.0	9.0	87.0
	NVNZ-M409S/P1	NVNZ-M409R/P	E 155p16	M40 x 1.5	29	32	11.5–15.5	8.0	73.0
	NVNZ-M409S/P2		E 155p18	M40 x 1.5	29	32	14.0–18.0	8.0	73.0
	NVNZ-M409S/P3		E 155p20	M40 x 1.5	29	32	17.0–20.5	8.0	73.0
	NVNZ-M409S/P4		E 155p25	M40 x 1.5	29	32	20.0–25.0	8.0	73.0
	NVNZ-M409S/P5		E 155p28	M40 x 1.5	29	32	24.0–28.0	8.0	73.0
	NVNZ-M506S/P1	NVNZ-M506R/P	E 156p32	M50 x 1.5	36	40	27.0–32.0	9.0	89.5
NVNZ-M506S/P3		E 156p36	M50 x 1.5	36	40	32.0–36.0	9.0	89.5	
NVNZ-M508S/P2	NVNZ-M508R/P	E 157p36HF	M50 x 1.5	48	50	32.0–36.0	9.0	92.0	
NVNZ-M508S/P3		E 157p40HF	M50 x 1.5	48	50	36.0–40.0	9.0	92.0	
NVNZ-M638S/P1	NVNZ-M638R/P	E 158pm1x35	M63 x 1.5	48	50	32.0–35.0	10.0	90.5	
NVNZ-M638S/P2		E 158p44	M63 x 1.5	48	50	39.0–44.0	10.0	90.5	

*without insert

For applications in railway vehicles and heavy machine construction

For the separation of damp and dry areas

Sealing inserts are made from TPE-V

With integrated strain relief and optimal ingress protection at the cable (up to IP68/10 bar)

High thread and system connection strength

Temperature range sealing insert Pflitsch: -40°C to +135°C

Note: For several conductors multiple sealing inserts MDE are available. R/P version of fitting has to be used in combination with multiple sealing inserts

⑤ IP68GT available. Please replace "S" or "R" with "GT" (e.g. NVNZ-M120GT/P1, NVNZ-M120GT/P)

Fire barrier connectors with strain relief, metric, metal thread

Type VNZ

Type VNZ - Fire barrier connector straight with strain relief, metric metal thread



	Order no. IP68 Compl., black ⁵	Thread metric	Fits to conduit size		Terminal range (mm)	Thread length (mm)	Overall length (mm)
			NW	Metric			
	NVNZ-M120S/B1	M12 x 1.5	10	12	4.0–6.5	5.0	48.5
	NVNZ-M120S/B2	M12 x 1.5	10	12	5.0–8.0	5.0	48.5
	NVNZ-M120S/B3	M12 x 1.5	10	12	6.5–9.5	5.0	48.5
	NVNZ-M160S/B1	M16 x 1.5	10	12	4.0–6.5	6.0	49.5
	NVNZ-M160S/B2	M16 x 1.5	10	12	5.0–8.0	6.0	49.5
	NVNZ-M160S/B3	M16 x 1.5	10	12	6.5–9.5	6.0	49.5
	NVNZ-M202S/B1	M20 x 1.5	12	16	4.0–6.5	6.0	54.0
	NVNZ-M202S/B3	M20 x 1.5	12	16	6.5–9.5	6.0	54.0
	NVNZ-M202S/B4	M20 x 1.5	12	16	7.0–10.5	6.0	54.0
	NVNZ-M207S/B1	M20 x 1.5	17	20	4.0–6.5	6.5	60.0
	NVNZ-M207S/B2	M20 x 1.5	17	20	5.0–8.0	6.5	60.0
	NVNZ-M207S/B3	M20 x 1.5	17	20	6.5–9.5	6.5	60.0
	NVNZ-M207S/B4	M20 x 1.5	17	20	7.0–10.5	6.5	60.0
	NVNZ-M207S/B5	M20 x 1.5	17	20	9.0–13.0	6.5	60.0
	NVNZ-M253S/B5	M25 x 1.5	23	25	9.0–13.0	7.5	72.5
	NVNZ-M253S/B6	M25 x 1.5	23	25	11.5–15.5	7.5	72.5
	NVNZ-M257S/B4	M25 x 1.5	17	20	7.0–10.0	7.5	61.5
	NVNZ-M257S/B5	M25 x 1.5	17	20	9.0–13.0	7.5	61.5
	NVNZ-M257S/B6	M25 x 1.5	17	20	11.5–15.5	7.5	61.5
	NVNZ-M323S/B4	M32 x 1.5	23	25	14.0–18.0	8.0	73.0
	NVNZ-M323S/B5	M32 x 1.5	23	25	17.0–20.5	8.0	73.0
	NVNZ-M329S/B2	M32 x 1.5	29	32	14.0–18.0	8.0	73.0
	NVNZ-M329S/B3	M32 x 1.5	29	32	17.0–20.5	8.0	73.0
	NVNZ-M329S/B4	M32 x 1.5	29	32	20.0–25.0	8.0	73.0
	NVNZ-M406S/B1	M40 x 1.5	36	40	20.0–25.0	9.0	87.0
	NVNZ-M406S/B2	M40 x 1.5	36	40	24.0–28.0	9.0	87.0
	NVNZ-M409S/B1	M40 x 1.5	29	32	11.5–15.5	8.0	73.0
	NVNZ-M409S/B2	M40 x 1.5	29	32	14.0–18.0	8.0	73.0
	NVNZ-M409S/B3	M40 x 1.5	29	32	17.0–20.5	8.0	73.0
	NVNZ-M409S/B4	M40 x 1.5	29	32	20.0–25.0	8.0	73.0
	NVNZ-M409S/B5	M40 x 1.5	29	32	24.0–28.0	8.0	73.0
	NVNZ-M506S/B1	M50 x 1.5	36	40	27.0–32.0	9.0	89.5
	NVNZ-M506S/B3	M50 x 1.5	36	40	32.0–36.0	9.0	89.5
NVNZ-M508S/B2	M50 x 1.5	48	50	32.0–36.0	9.0	92.0	
NVNZ-M508S/B3	M50 x 1.5	48	50	36.0–40.0	9.0	92.0	
NVNZ-M638S/B1	M63 x 1.5	48	50	32.0–35.0	10.0	90.5	
NVNZ-M638S/B2	M63 x 1.5	48	50	39.0–44.0	10.0	90.5	

*without insert

Fire barrier function, according to standard EN45545-2/-3

For applications in railway vehicles and heavy machine construction

For the separation of damp and dry areas

Sealing inserts are made from T80S

With integrated strain relief and optimal ingress protection at the cable (up to IP68/10 bar)

High thread and system connection strength

Temperature range sealing insert Pflitsch: -40°C to +135°C

Note: For several conductors multiple sealing inserts MDE are available.

R/P version of fitting has to be used in combination with multiple sealing inserts


⁵ IP68GT available. Please
replace "S" or "R" with "GT"
(e.g. NVNZ-M120GT/P1,
NVNZ-M120GT/P)

Connectors with strain relief, metric, long metal thread

Type VNZ

Type VNZ - Connector straight with strain relief, metric long metal thread



VNZ	Order no. IP68 Compl., black ⑤	Order no. fitting* ⑤	Order no. insert	Thread metric	Fits to conduit size		Terminal range (mm)	Thread length (mm)	Overall length (mm)
					NW	Metric			
	NVNZ-M120S/P1-L	NVNZ-M120R/P-L	EK 150p7	M12 x 1.5	10	12	4.0–6.5	15.0	66.5
	NVNZ-M120S/P3-L			M12 x 1.5	10	12	6.5–9.5	15.0	66.5
	NVNZ-M160S/P1-L	NVNZ-M160R/P-L	E 150p7	M16 x 1.5	10	12	4.0–6.5	15.0	58.5
	NVNZ-M160S/P2-L		E 150p8	M16 x 1.5	10	12	5.0–8.0	15.0	58.5
	NVNZ-M160S/P3-L		E 150p9	M16 x 1.5	10	12	6.5–9.5	15.0	58.5
	NVNZ-M202S/P1-L	NVNZ-M202R/P-L	E 152p7	M20 x 1.5	12	16	4.0–6.5	15.0	62.5
	NVNZ-M202S/P3-L		E 152p9	M20 x 1.5	12	16	6.5–9.5	15.0	62.5
	NVNZ-M202S/P4-L		E 152p11	M20 x 1.5	12	16	7.0–10.5	15.0	62.5
	NVNZ-M207S/P3-L	NVNZ-M207R/P-L	E 152p9	M20 x 1.5	17	20	6.5–9.5	15.0	68.5
	NVNZ-M207S/P4-L		E 152p11	M20 x 1.5	17	20	7.0–10.5	15.0	68.5
	NVNZ-M207S/P5-L		E 152p13	M20 x 1.5	17	20	9.0–13.0	15.0	68.5
	NVNZ-M257S/P5-L	NVNZ-M257R/P-L	E 153p13	M25 x 1.5	17	20	9.0–13.0	15.0	69.0
	NVNZ-M257S/P6-L		E 153p16	M25 x 1.5	17	20	11.5–15.5	15.0	69.0
	NVNZ-M323S/P4-L	NVNZ-M323R/P-L	E 154p18	M32 x 1.5	23	25	14.0–18.0	15.0	80.0
	NVNZ-M323S/P5-L	NVNZ-M323R1/P-L	E 154p20	M32 x 1.5	23	25	17.0–20.5	15.0	80.0
	NVNZ-M329S/P2-L	NVNZ-M329R/P-L	E 155p18	M32 x 1.5	29	32	14.0–18.0	15.0	91.0
	NVNZ-M329S/P3-L		E 155p20	M32 x 1.5	29	32	17.0–20.5	15.0	91.0
	NVNZ-M409S/P3-L	NVNZ-M409R/P-L	E 155p20	M40 x 1.5	29	32	17.0–20.5	15.0	80.0
	NVNZ-M409S/P4-L		E 155p25	M40 x 1.5	29	32	20.0–25.0	15.0	80.0
	NVNZ-M409S/P5-L		E 155p28	M40 x 1.5	29	32	24.0–28.0	15.0	80.0
	NVNZ-M506S/P1-L	NVNZ-M506R/P-L	E 156p32	M50 x 1.5	36	40	27.0–32.0	15.0	94.5
	NVNZ-M506S/P3-L		E 156p36	M50 x 1.5	36	40	32.0–36.0	15.0	94.5
	NVNZ-M508S/P2-L	NVNZ-M508R/P-L	E 157p36HF	M50 x 1.5	48	50	32.0–36.0	15.0	97.0
	NVNZ-M508S/P3-L		E 157p40HF	M50 x 1.5	48	50	36.0–40.0	15.0	97.0
	NVNZ-M638S/P1-L	NVNZ-M638R/P-L	E 158pm1X35	M63 x 1.5	48	50	32.0–35.0	15.0	95.5
	NVNZ-M638S/P2-L		E 158p44	M63 x 1.5	48	50	39.0–44.0	15.0	95.5

*without insert

For applications in railway vehicles and heavy machine construction

For the separation of damp and dry areas

Sealing inserts are made from TPE-V

With integrated strain relief and optimal ingress protection at the cable (up to IP68/10 bar)

High thread and system connection strength

Temperature range sealing insert Pflitsch: -40°C to +135°C

Note: For several conductors multiple sealing inserts MDE are available


R/P version of fitting has to be used in combination with multiple sealing inserts

⑤ IP68GT available. Please
replace "S" or "R" with "GT"
(e.g. NVNZ-M120GT/P1-L)

Connectors metric, metal thread

Type VAV

Type VAV - Connector 45° elbow, metric metal thread

	Order no. IP68, black ⁴	Order no. IP68, grey ⁴	Thread metric	Fits to conduit size		Thread length (mm)	External dimensions (mm)
				NW	Metric		
	NVAV-M120-10	MVAV-M120-10	M12 x 1.5	10	12	10.0	48.5 x 37.0
	NVAV-M120-5	MVAV-M120-5	M12 x 1.5	10	12	5.0	43.5 x 37.0
	NVAV-M162-10	MVAV-M162-10	M16 x 1.5	12	16	10.0	53.0 x 40.5
	NVAV-M162-5	MVAV-M162-5	M16 x 1.5	12	16	5.0	48.0 x 40.5
	NVAV-M207-10	MVAV-M207-10	M20 x 1.5	17	20	10.0	60.5 x 51.5
	NVAV-M207-6	MVAV-M207-6	M20 x 1.5	17	20	6.0	56.5 x 51.5
	NVAV-M253-11	MVAV-M253-11	M25 x 1.5	23	25	11.0	70.0 x 60.5
	NVAV-M253-7	MVAV-M253-7	M25 x 1.5	23	25	7.0	66.0 x 60.5
	NVAV-M329-13	MVAV-M329-13	M32 x 1.5	29	32	13.0	77.0 x 68.0
	NVAV-M329-8	MVAV-M329-8	M32 x 1.5	29	32	8.0	72.0 x 68.0
	NVAV-M406-13	MVAV-M406-13	M40 x 1.5	36	40	13.0	94.0 x 87.5
	NVAV-M406-8	MVAV-M406-8	M40 x 1.5	36	40	8.0	89.0 x 87.5
	NVAV-M508-14	MVAV-M508-14	M50 x 1.5	48	50	14.0	102.0 x 101.0
	NVAV-M508-9	MVAV-M508-9	M50 x 1.5	48	50	9.0	97.0 x 101.0
	NVAV-M638-14	MVAV-M638-14	M63 x 1.5	48	50	14.0	102.0 x 104.0
	NVAV-M638-10	MVAV-M638-10	M63 x 1.5	48	50	10.0	98.0 x 104.0

Approvals



For applications in railway vehicles and heavy machine construction
High thread and system connection strength

⁴ IP68GT available. Please add "GT" prior to the thread length (e.g. NVAV-M120GT-10, NVBV-M120GT-10)



PMA® CABLE PROTECTION


PMA provides information and guidance on application specific challenges, and develops products to meet the needs of the industry.



Connectors metric, metal thread

Type VBV

Type VBV - Connector 90° curved elbow, metric metal thread

	Order no. IP68, black ^④	Order no. IP68, grey ^④	Thread metric	Fits to conduit size		Thread length (mm)	External dimensions (mm)
				NW	Metric		
	NVBV-M207-10	MVBV-M207-10	M20 x 1.5	17	20	10.0	51.0 x 73.0
	NVBV-M207-6	MVBV-M207-6	M20 x 1.5	17	20	6.0	47.0 x 73.0
	NVBV-M257-11	MVBV-M257-11	M25 x 1.5	17	20	11.0	52.0 x 76.0
	NVBV-M257-7	MVBV-M257-7	M25 x 1.5	17	20	7.0	48.0 x 76.0
	NVBV-M253-11	MVBV-M253-11	M25 x 1.5	23	25	11.0	62.5 x 85.0
	NVBV-M253-7	MVBV-M253-7	M25 x 1.5	23	25	7.0	58.5 x 85.0
	NVBV-M323-13	MVBV-M323-13	M32 x 1.5	23	25	13.0	64.5 x 89.0
	NVBV-M323-8	MVBV-M323-8	M32 x 1.5	23	25	8.0	59.5 x 89.0
	NVBV-M329-13	MVBV-M329-13	M32 x 1.5	29	32	13.0	74.0 x 94.5
	NVBV-M329-8	MVBV-M329-8	M32 x 1.5	29	32	8.0	69.0 x 94.5
	NVBV-M409-13	MVBV-M409-13	M40 x 1.5	29	32	13.0	75.5 x 100.5
	NVBV-M409-8	MVBV-M409-8	M40 x 1.5	29	32	8.0	70.5 x 100.5
	NVBV-M406-13	MVBV-M406-13	M40 x 1.5	36	40	13.0	86.5 x 123.0
	NVBV-M406-8	MVBV-M406-8	M40 x 1.5	36	40	8.0	81.5 x 123.0
	NVBV-M506-14	MVBV-M506-14	M50 x 1.5	36	40	14.0	87.5 x 130.0
	NVBV-M506-9	MVBV-M506-9	M50 x 1.5	36	40	9.0	82.5 x 130.0
	NVBV-M508-14	MVBV-M508-14	M50 x 1.5	48	50	14.0	100.5 x 135.0
	NVBV-M508-9	MVBV-M508-9	M50 x 1.5	48	50	9.0	95.5 x 135.0
	NVBV-M638-10	MVBV-M638-10	M63 x 1.5	48	50	14.0	100.5 x 138.0
	NVBV-M638-14	MVBV-M638-14	M63 x 1.5	48	50	10.0	96.5 x 138.0

Approvals



For applications in railway vehicles and heavy machine construction

High thread and system connection strength

Smooth elbow allows easy threading of wires and cables


Note: Appropriate standard elbows of type VW are available for smaller conduit sizes NW 10 to NW 12

^⑤ IP68GT available. Please add "GT" prior to the thread length (e.g. NVAV-M120GT-10, NVBV-M120GT-10)

Connectors metric, metal thread

Type VWV

Type VWV - Connector 90° elbow, metric metal thread

	Order no. IP68, black ⁴	Order no. IP68, grey ⁴	Thread metric	Fits to conduit size		Thread length (mm)	External dimensions (mm)
				NW	Metric		
	NVWV-M120-10	MVWV-M120-10	M12 x 1.5	10	12	10.0	37.5 x 39.5
	NVWV-M120-5	MVWV-M120-5	M12 x 1.5	10	12	5.0	32.5 x 39.5
	NVWV-M160-10	MVWV-M160-10	M16 x 1.5	10	12	10.0	37.5 x 41.5
	NVWV-M160-5	MVWV-M160-5	M16 x 1.5	10	12	5.0	32.5 x 41.5
	NVWV-M162-10	MVWV-M162-10	M16 x 1.5	12	16	10.0	42.0 x 46.5
	NVWV-M162-5	MVWV-M162-5	M16 x 1.5	12	16	5.0	37.0 x 46.5
	NVWV-M202-10	MVWV-M202-10	M20 x 1.5	12	16	10.0	42.0 x 49.0
	NVWV-M202-6	MVWV-M202-6	M20 x 1.5	12	16	6.0	38.0 x 49.0
	NVWV-M207-10	MVWV-M207-10	M20 x 1.5	17	20	10.0	47.0 x 58.5
	NVWV-M207-6	MVWV-M207-6	M20 x 1.5	17	20	6.0	43.0 x 58.5
	NVWV-M253-11	MVWV-M253-11	M25 x 1.5	23	25	11.0	59.0 x 67.0
	NVWV-M253-7	MVWV-M253-7	M25 x 1.5	23	25	7.0	55.0 x 67.0
	NVWV-M329-13	MVWV-M329-13	M32 x 1.5	29	32	13.0	68.0 x 74.5
	NVWV-M329-8	MVWV-M329-8	M32 x 1.5	29	32	8.0	63.0 x 74.5
	NVWV-M406-13	MVWV-M406-13	M40 x 1.5	36	40	13.0	80.5 x 98.0
	NVWV-M406-8	MVWV-M406-8	M40 x 1.5	36	40	8.0	75.5 x 98.0
	NVWV-M508-14	MVWV-M508-14	M50 x 1.5	48	50	14.0	95.5 x 111.0
NVWV-M508-9	MVWV-M508-9	M50 x 1.5	48	50	9.0	90.5 x 111.0	
NVWV-M638-14	MVWV-M638-14	M63 x 1.5	48	50	14.0	94.5 x 114.0	
NVWV-M638-10	MVWV-M638-10	M63 x 1.5	48	50	10.0	90.5 x 114.0	

Approvals



For applications in railway vehicles and heavy machine construction
High thread and system connection strength

Note: Curved elbows of type VB are also available for sizes NW 17 to NW 48


⁴ IP68GT available. Please add
"GT" prior to the thread length
(e.g. NVWV-M120GT-10)

Connectors with strain relief, metric, metal thread

Type VWZ

Type VWZ - Connector 90° elbow with strain relief, metric metal thread



	Order no. IP68 Compl., black ⑤	Order no. fitting* ⑤	Order no. insert	Thread metric	Fits to conduit size		Terminal range (mm)	Thread length (mm)	Overall length (mm)
					NW	Metric			
	NVWZ-M160S/P1	NVWZ-M160R/P	E 150p7	M16 x 1.5	10	12	4.0–6.5	8.0	65.0
	NVWZ-M160S/P2	–	E 150p8	M16 x 1.5	10	12	5.0–8.0	8.0	65.0
	NVWZ-M160S/P3	–	E 150p9	M16 x 1.5	10	12	6.5–9.5	8.0	65.0
	NVWZ-M202S/P1	NVWZ-M202R/P	E 152p7	M20 x 1.5	12	16	4.0–6.5	8.0	74.5
	NVWZ-M202S/P3	–	E 152p9	M20 x 1.5	12	16	6.5–9.5	8.0	74.5
	NVWZ-M202S/P4	–	E 152p11	M20 x 1.5	12	16	7.0–10.5	8.0	74.5
	NVWZ-M207S/P1	NVWZ-M207R/P	E 152p7	M20 x 1.5	17	20	4.0–6.5	8.0	81.0
	NVWZ-M207S/P3	–	E 152p9	M20 x 1.5	17	20	6.5–9.5	8.0	81.0
	NVWZ-M207S/P4	–	E 152p11	M20 x 1.5	17	20	7.0–10.5	8.0	81.0
	NVWZ-M207S/P5	–	E 152p13	M20 x 1.5	17	20	9.0–13.0	8.0	81.0
	NVWZ-M257S/P5	NVWZ-M257R/P	E 153p13	M25 x 1.5	17	20	9.0–13.0	8.0	84.0
	NVWZ-M257S/P6	–	E 153p16	M25 x 1.5	17	20	11.5–15.5	8.0	84.0

*without insert

For applications in railway vehicles and heavy machine construction

For the separation of damp and dry areas

Straight connector: Specially formulated polyamide 6

90° elbow: Zinc diecast

Female thread and locknut: Nickel-plated brass

Pflitsch sealing insert: TPE-V

With integrated strain relief and optimal ingress protection at the cable (up to IP68/10 bar)

High thread and system connection strength


Temperature range sealing insert Pflitsch: –40°C to +135°C

⑤ IP68GT available. Please replace “S” or “R” with “GT” (e.g. NVWZ-M160GT/P1)

Connectors PG, polyamide thread

Type VN

Type VN - Connector straight, PG thread

	Order no. IP66 ①	Order no. IP68 ① ②	Thread PG	Fits to conduit size		Thread length (mm)	External dimensions (mm)
				NW	Metric		
	BVND-P07MGT-11	BVNV-P07M	07	07	10	11.0	34.5
	BVND-P07MGT-8	-	07	07	10	8.0	31.5
	BVND-P070GT-11	BVNV-P070	07	10	12	11.0	36.5
	BVND-P070GT-8	-	07	10	12	8.0	33.5
	BVND-P072GT-11	BVNV-P072	07	12	16	11.0	39.0
	BVND-P072GT-8	-	07	12	16	8.0	36.0
	BVND-P09MGT-11	BVNV-P09M	09	07	10	11.0	34.5
	BVND-P09MGT-8	-	09	07	10	8.0	31.5
	BVND-P090GT-11	BVNV-P090	09	10	12	11.0	36.5
	BVND-P090GT-8	-	09	10	12	8.0	33.5
	BVND-P092GT-11	BVNV-P092	09	12	16	11.0	39.0
	BVND-P092GT-8	-	09	12	16	8.0	36.0
	BVND-P097GT-11	BVNV-P097	09	17	20	11.0	47.5
	BVND-P097GT-8	-	09	17	20	8.0	44.5
	BVND-P11MGT-11	BVNV-P11M	11	07	10	11.0	34.5
	BVND-P11MGT-8	-	11	07	10	8.0	31.5
	BVND-P110GT-11	BVNV-P110	11	10	12	11.0	36.5
	BVND-P110GT-8	-	11	10	12	8.0	33.5
	BVND-P112GT-11	BVNV-P112	11	12	16	11.0	39.0
	BVND-P112GT-8	-	11	12	16	8.0	36.0
	BVND-P117GT-11	BVNV-P117	11	17	20	11.0	47.5
	BVND-P117GT-8	-	11	17	20	8.0	44.5
	BVND-P13MGT-11	BVNV-P13M	13.5	07	10	11.0	34.5
	BVND-P13MGT-8	-	13.5	07	10	8.0	31.5
	BVND-P130GT-11	BVNV-P130	13.5	10	12	11.0	36.5
	BVND-P130GT-8	-	13.5	10	12	8.0	33.5
	BVND-P132GT-11	BVNV-P132	13.5	12	16	11.0	39.0
	BVND-P132GT-8	-	13.5	12	16	8.0	36.0
	BVND-P137GT-11	BVNV-P137	13.5	17	20	11.0	47.5
	BVND-P137GT-8	-	13.5	17	20	8.0	44.5
	BVND-P160GT-11	-	16	10	12	11.0	36.5
	BVND-P160GT-8	-	16	10	12	8.0	33.5
	BVND-P162GT-11	BVNV-P162	16	12	16	11.0	39.0
	BVND-P163GT-11	BVNV-P163	16	23	25	11.0	51.0
	BVND-P163GT-8	-	16	23	25	8.0	48.0
	BVND-P167GT-11	BVNV-P167	16	17	20	11.0	47.5
	BVND-P167GT-8	-	16	17	20	8.0	44.5
	BVND-P213GT	BVNV-P213	21	23	25	12.0	52.0
	BVND-P296GT	BVNV-P296	29	36	40	12.0	67.5
	BVND-P299GT	BVNV-P299	29	29	32	12.0	53.0
BVND-P366GT	BVNV-P366	36	36	40	13.0	66.0	
BVND-P368GT	BVNV-P368	36	48	50	13.0	68.5	
BVND-P428GT	BVNV-P428	42	48	50	13.0	68.5	
BVND-P488GT	BVNV-P488	48	48	50	13.0	66.5	

Approvals




- ① Please replace "B" for black with "S" for grey in front of the order no.
- ② IP68GT available. Please add "GT" after the order no.

For cable protection systems in a wide range of applications

Connectors PG, polyamide thread

Type VNDZ/VNZ & VA

Type VNDZ/VNZ - Connector straight with strain relief, PG thread

	Order no. IP66 ①	Order no. IP68 ① ③	Thread PG	Fits to conduit size		Terminal range	Thread length (mm)	Overall length (mm)
				NW	Metric			
	BVNDZ-P090GT	BVNZ-P090S	09	10	12	4.0–8.0	7.5	56.0
	BVNDZ-P112GT	BVNZ-P112S	11	12	16	5.0–10.0	8.0	60.5
	BVNDZ-P132GT	BVNZ-P132S	13.5	12	16	6.0–12.0	9.0	62.0
	BVNDZ-P137GT	BVNZ-P137S	13.5	17	20	6.0–12.0	9.0	69.0
	BVNDZ-P167GT	BVNZ-P167S	16	17	20	10.0–14.0	10.0	72.0
	BVNDZ-P163GT	BVNZ-P163S	16	23	25	10.0–14.0	10.0	79.0
	BVNDZ-P213GT	BVNZ-P213S	21	23	25	13.0–18.0	11.0	82.0
	BVNDZ-P299GT	BVNZ-P299S	29	29	32	18.0–25.0	11.0	85.0
	BVNDZ-P366GT	BVNZ-P366S	36	36	40	22.0–32.0	13.0	112.0
	BVNDZ-P488GT	BVNZ-P488S	48	48	50	34.0–44.0	14.0	112.0

For machine and plant construction


For separation of damp and dry areas

Integrated strain relief optimally holds and seals cables

If several conductors are used with the connector multiple sealing inserts should be considered

Note: For several conductors multiple sealing inserts MDE are available

Type VA - Connector 45° elbow, PG thread

	Order no. IP66 ①	Order no. IP68 ① ②	Thread PG	Fits to conduit size		Thread length (mm)	Overall length (mm)
				NW	Metric		
	BVAD-P090GT	BVAV-P090	09	10	12	11.0	43.5 x 37.0
	BVAD-P112GT	BVAV-P112	11	12	16	11.0	48.0 x 40.0
	BVAD-P132GT	BVAV-P132	13.5	12	16	11.0	48.0 x 41.5
	BVAD-P137GT	BVAV-P137	13.5	17	20	11.0	55.5 x 51.5
	BVAD-P167GT	BVAV-P167	16	17	20	11.0	55.5 x 51.5
	BVAD-P213GT	BVAV-P213	21	23	25	11.0	63.0 x 58.0
	BVAD-P299GT	BVAV-P299	29	29	32	12.0	69.0 x 66.0
	BVAD-P366GT	BVAV-P366	36	36	40	13.0	86.0 x 86.0
	BVAD-P488GT	BVAV-P488	48	48	50	13.0	94.0 x 100.0

Approvals



For cable protection systems in a wide range of applications

① Please replace "B" for black with "S" for grey in front of the order no.


② IP68GT available. Please add "GT" after the order no.

③ IP68GT available. Please replace "S" at the end with "GT" (e.g. BVNZ-P167GT).

Connectors PG, polyamide thread

Type VB

Type VB - Connector 90° curved elbow, PG thread

	Order no. IP66 ①	Order no. IP68 ① ②	Thread PG	Fits to conduit size		Thread length (mm)	External dimensions (mm)
				NW	Metric		
	BVBD-P167GT	BVBV-P167	16	17	20	11.0	47.5 x 73.0
	BVBD-P213GT	BVBV-P213	21	23	25	12.0	57.5 x 85.0
	BVBD-P299GT	BVBV-P299	29	29	32	12.0	67.5 x 96.0
	BVBD-P366GT	BVBV-P366	36	36	40	13.0	79.0 x 123.0
	BVBD-P488GT	BVBV-P488	48	48	50	13.0	92.5 x 135.0

Approvals



For cable protection systems in a wide range of applications

Smooth elbow allows easy threading of wires and cables

Note: For smaller conduit sizes NW 07 to NW 12 appropriate standard elbows of type VW are also available

① Please replace "B" for black with "S" for grey in front of the order no.

② IP68GT available. Please add "GT" after the order no.

Connectors PG, polyamide thread

Type VW

Type VW - Connector 90° elbow, PG thread

	Order no. IP66 ①	Order no. IP68 ① ②	Thread PG	Fits to conduit size		Thread length (mm)	External dimensions (mm)
				NW	Metric		
	BVWD-P07MGT-11	BVWV-P07M	07	07	10	11.0	32.0 x 35.0
	BVWD-P07MGT-8	-	07	07	10	8.0	29.0 x 35.0
	BVWD-P070GT-11	BVWV-P070	07	10	12	11.0	34.0 x 39.5
	BVWD-P070GT-8	-	07	10	12	8.0	31.0 x 39.5
	BVWD-P072GT-11	BVWV-P072	07	12	16	11.0	38.5 x 44.5
	BVWD-P072GT-8	-	07	12	16	8.0	35.5 x 44.5
	BVWD-P09MGT-11	BVWV-P09M	09	07	10	11.0	32.0 x 36.5
	BVWD-P09MGT-8	-	09	07	10	8.0	29.0 x 36.5
	BVWD-P090GT-11	BVWV-P090	09	10	12	11.0	34.0 x 39.5
	BVWD-P090GT-8	-	09	10	12	8.0	31.0 x 39.5
	BVWD-P092GT-11	BVWV-P092	09	12	16	11.0	38.5 x 44.5
	BVWD-P092GT-8	-	09	12	16	8.0	35.5 x 44.5
	BVWD-P11MGT-11	BVWV-P11M	11	07	10	11.0	32.0 x 38.0
	BVWD-P11MGT-8	-	11	07	10	8.0	29.0 x 38.0
	BVWD-P110GT-11	BVWV-P110	11	10	12	11.0	34.0 x 41.0
	BVWD-P110GT-8	-	11	10	12	8.0	31.0 x 41.0
	BVWD-P112GT-11	BVWV-P112	11	12	16	11.0	38.5 x 46.0
	BVWD-P112GT-8	-	11	12	16	8.0	35.5 x 46.0
	BVWD-P13MGT-11	BVWV-P13M	13.5	07	10	11.0	32.0 x 39.5
	BVWD-P13MGT-8	-	13.5	07	10	8.0	29.0 x 39.5
	BVWD-P130GT-11	BVWV-P130	13.5	10	12	11.0	34.0 x 42.5
	BVWD-P130GT-8	-	13.5	10	12	8.0	31.0 x 42.5
	BVWD-P132GT-11	BVWV-P132	13.5	12	16	11.0	38.5 x 47.5
	BVWD-P132GT-8	-	13.5	12	16	8.0	35.5 x 47.5
	BVWD-P137GT-11	BVWV-P137	13.5	17	20	11.0	43.5 x 58.5
	BVWD-P137GT-8	-	13.5	17	20	8.0	40.5 x 58.5
	BVWD-P167GT-11	BVWV-P167	16	17	20	11.0	43.5 x 58.5
	BVWD-P167GT-8	-	16	17	20	8.0	40.5 x 58.5
	BVWD-P213GT	BVWV-P213	21	23	25	12.0	54.0 x 67.0
	BVWD-P299GT	BVWV-P299	29	29	32	12.0	61.5 x 74.5
BVWD-P366GT	BVWV-P366	36	36	40	13.0	72.0 x 98.0	
BVWD-P488GT	BVWV-P488	48	48	50	13.0	85.5 x 111.0	

Approvals



For cable protection systems in a wide range of applications


Note: For sizes NW 17 to NW 48 curved elbows of type VB are also available

- ① Please replace "B" for black with "S" for grey in front of the order no.
- ② IP68GT available. Please add "GT" after the order no.

Connectors PG, metal thread

Type VNV

Type VNV - Connector straight, PG metal thread

	Order no. IP68, black ^②	Order no. IP68, grey ^②	Thread PG	Fits to conduit size		Thread length (mm)	Overall length (mm)
				NW	Metric		
	NVNV-P090	MVNV-P090	09	10	12	12.0	42.0
	NVNV-P112	MVNV-P112	11	12	16	12.0	45.0
	NVNV-P137	MVNV-P137	13.5	17	20	13.0	54.0
	NVNV-P167	MVNV-P167	16	17	20	13.0	54.0
	NVNV-P213	MVNV-P213	21	23	25	14.0	57.0
	NVNV-P293	MVNV-P293	29	23	25	14.0	57.0
	NVNV-P299	MVNV-P299	29	29	32	14.0	58.5
	NVNV-P366	MVNV-P366	36	36	40	17.0	75.5
	NVNV-P488	MVNV-P488	48	48	50	17.0	75.5

Approvals



For applications in railway vehicles and heavy machine construction
High thread and system connection strength


^② IP68GT available. Please add
"GT" after the order no.

Connectors PG, with strain relief, metal thread

Type VNZ

Type VNZ - Connector straight with strain relief, PG metal thread



	Order no. IP68 Compl., black ⑤	Order no. fitting* ⑤	Order no. insert	Thread PG	Fits to conduit size		Terminal range (mm)	Thread length (mm)	Overall length (mm)
					NW	Metric			
	NVNZ-P090S/P1	NVNZ-P090R/P	E 150p7	09	10	12	4.0–6.5	6.0	49.5
	NVNZ-P090S/P3	–	E 150p9	09	10	12	6.5–9.5	6.0	49.5
	NVNZ-P110S/P1	NVNZ-P110R/P	E 151p7	11	10	12	4.0–6.5	6.0	52.0
	NVNZ-P110S/P3	–	E 151p9	11	10	12	6.5–9.5	6.0	52.0
	NVNZ-P112S/P1	NVNZ-P112R/P	E 151p7	11	12	16	4.0–6.5	6.0	53.5
	NVNZ-P112S/P3	–	E 151p9	11	12	16	6.5–9.5	6.0	53.5
	NVNZ-P112S/P4	–	E 151p11	11	12	16	7.0–10.5	6.0	53.5
	NVNZ-P160S/P1	NVNZ-P160R/P	E 152p11	16	10	12	4.0–6.5	6.5	52.5
	NVNZ-P167S/P3	NVNZ-P167R/P	E 153p9	16	17	20	6.5–9.5	6.5	61.0
	NVNZ-P167S/P4	–	E 153p11	16	17	20	7.0–10.5	6.5	61.0
	NVNZ-P167S/P5	–	E 153p13	16	17	20	9.0–13.0	6.5	61.0
	NVNZ-P167S/P6	–	E 153p16	16	17	20	11.5–15.5	6.5	61.0
	NVNZ-P213S/P1	NVNZ-P213R/P	E 154p11	21	23	25	7.0–10.5	7.0	72.0
	NVNZ-P213S/P4	–	E 154p18	21	23	25	14.0–18.0	7.0	72.0
	NVNZ-P213S/P5	NVNZ-P213R1/P	E 154p20	21	23	25	17.0–20.5	7.0	72.0
	NVNZ-P299S/P3	NVNZ-P299R/P	E 155p20	29	29	32	17.0–20.5	8.0	73.5
	NVNZ-P299S/P4	–	E 155p25	29	29	32	20.0–25.0	8.0	73.5
	NVNZ-P299S/P5	–	E 155p28	29	29	32	24.0–28.0	8.0	73.5
	NVNZ-P366S/P1	NVNZ-P366R/P	E 156p32	36	36	40	27.0–32.0	9.0	88.0
	NVNZ-P366S/P2	–	E 156p34	36	36	40	29.0–34.0	9.0	88.0
NVNZ-P366S/P3	–	E 156p36	36	36	40	32.0–36.0	9.0	88.0	
NVNZ-P488S/P1	NVNZ-P488R/P	E 158pm 1x35	48	48	50	32.0–35.0	10.0	90.5	
NVNZ-P488S/P2	–	E 158p44	48	48	50	39.0–44.0	10.0	90.5	

*without insert

For applications in railway vehicles and heavy machine construction

For the separation of damp and dry areas

Sealing inserts are made from TPE-V

With integrated strain relief and optimal ingress protection at the cable (up to IP68/10 bar)

High thread and system connection strength

Temperature range sealing insert Pflitsch: –40°C to +135°C


Note: For several conductors multiple sealing inserts MDE are available

R/P version of fitting has to be used in combination with multiple sealing inserts

Connectors PG, metal thread

Type VAV & VBV

Type VAV - Connector 45° elbow, PG metal thread


	Order no. IP68, black ②	Order no. IP68, grey ②	Thread			Thread length (mm)	External dimensions (mm)
			PG	NW	Metric		
	NVAV-P090	MVAV-P090	09	10	12	12.0	50.5 x 37.0
	NVAV-P112	MVAV-P112	11	12	16	12.0	55.0 x 40.5
	NVAV-P137	MVAV-P137	13.5	17	20	13.0	63.5 x 50.0
	NVAV-P167	MVAV-P167	16	17	20	13.0	63.5 x 50.0
	NVAV-P213	MVAV-P213	21	23	25	14.0	73.0 x 60.5
	NVAV-P299	MVAV-P299	29	29	32	14.0	78.0 x 68.0
	NVAV-P366	MVAV-P366	36	36	40	17.0	98.0 x 87.5
	NVAV-P488	MVAV-P488	48	48	50	17.0	105.0 x 101.0

Approvals



For applications in railway vehicles and heavy machine construction
High thread and system connection strength

Type VBV - Connector 90° curved elbow, PG metal thread

	Order no. IP68, black ②	Order no. IP68, grey ②	Thread			Thread length (mm)	External dimensions (mm)
			PG	NW	Metric		
	NVBV-P167	MVBV-P167	16	17	20	13.0	54.0 x 73.0
	NVBV-P213	MVBV-P213	21	23	25	14.0	65.5 x 85.0
	NVBV-P299	MVBV-P299	29	29	32	14.0	75.0 x 96.0
	NVBV-P366	MVBV-P366	36	36	40	17.0	90.5 x 123.0
	NVBV-P488	MVBV-P488	48	48	50	17.0	103.5 x 135.0

Approvals



For applications in railway vehicles and heavy machine construction
High thread and system connection strength

Smooth elbow allows easy threading of wires and cables


Note: For smaller conduit sizes NW 10 to NW 12 appropriate standard elbows of type VW are also available

② IP68GT available. Please add
"GT" after the order no.

Connectors PG, metal thread

Type VWV

Type VWV - Connector 90° elbow, PG metal thread

	Order no. IP68, black ②	Order no. IP68, grey ②	Thread			Fits to conduit size	Thread length (mm)	External dimensions (mm)
			PG	NW	Metric			
	NVWV-P090	MVWV-P090	09	10	12	12.0	39.5 x 39.5	
	NVWV-P112	MVWV-P112	11	12	16	12.0	45.5 x 45.0	
	NVWV-P137	MVWV-P137	13.5	17	20	13.0	50.0 x 58.5	
	NVWV-P167	MVWV-P167	16	17	20	13.0	50.0 x 58.5	
	NVWV-P213	MVWV-P213	21	23	25	14.0	62.0 x 67.0	
	NVWV-P299	MVWV-P299	29	29	32	14.0	69.0 x 74.5	
	NVWV-P366	MVWV-P366	36	36	40	17.0	83.5 x 98.0	
	NVWV-P488	MVWV-P488	48	48	50	17.0	96.5 x 111.0	

Approvals



For applications in railway vehicles and heavy machine construction
High thread and system connection strength


Note: Curved elbows of type VB are also available for sizes NW 17 to NW 48

② IP68GT available. Please add
"GT" after the order no.

Connectors GAS, polyamide thread


Type VN & VW

Type VN - Connector straight, GAS thread

	Order no. IP66	Order no. IP68	Thread GAS	Fits to conduit size		Thread length (mm)	Overall length (mm)
				NW	Metric		
	BVND-G00MGT	BVNV-G00M	¼"	07	10	11.0	34.5
	BVND-G000GT	BVNV-G000	¼"	10	12	11.0	36.5
	BVND-G010GT	BVNV-G010	⅜"	10	12	11.0	36.5
	BVND-G012GT	BVNV-G012	⅜"	12	16	11.0	39.0
	BVND-G022GT	BVNV-G022	½"	12	16	13.0	41.0
	BVND-G027GT	BVNV-G027	½"	17	20	13.0	49.5
	BVND-G043GT	BVNV-G043	¾"	23	25	14.0	54.0
	BVND-G069GT	BVNV-G069	1"	29	32	15.0	56.0
	BVND-G076GT	BVNV-G076	1¼"	36	40	18.0	71.0
	BVND-G088GT	BVNV-G088	1½"	48	50	18.0	71.5
	BVND-G098GT	BVNV-G098	2"	48	50	18.0	71.5

For cable protection systems in a wide range of applications

Type VW - Connector 90° elbow, GAS thread


	Order no. IP66	Thread GAS	Fits to conduit size		Thread length (mm)	External dimensions (mm)
			NW	Metric		
	BVWD-G00MGT	¼"	07	10	11.0	32.0 x 36.5
	BVWD-G000GT	¼"	10	12	11.0	34.0 x 39.5
	BVWD-G010GT	⅜"	10	12	11.0	34.0 x 40.5
	BVWD-G012GT	⅜"	12	16	11.0	38.5 x 46.0
	BVWD-G022GT	½"	12	16	13.0	40.5 x 47.5
	BVWD-G027GT	½"	17	20	13.0	45.5 x 58.5
	BVWD-G043GT	¾"	23	25	14.0	56.0 x 66.5
	BVWD-G069GT	1"	29	32	15.0	64.5 x 73.5
	BVWD-G076GT	1¼"	36	40	18.0	77.0 x 96.0
	BVWD-G088GT	1½"	48	50	18.0	90.5 x 106.0
	BVWD-G098GT	2"	48	50	18.0	90.5 x 111.0

For cable protection systems in a wide range of applications

Connectors NPT, polyamide thread

Type VN & VA

Type VN - Connector straight, NPT thread


	Order no. IP66 ①	Order no. IP68 ① ②	Thread NPT	Fits to conduit size		Thread length (mm)	Overall length (mm)
				NW	Metric		
	BVND-N022GT	BVNV-N022	½"	12	16	13.0	41.5
	BVND-N027GT	BVNV-N027	½"	17	20	13.0	49.5
	BVND-N043GT	BVNV-N043	¾"	23	25	14.0	54.0
	BVND-N069GT	BVNV-N069	1"	29	32	15.0	56.0
	BVND-N076GT	BVNV-N076	1¼"	36	40	18.0	71.0
	BVND-N088GT	BVNV-N088	1½"	48	50	18.0	71.5
	BVND-N098GT	BVNV-N098	2"	48	50	18.0	71.5

Approvals



For cable protection systems in a wide range of applications

Type VA - Connector 45° elbow, NPT thread

	Order no. IP66 ①	Order no. IP68 ① ②	Thread NPT	Fits to conduit size		Thread length (mm)	External dimensions (mm)
				NW	Metric		
	BVAD-N022GT	BVAV-N022	½"	12	16	13.0	50.0 x 41.5
	BVAD-N027GT	BVAV-N027	½"	17	20	13.0	57.5 x 51.5
	BVAD-N043GT	BVAV-N043	¾"	23	25	14.0	67.0 x 60.0
	BVAD-N069GT	BVAV-N069	1"	29	32	15.0	73.5 x 67.0
	BVAD-N076GT	BVAV-N076	1¼"	36	40	18.0	91.5 x 85.5
	BVAD-N088GT	BVAV-N088	1½"	48	50	18.0	99.0 x 96.0
	-	BVAV-N098	2"	48	50	18.0	99.0 x 101.0

Approvals




For cable protection systems in a wide range of applications

- ① Please replace "B" for black with "S" for grey in front of the order no.
- ② IP68GT available. Please add "GT" after the order no.

Connectors NPT, polyamide thread

Type VW

Type VW - Connector 90° elbow, NPT thread

	Order no. IP66 ①	Order no. IP68 ① ②	Thread NPT	Fits to conduit size		Thread length (mm)	External dimensions (mm)
				NW	Metric		
	BVWD-N022GT	BVWV-N022	½"	12	16	13.0	40.5 x 47.5
	BVWD-N027GT	BVWV-N027	½"	17	20	13.0	45.5 x 58.5
	BVWD-N043GT	BVWV-N043	¾"	23	25	14.0	56.0 x 66.5
	BVWD-N069GT	BVWV-N069	1"	29	32	15.0	64.5 x 73.5
	BVWD-N076GT	BVWV-N076	1¼"	36	40	18.0	77.0 x 96.0
	BVWD-N088GT	BVWV-N088	1½"	48	50	18.0	90.5 x 106.0
	BVWD-N098GT	BVWV-N098	2"	48	50	18.0	90.5 x 111.0

Approvals



For applications in railway vehicles and heavy machine construction
High thread and system connection strength


Note: Curved elbows of type VB are also available for sizes NW 17 to NW 48


- ① Please replace "B" for black with "S" for grey in front of the order no.
- ② IP68GT available. Please add "GT" after the order no.

Swivel connectors, metric/PG/NPT metal thread

Type SBV & SWV/SBV


Type SBV - Swivel connector 90° curved elbow, metric/PG metal thread

	Order no. IP68, black ④	Thread metric	Fits to conduit size		Thread length (mm)	External dimensions (mm)
			NW	Metric		
	NSBV-M207-10	M20 x 1.5	17	20	10.0	62.5 x 74.5
	NSBV-M253-11	M25 x 1.5	23	25	11.0	73.0 x 87.5
	NSBV-M329-13	M32 x 1.5	29	32	13.0	86.5 x 98.0
	NSBV-M406-13	M40 x 1.5	36	40	13.0	98.5 x 127.5
	NSBV-M409-13	M40 x 1.5	29	32	13.0	86.5 x 98.0
	NSBV-M508-14	M50 x 1.5	48	50	14.0	113.5 x 139.0
	NSBV-M638-14	M63 x 1.5	48	50	14.0	110.0 x 139.0

	Order no. IP68, black ④	Thread PG	Fits to conduit size		Thread length (mm)	External dimensions (mm)
			NW	Metric		
Approvals 	NSBV-P167-6.5	16	17	20	6.5	58.0 x 74.5
	NSBV-P213-7	21	23	25	7.0	69.0 x 87.5
	NSBV-P299-8	29	29	32	8.0	80.0 x 98.0
	NSBV-P366-9	36	36	40	9.0	91.5 x 127.5
	NSBV-P488-10	48	48	50	10.0	106.0 x 139.0

For applications with high technical requirements mainly in machine building
 Suitable for occasional rotation
 Thread and integrated swivel adapter made from nickel-plated brass
 High thread and system connection strength
 Smooth elbow allows easy threading of wires and cables

Type SWV/SBV - Swivel connector 90° curved elbow, NPT metal thread

	Order no. IP68, black ④	Thread NPT	Fits to conduit size		Thread length (mm)	External dimensions (mm)
			NW	Metric		
	NSWV-N022/01	½"	12	16	15.4	57.0 x 48.5
	NSBV-N027/01	½"	17	20	15.4	66.5 x 74.5
	NSBV-N043/01	¾"	23	25	15.7	77.5 x 87.5
	NSBV-N069/01	1"	29	32	19.6	92.0 x 98.0
	NSBV-N076/01	1¼"	36	40	20.2	104.5 x 125.5
	NSBV-N088/01	1½"	48	50	20.6	118.5 x 138.5
	NSBV-N098/01	2"	48	50	21.4	119.5 x 138.5

Approvals




For applications with high technical requirements mainly in heavy machine building and rail applications
 Suitable for occasional rotation
 Thread and integrated swivel adapter made from colourless anodized aluminium
 High thread and system connection strength
 Smooth elbow allows easy threading of wires and cables

④ IP68GT available. Please add
 "GT" prior to the thread length
 (for example NSBV-M329GT-13)

Swivel connectors, metric/NPT metal thread

Type SNV

Type SNV - Swivel connector, straight, IP68 metric metal thread


	Order no. IP68, black ⁴	Thread metric	Fits to conduit size		Thread length (mm)	Overall length (mm)
			NW	Metric		
	NSNV-M120-10	M12 x 1.5	10	12	10.0	50.5
	NSNV-M162-10	M16 x 1.5	12	16	10.0	53.5
	NSNV-M207-10	M20 x 1.5	17	20	10.0	62.5
	NSNV-M253-11	M25 x 1.5	23	25	11.0	67.5
	NSNV-M329-13	M32 x 1.5	29	32	13.0	72.0
	NSNV-M329-7	M32 x 1.5	29	32	7.0	66.0
	NSNV-M406-13	M40 x 1.5	36	40	13.0	85.5
	NSNV-M406-7	M40 x 1.5	36	40	7.0	79.5
	NSNV-M409-13	M40 x 1.5	29	32	13.0	72.0
	NSNV-M508-14	M50 x 1.5	48	50	14.0	87.5
NSNV-M638-14	M63 x 1.5	48	50	14.0	84.0	

Approvals



For applications in railway vehicles and heavy machine construction
 Specially formulated polyamide 6
 Thread and integrated swivel adapter made from nickel-plated brass
 Very high impact resistance. High thread and system connection strength. Suitable for occasional rotation
 Easy introduction of wires and cables
 Vibration-proof connection to PMAFLEX conduits
 Very good chemical properties
 Free from halogens and cadmium
 Fits both conduit profiles – fine (T) and coarse (G)
 IP68, IP69

Type SNV - Swivel connector, straight, NPT metal thread

	Order no. IP68, black ⁴	Thread NPT	Fits to conduit size		Thread length (mm)	Overall length (mm)
			NW	Metric		
	NSNV-N022/01	½"	12	16	15.4	58.0
	NSNV-N027/01	½"	17	20	15.4	66.5
	NSNV-N043/01	¾"	23	25	15.7	72.0
	NSNV-N069/01	1"	29	32	19.6	77.5
	NSNV-N076/01	1¼"	36	40	20.2	91.5
	NSNV-N088/01	1½"	48	50	20.6	92.0
	NSNV-N098/01	2"	48	50	21.4	93.0

Approvals




For applications with high technical requirements mainly in machine building
 Specially formulated polyamide 6
 Thread and integrated swivel adapter made from colourless anodized aluminium
 Very high impact resistance. High thread and system connection strength. Suitable for occasional rotation
 Easy introduction of wires and cables
 Vibration-proof connection to PMAFLEX conduits
 Very good chemical properties
 Free from halogens and cadmium
 Fits both conduit profiles – fine (T) and coarse (G)
 IP68, IP69

⁴ IP68GT available. Please add
 "GT" prior to the thread length
 (for example NSBV-M329GT-13)

Swivel connectors with female NPT metal thread

Type SNIV & SBIV

Type SNIV - Swivel connector straight, female NPT metal thread, IP68


	Order no. black ⁴	Thread metric	Fits to conduit size		Thread length (mm)	Overall length (mm)
			NW	Metric		
	NSNIV-N022/01	½"	12	16	13.6	59.0
	NSNIV-N027/01	½"	17	20	13.6	67.0
	NSNIV-N043/01	¾"	23	25	14.1	72.5
	NSNIV-N069/01	1"	29	32	16.8	76.5
	NSNIV-N076/01	1¼"	36	40	17.3	91.5
	NSNIV-N088/01	1½"	48	50	17.3	93.5
	NSNIV-N098/01	2"	48	50	17.8	93.0

Approvals



For applications with high technical requirements mainly in machine building

Type SBIV - 360° Swivel connector, 90° curved elbow, IP68, female NPT metal thread

	Order no. IP68, black ⁴	Thread NPT	Fits to conduit size		Thread length (mm)	Overall length (mm)
			NW	Metric		
	NSBIV-N022/01	½"	12	16	13.6	48.5 x 46.5
	NSBIV-N027/01	½"	17	20	13.6	67.0 x 74.5
	NSBIV-N043/01	¾"	23	25	14.1	78.0 x 87.5
	NSBIV-N069/01	1"	29	32	16.8	91.0 x 98.0
	NSBIV-N076/01	1¼"	36	40	17.3	104.5 x 125.5
	NSBIV-N088/01	1½"	48	50	17.3	119.5 x 138.5
	NSBIV-N098/01	2"	48	50	17.8	119.0 x 138.5

Approvals




Technical requirements mainly in heavy machine building and rail applications
 Suitable for occasional rotation
 Specially formulated polyamide 6
 Thread and integrated swivel adapter made from colourless anodized aluminium
 Very high impact resistance
 High thread and system connection strength
 Suitable for occasional rotation
 Easy introduction of wires and cables
 Vibration-proof connection to PMAFLEX conduits
 Very good chemical properties
 Free from halogens and cadmium
 Fits both conduit profiles – fine (T) and coarse (G)
 IP68, IP69

⁴ IP68GT available. Please add
 "GT" prior to the thread length
 (for example NSBV-M329GT-13)

Flanges, connectors with female, metric thread


Type VO & VI

Type VO - Flange 90°

	Order no. IP66 ①	Order no. IP68 ① ②	Fits to conduit size		Width x Length x Depth (mm)	Screw sizes
			NW	Metric		
	BVOD-P167GT	BVOV-P167	17	20	46.0 x 65.5 x 35.8	2 x M5
	BVOD-P213GT	BVOV-P213	23	25	65.5 x 70.5 x 43.2	2 x M6
	BVOD-P299GT	BVOV-P299	29	32	67.0 x 78.0 x 49.5	4 x M6
	BVOD-P366GT	BVOV-P366	36	40	85.0 x 102.0 x 65.5	4 x M6
	BVOD-P488GT	BVOV-P488	48	50	86.0 x 119.0 x 77.5	4 x M6

For cable protection systems in a wide range of applications
 Flange seal FGO4 made from EPDM, flange seal FGO4/01 made from NBR
 Temperature range with FGO4: -40°C to +105°C
 Temperature range with FGO4/01: -25°C to +70°C

Type VI - Connector straight, female metric thread

	Order no. IP66, black	Order no. IP68, black ②	Thread metric	Fits to conduit size		Thread length (mm)	Overall length (mm)
				NW	Metric		
	BVID-M12MGT	-	M12 x 1.5	07	10	8.0	32.0
	BVID-M160GT	BVIR-M160	M16 x 1.5	10	12	8.0	33.5
	BVID-M162GT	BVIR-M162	M16 x 1.5	12	16	8.0	36.5
	-	BVIR-M202	M20 x 1.5	12	16	8.0	36.5
	BVID-M207GT	BVIR-M207	M20 x 1.5	17	20	8.0	44.5
	BVID-M253GT	BVIR-M253	M25 x 1.5	23	25	8.0	48.5
	-	BVIR-M257	M25 x 1.5	17	20	8.0	44.5
	BVID-M329GT	BVIR-M329	M32 x 1.5	29	32	10.0	51.5
	BVID-M406GT	BVIR-M406	M40 x 1.5	36	40	10.0	65.5
	BVID-M508GT	BVIR-M508	M50 x 1.5	48	50	10.0	65.5
BVID-M638GT	BVIR-M638	M63 x 1.5	48	50	10.0	65.5	

Approvals




For cable protection systems in a wide range of applications
 VID: IP66 static/IP54 dynamic, conduit side
 VIR: IP68 static/IP67 dynamic, conduit side
 No seal on female thread side

- ① Please replace "B" for black with "S" for grey in front of the order no.
- ② IP68GT available. Please add "GT" after the order no.

Connectors with female, metric metal thread

Type VIR

Type VIR - Connector straight, female metric metal thread

	Order no. IP68, black ②	Thread metric	Fits to conduit size		Thread length (mm)	Overall length (mm)
			NW	Metric		
	NVIR-M120	M12 x 1.5	10	12	7.5	35.0
	NVIR-M160	M16 x 1.5	10	12	9.0	40.5
	NVIR-M162	M16 x 1.5	12	16	9.0	42.0
	NVIR-M207	M20 x 1.5	17	20	10.0	50.0
	NVIR-M253	M25 x 1.5	23	25	10.0	56.0
	NVIR-M329	M32 x 1.5	29	32	11.0	55.5
	NVIR-M406	M40 x 1.5	36	40	13.0	71.0
	NVIR-M508	M50 x 1.5	48	50	15.0	75.0
	NVIR-M638	M63 x 1.5	48	50	17.5	76.0

Approvals



For applications in railway vehicles and heavy machine construction
 High thread and system connection strengths
 VIR: IP68 static/IP67 dynamic, conduit side
 No seal on female thread side


① Please replace "B" for black with "S" for grey in front of the order no.

② IP68GT available. Please add "GT" after the order no.

Connector straight, PG female thread

Type FIL/VIR & VIZR

Type FIL/VIR - Connector straight, female PG thread

	Order no. IP67, black	Order no. IP68, black ^②	Thread PG	Fits to conduit size		Thread length (mm)	Overall length (mm)
				NW	Metric		
	BFIL-P07M	–	07	07	10	8.0	29.0
	BFIL-P070	–	07	10	12	8.0	34.5
	–	BVIR-P070	07	10	12	8.0	33.5
	BFIL-P090	–	09	10	12	8.0	32.5
	–	BVIR-P090	09	10	12	8.0	33.5
	BFIL-P112	–	11	12	16	8.0	32.5
	–	BVIR-P112	11	12	16	8.0	36.5
	BFIL-P117	–	11	17	20	8.0	35.0
	BFIL-P132	–	13.5	12	16	8.0	32.5
	BFIL-P137	–	13.5	17	20	8.0	33.5
	BFIL-P160	–	16	10	12	7.0	37.0
	BFIL-P167	–	16	17	20	8.0	33.5
	–	BVIR-P167	16	17	20	8.0	44.5
	BFIL-P217	–	21	17	20	10.5	35.5
	BFIL-P213	–	21	23	25	8.0	39.0
	BFIL-P293	–	29	23	25	9.0	42.0
	BFIL-P299	–	29	29	32	9.0	43.0
	BFIL-P369	–	36	29	32	16.0	52.0
	BFIL-P366	–	36	36	25	13.0	64.0
	BFIL-P488	–	48	48	50	13.0	65.0


For cable protection systems in a wide range of applications

VIR: IP68 static/IP67 dynamic, conduit side

FIL: IP67 static/IP65 dynamic, conduit side

No seal on female thread side

Type VIZR - Connector straight, female PG metal thread

	Order no. IP68, black ^②	Thread PG	Fits to conduit size		Thread length (mm)	Overall length (mm)
			NW	Metric		
	NVIZR-P07M	07	07	10	6.0	35.0
	NVIZR-P090	09	10	12	9.0	38.5
	NVIZR-P110	11	10	12	9.0	41.0
	NVIZR-P112	11	12	16	9.0	42.0
	NVIZR-P137	13.5	17	20	8.0	46.5
	NVIZR-P167	16	17	20	9.5	48.0
	NVIZR-P213	21	23	25	10.0	58.0
	NVIZR-P299	29	29	32	12.5	57.0
	NVIZR-P366	36	36	40	13.0	76.0
	NVIZR-P488	48	48	50	14.0	75.0

For applications in railway vehicles and heavy machine construction

High thread and system connection strengths

VIZR: IP68 static/IP67 dynamic, conduit side


No seal on female thread side

^② IP68GT available. Please add
"GT" after the order no.

Connectors with female UNEF thread

Type VI

Type VI - Connector straight, UNEF female thread for AMP connectors

	Order no. IP66, black	Order no. IP68, black ②	Thread UNEF	Fits to conduit size		Thread length (mm)	Overall length (mm)
				NW	Metric		
	BVIDA-U15MGT	BVIRA-U15M	5/8"-24	07	10	8.0	31.5
	BVIDA-U150GT	BVIRA-U150	5/8"-24	10	12	8.0	33.5
	BVIDA-U152GT	BVIRA-U152	5/8"-24	12	16	8.0	36.5
	BVIDA-U180GT	BVIRA-U180	3/4"-20	10	12	8.0	33.5
	BVIDA-U182GT	BVIRA-U182	3/4"-20	12	16	8.0	36.5
	BVIDA-U187GT	BVIRA-U187	3/4"-20	17	20	8.0	44.5
	BVIDA-U232GT	BVIRA-U232	1 5/16"-20	12	16	8.0	38.5
	BVIDA-U237GT	BVIRA-U237	1 5/16"-20	17	20	8.0	46.5
	BVIDA-U233GT	BVIRA-U233	1 5/16"-20	23	25	8.0	48.5
	BVIDA-U347GT	BVIRA-U347	1 3/8"-18	17	20	8.0	46.5
	BVIDA-U343GT	BVIRA-U343	1 3/8"-18	23	25	8.0	48.5
	BVIDA-U402GT	BVIRA-U402	1 5/8"-18	12	16	7.0	55.5
	BVIDA-U407GT	BVIRA-U407	1 5/8"-18	17	20	7.0	61.5
	BVIDA-U403GT	BVIRA-U403	1 5/8"-18	23	25	7.0	60.5

For cable protection systems in a wide range of applications
 Suitable for the AMP connector serie CPC
 VIDA: IP66 static/IP54 dynamic, conduit side. VIRA: IP68 static/IP67 dynamic, conduit side
 No seal on female thread side

Type VI - Connector straight, UNEF female thread for Souriau connectors

	Order no. IP66, black	Order no. IP68, black ②	Thread UNEF	Fits to NW	Shell size UTG-6	Thread length (mm)	Overall length (mm)
BVIDB-U202GT	BVIRB-U202	1 3/16"-20	12	14-12	4.5	44.0	
BVIDB-U232GT	BVIRB-U232	1 5/16"-20	12	16-19	4.5	49.0	
BVIDB-U237GT	BVIRB-U237	1 5/16"-20	17	16-19	4.5	52.0	
BVIDB-U267GT	BVIRB-U267	1 1/2"-18	17	18-23	4.5	52.0	
BVIDB-U297GT	BVIRB-U297	1 3/16"-18	17	20-28	6.5	55.5	
BVIDB-U293GT	BVIRB-U293	1 3/16"-18	23	20-28	6.5	52.0	
BVIDB-U323GT	BVIRB-U323	1 5/16"-18	23	22-35	6.5	52.0	
BVIDB-U357GT	BVIRB-U357	1 7/16"-18	17	24-48	6.5	58.5	
BVIDB-U353GT	BVIRB-U353	1 7/16"-18	23	24-48	6.5	54.0	
BVIDB-U359GT	BVIRB-U359	1 7/16"-18	29	24-48	6.5	50.5	

For cable protection systems in a wide range of applications
 Suitable for the Souriau connector series UTG-6/ITT Cannon Trident
 VIDB: IP66 static/IP54 dynamic, conduit side. VIRB: IP68 static/IP67 dynamic, conduit side
 No seal on female thread side

	Order no. IP68, black ②	Thread UNEF	Fits to NW	Shell size UTG-6	Thread length (mm)	Overall length (mm)
	BVIRS-U162	1 1/16"-24	12	12	9.4	47.5
	BVIRS-U202	1 3/16"-20	12	14	9.4	47.5
	BVIRS-U237	1 5/16"-20	17	16	10.0	56.0
	BVIRS-U267	1 1/2"-18	17	18	9.2	55.5
	BVIRS-U293	1 3/16"-18	23	20	9.8	56.0
	BVIRS-U323	1 5/16"-18	23	22	9.8	56.0
	BVIRS-U359	1 7/16"-18	29	24	9.7	55.5


② IP68GT available. Please add "GT" after the order no.

For cable protection systems in a wide range of applications
 Suitable for the Souriau connector series UTO and UTS
 VIRS: IP68 static/IP67 dynamic, conduit side. No seal on female thread side

Connectors with female UN thread

Type VI

Type VI - Connector straight, UN female thread for MIL-C5015

	Order no. IP66, black	Order no. IP68, black ^②	Thread UN	Fits to conduit size		Thread length (mm)	Overall length (mm)
				NW	Metric		
	-	BVIVG-U152*	5/8" -24 UNEF	12	16	8.0	36.5
	-	BVIVG-U187*	3/4" -20 UNEF	17	20	9.0	46.5
	-	BVIVG-U210*	7/8" -20 UNEF	10	07	9.0	37.0
	BVIDG-U212GT	BVIVG-U212*	7/8" -20 UNEF	12	16	9.0	38.5
	BVIDG-U217GT	BVIVG-U217*	7/8" -20 UNEF	17	20	9.0	46.5
	BVIDG-U242GT	BVIVG-U242*	1" -20 UNEF	12	16	9.0	40.5
	-	BVIVG-U243*	1" -20 UNEF	23	25	9.0	55.0
	BVIDG-U247GT	BVIVG-U247*	1" -20 UNEF	17	20	9.0	47.5
	-	BVIVG-U292*	1 3/16" -18 UNEF	12	16	9.0	40.5
	BVIDG-U293GT	BVIVG-U293*	1 3/16" -18 UNEF	23	25	9.0	55.0
	BVIDG-U297GT	BVIVG-U297*	1 3/16" -18 UNEF	17	20	9.0	47.5
	-	BVIVG-U299*	1 3/16" -18 UNEF	29	32	9.0	47.0
	-	BVIVG-U349*	1 3/8" -18 UNEF	29	32	9.0	52.0
	-	BVIVG-U352*	1 7/16" -18 UNEF	12	16	9.0	39.0
	BVIDG-U353GT	BVIVG-U353*	1 7/16" -18 UNEF	23	25	9.0	52.0
	-	BVIVG-U356*	1 7/16" -18 UNEF	36	40	9.0	63.0
	BVIDG-U357GT	BVIVG-U357*	1 7/16" -18 UNEF	17	20	9.0	46.5
	BVIDG-U359GT	BVIVG-U359*	1 7/16" -18 UNEF	29	29	9.0	52.0
	BVIDG-U433GT	BVIVG-U433*	1 3/4" -18 UNS	23	25	10.0	52.0
	BVIDG-U436GT	BVIVG-U436*	1 3/4" -18 UNS	36	40	10.0	62.5
	-	BVIVG-U437*	1 3/4" -18 UNS	17	20	10.0	46.5
	BVIDG-U439GT	BVIVG-U439*	1 3/4" -18 UNS	29	32	10.0	51.5
	-	BVIVG-U503*	2" -18 UNS	23	25	10.0	51.5
	BVIDG-U506GT	BVIVG-U506*	2" -18 UNS	36	40	10.0	62.5
	-	BVIVG-U508*	2" -18 UNS	48	50	10.0	64.5
	BVIDG-U509GT	BVIVG-U509*	2" -18 UNS	29	32	10.0	55.0
	-	BVIVG-U563*	2 1/4" -16 UN	23	25	10.0	51.0
	BVIDG-U566GT	BVIVG-U566*	2 1/4" -16 UN	36	40	10.0	62.0
	-	BVIVG-U568*	2 1/4" -16 UN	48	50	10.0	64.0
	BVIDG-U569GT	BVIVG-U569*	2 1/4" -16 UN	29	32	10.0	51.0
-	BVIVG-U628*	2 1/2" -16 UN	48	50	10.0	64.0	

Approvals



For applications in machine, vehicle and traction building industries

Suitable for MIL connector series C5015

VIDG: IP66 static/IP54 dynamic, conduit- and thread side

VIVG: IP68 static/IP67 dynamic, conduit- and thread side

No seal on female thread side


* UL Recognition according to UL 1619

^② IP68GT available. Please add "GT" after the order no.

Y, T pieces, conduit adapters

Type VY & VT

Type VY - Y piece


	Order no. IP66 ①	Order no. IP68 ① ②	1 x conduit size		2 x conduit size	
			NW	Metric	NW	Metric
	BVYD-100707GT	BVYR-100707	10	12	07	10
	BVYD-121010GT	BVYR-121010	12	16	10	12
	BVYD-171212GT	BVYR-171212	17	20	12	16
	BVYD-231717GT	BVYR-231717	23	25	17	20
	BVYD-292323GT	BVYR-292323	29	32	23	25
	BVYD-362929GT	BVYR-362929	36	40	29	32
	BVYD-483636GT	BVYR-483636	48	50	36	40

Approvals



Sizes can be adapted with AV conduit adapters to fit smaller conduit dimensions

Type VT - T piece

	Order no. IP66 ①	Order no. IP68 ① ②	3 x conduit size	
			NW	Metric
	BVTD-101010GT	BVTR-101010	10	12
	BVTD-121212GT	BVTR-121212	12	16
	BVTD-171717GT	BVTR-171717	17	20
	BVTD-232323GT	BVTR-232323	23	25
	BVTD-292929GT	BVTR-292929	29	32
	BVTD-363636GT	BVTR-363636	36	40
	BVTD-484848GT	BVTR-484848	48	50

Approvals




Sizes can be adapted with AV conduit adapters to fit smaller conduit dimensions

① Please replace "B" for black with "S" for grey in front of the order no.
 ② IP68GT available. Please add "GT" after the order no.

Y, T pieces, conduit adapters

Type AV

Type AV - Conduit adapter

	Order no. IP66, black	Order no. IP68, black	Fits to fitting for		Fits to fitting size		Overall length (mm)
			NW	Metric	NW	Metric	
AV 	-	BAVR-10/07	10	12	07	10	43.0
	BAVD-12/10GT	BAVR-12/10	12	16	10	12	46.0
	BAVD-17/10GT	BAVR-17/10	17	20	10	12	53.0
	BAVD-17/12GT	BAVR-17/12	17	20	12	16	54.0
	BAVD-23/10GT	BAVR-23/10	23	25	10	12	54.0
	BAVD-23/12GT	BAVR-23/12	23	25	12	16	53.0
	BAVD-23/17GT	BAVR-23/17	23	25	17	20	62.0
	BAVD-29/10GT	BAVR-29/10	29	32	10	12	56.5
	BAVD-29/12GT	BAVR-29/12	29	32	12	16	55.0
	BAVD-29/17GT	BAVR-29/17	29	32	17	20	61.0
	BAVD-29/23GT	BAVR-29/23	29	32	23	25	64.0
	BAVD-36/29GT	BAVR-36/29	36	40	29	32	81.0
	BAVD-48/36GT	BAVR-48/36	48	50	36	40	88.5

Approvals




Allows conduit size reduction of PMA connectors, particularly of T and Y pieces

Connections, connection splices, metric, PG

Type VNR-REM & VSG

Type VNR-REM - Connection to solid metal tube, metric/PG

	Order no. IP66 without clamp ① ②	Order no. IP68 with clamp ① ②	Fits to conduit size		Steel tube metric	Inside Ø (mm)	Overall length (mm)
			NW	Metric			
	BVNR-REM162	BVNR-REM162-24	12	16	M16	16.0	54.0
	BVNR-REM187	BVNR-REM187-28	17	20	M18	18.5	65.0
	BVNR-REM207	BVNR-REM207-28	17	20	M20	20.0	65.0
	BVNR-REM253	BVNR-REM253-32	23	25	M25	26.0	71.0
	BVNR-REM329	BVNR-REM329-44	29	32	M32	32.0	71.0
	BVNR-REM406	BVNR-REM406-50	36	40	M40	40.0	90.0
	BVNR-REM508	BVNR-REM508-65	48	50	M50	50.0	90.0

	Order no. IP66 without clamp ① ②	Order no. IP68 with clamp ① ②	Fits to conduit size		Steel tube PG	Inside Ø (mm)	Overall length (mm)
			NW	Metric			
	BVNR-RE12	BVNR-RE12-24	12	16	PG11	18.5	56.0
	BVNR-RE1317	BVNR-RE1317-28	17	20	PG13	20.4	65.0
	BVNR-RE17	BVNR-RE17-28	17	20	PG16	22.5	65.0
	BVNR-RE23	BVNR-RE23-32	23	25	PG21	28.5	71.0
	BVNR-RE29	BVNR-RE29-44	29	32	PG29	37.0	71.0
	BVNR-RE36	BVNR-RE36-50	36	40	PG36	47.0	84.0
	BVNR-RE48	BVNR-RE48-65	48	50	PG48	59.3	90.0


Quick connection of solid metal tubes with flexible PMA conduits

Jubilee clip made of galvanised bright steel

Available with or without jubilee clip

IP68 on corrugated conduit side, on tube side up to IP68 with sealant

Type VSG - Connection splice for flexible conduits

	Order no. IP66 ①	Order no. IP68 ①	Fits to conduit size		Inside Ø (mm)	Overall length (mm)
			NW	Metric		
	BVSGD-1212GT	BVSGR-1212	12	16	23.5	66.0
	BVSGD-1717GT	BVSGR-1717	17	20	29.5	87.0
	BVSGD-2323GT	BVSGR-2323	23	25	37.0	103.0
	BVSGD-2929GT	BVSGR-2929	29	32	44.0	100.0
	BVSGD-3636GT	BVSGR-3636	36	40	53.5	130.0
	BVSGD-4848GT	BVSGR-4848	48	50	66.0	133.0

Approvals



Designed for optimal connection of PMA conduits


① Please replace "B" for black with "S" for grey in front of the order no.

② IP68GT available. Please add "GT" to order no. or insert before clamp size (e.g. BVNR-REM162GT, BVNR-REM162GT-24)

PMA FIXPlus fittings with metric threads

Type UNV-M-UL & UAV-M-UL

Type UNV-M-UL - Connector straight, metric thread


	Order no. black	Order no. grey	Thread metric	Fits to conduit size NW	Thread length (mm)	Outside Ø (mm)	Overall length (mm)
	BUNV-M207-UL	SUNV-M207-UL	M20 x 1.5	17	11.0	29.5	47.5
	BUNV-M257-UL	SUNV-M257-UL	M25 x 1.5	17	12.0	32.0	48.5
	BUNV-M253-UL	SUNV-M253-UL	M25 x 1.5	23	12.0	37.0	52.0
	BUNV-M323-UL	SUNV-M323-UL	M32 x 1.5	23	15.0	43.0	55.5
	BUNV-M329-UL	SUNV-M329-UL	M32 x 1.5	29	15.0	44.0	56.0
	BUNV-M409-UL	SUNV-M409-UL	M40 x 1.5	29	19.0	49.0	60.0
	BUNV-M406-UL	SUNV-M406-UL	M40 x 1.5	36	19.0	55.0	72.5
	BUNV-M506-UL	SUNV-M506-UL	M50 x 1.5	36	19.0	59.0	72.0
	BUNV-M508-UL	SUNV-M508-UL	M50 x 1.5	48	19.0	69.0	72.5
	BUNV-M638-UL	SUNV-M638-UL	M63 x 1.5	48	19.0	75.0	72.0

Approvals



Extremely high impact resistance
 Vibration-resistant connection to PMA FLEXPlus conduits
 Easy installation
 High conduit pull-out strength
 Very good chemical properties
 Free from halogens and cadmium
 Fits conduit profile coarse (G)
 Lock nut delivered with the fitting

Type UAV-M-UL - Connector 45° elbow, metric thread

	Order no. black	Order no. grey	Thread metric	Fits to conduit size NW	Thread length (mm)	Outside Ø (mm)	Overall length (mm)	Overall height (mm)
	BUAV-M207-UL	SUAV-M207-UL	M20 x 1.5	17	11.0	29.5	55.5	51.5
	BUAV-M253-UL	SUAV-M253-UL	M25 x 1.5	23	12.0	37.0	65.0	58.5
	BUAV-M329-UL	SUAV-M329-UL	M32 x 1.5	29	15.0	44.0	73.5	66.5
	BUAV-M406-UL	SUAV-M406-UL	M40 x 1.5	36	19.0	53.5	92.5	85.5
	BUAV-M506-UL	SUAV-M506-UL	M50 x 1.5	36	19.0	53.5	92.5	89.5
	BUAV-M508-UL	SUAV-M508-UL	M50 x 1.5	48	19.0	66.0	100.0	96.0
	BUAV-M638-UL	SUAV-M638-UL	M63 x 1.5	48	19.0	66.0	100.0	104.0

Approvals



Extremely high impact resistance
 Vibration-resistant connection to PMA FLEXPlus conduits
 Easy installation
 High conduit pull-out strength
 Very good chemical properties
 Free from halogens and cadmium
 Fits conduit profile coarse (G)
 Lock nut delivered with the fitting

PMA FIXPLus fittings with metric threads

Type UWV-M-UL

Type UWV-M-UL - Connector 90° elbow, metric thread

	Order no. black	Order no. grey	Thread metric	Fits to conduit size NW	Thread length (mm)	Outside Ø (mm)	Overall length (mm)	Overall height (mm)
UNV-M-UL	BUWV-M207-UL	SUWV-M207-UL	M20 x 1.5	17	11.0	29.5	58.5	43.5
	BUWV-M253-UL	SUWV-M253-UL	M25 x 1.5	23	12.0	37.0	65.0	54.0
	BUWV-M329-UL	SUWV-M329-UL	M32 x 1.5	29	15.0	44.0	73.0	64.5
	BUWV-M406-UL	SUWV-M406-UL	M40 x 1.5	36	19.0	53.5	69.0	78.0
	BUWV-M508-UL	SUWV-M508-UL	M50 x 1.5	48	19.0	66.0	106.0	91.5



Approvals




- Extremely high impact resistance
- Vibration-resistant connection to PMA FLEXPLus conduits
- Easy installation
- High conduit pull-out strength
- Very good chemical properties
- Free from halogens and cadmium
- Fits conduit profile coarse (G)
- Lock nut delivered with the fitting

PMA FIXPlus fittings with NPT threads

Type UNV-N-UL & UAV-N-UL

Type UNV-N-UL - Connector straight, NPT thread


	Order no. black	Order no. grey	Thread size NPT	Fits to conduit size NW	Thread length (mm)	Outside Ø (mm)	Overall length (mm)
	BUNV-N027-UL	SUNV-N027-UL	½"	17	13.0	29.5	49.5
	BUNV-N043-UL	SUNV-N043-UL	¾"	23	14.0	37.0	54.0
	BUNV-N069-UL	SUNV-N069-UL	1"	29	15.0	44.0	56.0
	BUNV-N076-UL	SUNV-N076-UL	1¼"	36	18.0	55.0	71.0
	BUNV-N088-UL	SUNV-N088-UL	1½"	48	18.0	69.0	71.5
	BUNV-N098-UL	SUNV-N098-UL	2"	48	18.0	69.0	71.5

Approvals



Extremely high impact resistance
 Vibration-resistant connection to PMA FLEXPlus conduits
 Easy installation
 High conduit pull-out strength
 Very good chemical properties
 Free from halogens and cadmium
 Fits conduit profile coarse (G)
 Lock nuts available on request

Type UAV-N-UL - Connector 45° elbow, metric thread

	Order no. black	Order no. grey	Thread size NPT	Fits to conduit size NW	Thread length (mm)	Outside Ø (mm)	Overall length (mm)	Overall height (mm)
	BUAV-N027-UL	SUAV-N027-UL	½"	17	13.0	29.5	57.5	51.5
	BUAV-N043-UL	SUAV-N043-UL	¾"	23	14.0	37.0	67.0	60.0
	BUAV-N069-UL	SUAV-N069-UL	1"	29	15.0	44.0	73.5	67.0
	BUAV-N076-UL	SUAV-N076-UL	1¼"	36	18.0	53.5	91.5	85.5
	BUAV-N088-UL	SUAV-N088-UL	1½"	36	18.0	66.0	99.0	96.0
	BUAV-N098-UL	SUAV-N097-UL	2"	48	18.0	66.0	99.0	101.0

Approvals




Extremely high impact resistance
 Vibration-resistant connection to PMA FLEXPlus conduits
 Easy installation
 High conduit pull-out strength
 Very good chemical properties
 Free from halogens and cadmium
 Fits conduit profile coarse (G)
 Lock nuts available on request

PMA FIXPLus fittings with NPT threads

Type UWV-M-UL

Type UWV-M-UL - Connector 90° elbow, NPT thread

	Order no. black	Order no. grey	Thread size NPT	Fits to conduit size NW	Thread length (mm)	Outside Ø (mm)	Overall length (mm)	Overall height (mm)
UNV-N-UL	BUWV-N027-UL	SUWV-N027-UL	½"	17	13.0	29.5	58.5	45.5
	BUWV-N043-UL	SUWV-N043-UL	¾"	23	14.0	37.0	66.5	56.0
	BUWV-N069-UL	SUWV-N069-UL	1"	29	15.0	44.0	73.5	64.5
	BUWV-N076-UL	SUWV-N076-UL	1¼"	36	18.0	53.5	96.0	77.0
	BUWV-N088-UL	SUWV-N088-UL	1½"	48	18.0	66.0	106.0	90.5
	BUWV-N098-UL	SUWV-N098-UL	2"	48	18.0	66.0	111.0	90.5

Approvals



Extremely high impact resistance
 Vibration-resistant connection to PMA FLEXPLus conduits
 Easy installation
 High conduit pull-out strength
 Very good chemical properties
 Free from halogens and cadmium
 Fits conduit profile coarse (G)
 Lock nuts available on request



Special connectors

Introduction

Meeting the demands of our customers. We are always looking for ways to offer our best services.

In addition to the broad ranges of connectors offered within the PMAFIX Pro, PMAFIX and Smartline product lines, PMA offers further application specific connector solutions such as the MPNK-M series for high temperatures applications, JENQ-M series for Food and Beverage applications and the MONK-M to terminate an overbraided conduit.






Metal connectors, metric


Type MPNK & MONK

Type MPNK - Metal connector for PMA conduits, metric thread

	Order no. metal	Thread metric	Fits to conduit size NW	Fits to conduit size profile	Inside Ø min. (mm)	Thread length (mm)
	MPNK-M160	M16 x 1.5	10	T	12.0	12.0
	MPNK-M162	M16 x 1.5	12	T	12.0	12.0
	MPNK-M207	M20 x 1.5	17	T	15.8	14.0
	MPNK-M253	M25 x 1.5	23	G	19.0	15.0
	MPNK-M329	M32 x 1.5	29	G	26.5	18.0

For high temperature applications
 Suitable for high mechanical loads
 Nickel-plated brass
 Seals made from silicon
 Easy introduction of wires and cables
 Vibration-proof connection to PMAFLEX conduits
 Very good chemical properties
 IP68

Type MONK - Metal connector for overbraided conduits, metric thread

	Order no. metal	Thread metric	Fits to conduit size NW	Fits to conduit profile	Inside Ø min. (mm)	Thread length (mm)
	MONK-M162	M16 x 1.5	12	T	12.0	12.0
	MONK-M207	M20 x 1.5	17	T	16.0	14.0
	MONK-M253	M25 x 1.5	23	G	19.0	15.0
	MONK-M329	M32 x 1.5	29	G	26.5	18.0
	MONK-M406	M40 x 1.5	36	G	35.0	15.0
	MONK-M508	M50 x 1.5	48	G	45.0	16.0

For termination of overbraided conduits
 For high temperature applications and applications in areas with hot metal shavings and flying sparks
 Nickel-plated brass
 Seals made from silicon

Stainless steel liquid tight fitting

Type JENQ

Type JENQ - for overextruded conduit, IP69

	Order no.	Thread size metric	Fits to conduit size NW	Thread length (mm)	Inside Ø min. (mm)	Ø D (mm)	Wrench size (mm)	sw
JENQ	JENQ-M162-10	M16 x 1.5	12	10.0	9.2	31.9	35.9	30.0
	JENQ-M207-10	M20 x 1.5	17	10.0	13.0	35.0	36.9	32.0
	JENQ-M253-11	M25 x 1.5	23	11.0	18.3	44.5	41.6	40.0
	JENQ-M329-13	M32 x 1.5	29	13.0	24.0	55.5	48.7	50.0
	JENQ-M406-13	M40 x 1.5	36	13.0	32.4	61.5	51.2	57.0
	JENQ-M506-14	M50 x 1.5	48	14.0	42.3	78.0	57.4	74.0



Approvals



IP 69 rating
 For termination of overextruded conduits
 For high hygienic requirements
 Suitable for food & beverage industry
 Unique single piece design Stainless Steel 316L material
 Seals made from FDA compliant material
 Easy cleaning
 High thread and system connection strengths
 High resistance to chemicals and cleaning agents
 Easy assembly

Accessories

Introduction

For flexible and application friendly solutions. PMA offers a vast array of practical accessories in order to complete the PMA cable protection system.

We offer lock nuts produced from polyamide or metal, thread reducers and enlargers, conduit adapters, swivel adapters as well as different mounting clips for conduits. All these practical products will help to create the PMA line for our customers even more flexible and application friendly.






Flat gaskets, metric, PG, NPT, GAS

Type SVN4

Type SVN4 - Flat thread gasket, metric/NPT/PG/GAS

Order no.	Fits to thread metric	Inside Ø (mm)	Outside Ø (mm)	Thickness (mm)
SVN4				
SVN4-M12	M12 x 1.5	12.0	20.0	1.5
SVN4-M12/02	M12 x 1.5	12.0	23.0	1.5
SVN4-M16	M16 x 1.5	16.0	22.0	1.5
SVN4-M16/02	M16 x 1.5	16.0	25.0	1.5
SVN4-M20	M20 x 1.5	20.0	27.0	1.5
SVN4-M20/02	M20 x 1.5	20.0	33.0	1.5
SVN4-M25	M25 x 1.5	25.0	35.0	1.5
SVN4-M25/01	M25 x 1.5	25.0	31.0	1.5
SVN4-M25/02	M25 x 1.5	25.0	39.0	1.5
SVN4-M32	M32 x 1.5	32.0	43.0	1.5
SVN4-M32/02	M32 x 1.5	32.0	49.0	1.5
SVN4-M40	M40 x 1.5	40.0	55.0	1.5
SVN4-M40/01	M40 x 1.5	40.0	51.0	1.5
SVN4-M40/02	M40 x 1.5	40.0	64.0	1.5
SVN4-M50	M50 x 1.5	50.0	69.0	1.5
SVN4-M50/01	M50 x 1.5	50.0	59.0	1.5
SVN4-M50/02	M50 x 1.5	50.0	74.0	1.5
SVN4-M63	M63 x 1.5	63.0	75.0	1.5



Order no.	Fits to thread PG	Inside Ø (mm)	Outside Ø (mm)	Thickness (mm)
SVN4-07	07	12.5	16.5	1.5
SVN4-09	07	15.2	20.0	1.5
SVN4-11	11	18.6	24.0	1.5
SVN4-13	13.5	20.4	31.0	1.5
SVN4-16	16	22.5	31.0	1.5
SVN4-21	21	28.3	37.0	1.5
SVN4-29	29	37.0	48.0	1.5
SVN4-36	36	47.0	57.0	1.5
SVN4-42	42	54.0	60.0	1.5
SVN4-48	48	59.3	69.0	1.5

Order no.	Fits to thread PG	Inside Ø (mm)	Outside Ø (mm)	Thickness (mm)
SVN4-N02/01	½"	28.0	21.6	1.5
SVN4-N04/01	¾"	36.0	27.0	1.5
SVN4-N06/01	1"	46.0	33.7	1.5
SVN4-N07/01	1¼"	55.0	42.5	1.5
SVN4-N08/01	1½"	70.0	48.6	1.5
SVN4-N09/01	2"	70.0	60.7	1.5

Order no.	Fits to thread GAS	Inside Ø (mm)	Outside Ø (mm)	Thickness (mm)
SVN4-G00	¼"	13.2	20.0	1.5
SVN4-G01	⅜"	16.7	22.0	1.5
SVN4-G02	½"	21.0	28.0	1.5
SVN4-G04	¾"	26.5	34.0	1.5
SVN4-G06	1"	33.3	42.0	1.5
SVN4-G07	1¼"	41.9	53.0	1.5
SVN4-G08	1½"	47.8	62.0	1.5
SVN4-G09	2"	59.6	69.0	1.5

For sealing of polyamide or metal threads of PMA fittings. For ingress protection at the thread up to IP68

For solid sealing of uneven rough contact areas around the thread hole or when no constructive measures for O-Rings are provided


NBR reinforced with aramide fibres (asbestos-free). Temperature range: -50°C to +200°C, short-term to +350°C

Note: Depending on flange sizes flat thread gaskets can have different widths. Please indicate fitting for which gasket is needed for replacement orders

Locking clips, water impact protection


Type AFN2, OVN2 & WPS

Type AFN2 - Universal safety clip

	Order no. dark grey	Fits to conduit size		Width (mm)	Length (mm)	Thickness (mm)
		NW	Profile			
	AFN2-07GT	07	G + T	14.0	14.0	7.0
	AFN2-10GT	10	G + T	17.5	17.0	8.0
	AFN2-12GT	12	G + T	20.5	20.0	7.3
	AFN2-17GT	17	G + T	26.5	22.0	8.0
	AFN2-23GT	23	G + T	34.0	27.5	11.8
	AFN2-29GT	29	G + T	40.5	32.0	11.8
	AFN2-36GT	36	G + T	50.0	39.0	9.5
	AFN2-48GT	48	G + T	62.0	47.0	9.5


Pre-installed in PMA connectors IP66 and IP68GT
Allows simple push-in assembly of PMA conduits

Type OVN2 - Oval clip

	Order no. dark grey	Fits to conduit size		Width (mm)	Length (mm)	Thickness (mm)
		NW	Profile			
	OVN2-07	07	G + T	14.0	14.0	6.0
	OVN2-10	10	G + T	17.5	17.0	7.0
	OVN2-12	12	G + T	21.0	19.0	6.0
	OVN2-17	17	G + T	26.5	22.5	7.0
	OVN2-23	23	G + T	34.0	27.5	10.5
	OVN2-29	29	G + T	40.5	32.0	10.5
	OVN2-36	36	G + T	49.5	39.0	8.5
	OVN2-48	48	G + T	62.0	47.0	8.5

Provides reliable fixation of PMA conduits within PMA IP68 fittings

Type WPS - Water impact protection

	Order no. black	Fits to conduit size		Outside Ø (mm)	Thickness (mm)
		NW	Profile		
	WPS-NW10	10	G + T	22.0	8.0
	WPS-NW12	12	G + T	26.0	8.0
	WPS-NW17	17	G + T	33.0	8.0
	WPS-NW23	23	G + T	40.0	9.0
	WPS-NW29	29	G + T	47.0	9.5
	WPS-NW36	36	G + T	59.0	10.0
	WPS-NW48	48	G + T	71.0	10.0

Increased protection of PMAFIX fittings against water jet impact – increased protection up to IP69

For increased ingress protection requirements regarding high pressure/steam jet cleaning

Based on PMAFIX IP68 system


Two-piece water impact protection with click cap

Retrofit installation possible

Sealing caps

Type NVN3, NFN3 & NR

Type NVN3 - Sealing cap, reinforced

	Order no.	Fits to conduit size		Length (mm)
		NW	Metric	
	NVN3-07	07	10	9.0
	NVN3-09	10	12	9.0
	NVN3-11	12	16	12.0
	NVN3-16	17	23	16.5
	NVN3-21	23	25	13.0
	NVN3-29	29	32	14.0
	NVN3-36	36	40	17.5
	NVN3-48	48	50	17.5

In connection with PMAFIX connectors ("V" series) and PMA corrugated conduits

For ingress protection IP68 static/IP67 dynamic


Specially modified polyesterelastomer

Free from halogens and cadmium

Fits both conduit profiles: fine (T) and coarse (G)

Temperature range: -40°C to +105°C

Type NFN3 - Sealing cap

	Order no.	Fits to conduit size		Length (mm)
		NW	Profile	
	NFN3-07	07	10	9.0
	NFN3-09	10	12	9.0
	NFN3-11	12	16	9.0
	NFN3-16	17	23	9.0
	NFN3-21	23	25	9.0
	NFN3-29	29	32	9.0
	NFN3-36	36	40	11.0
	NFN3-48	48	50	11.0

In connection with PMAFIX connectors ("F" series) and PMA corrugated conduits

For ingress protection IP67 static/IP65 dynamic


Specially modified polyesterelastomer

Free from halogens and cadmium

Fits conduit profiles: fine (T) and coarse (G)

Temperature range: -40°C to +105°C

Type KNH2 - PMAFIX Pro sealing and locking element

	Order no.	Fits to conduit size		Outside Ø (mm)	Overall length (mm)
		NW	Metric		
	KNH2-NW10	10	12	22.0	28.0
	KNH2-NW12	12	16	25.5	33.5
	KNH2-NW17	17	20	31.5	38.5
	KNH2-NW23	23	25	38.5	41.0
	KNH2-NW29	29	32	46.5	46.5
	KNH2-NW36	36	40	55.5	50.5
	KNH2-NW48	48	50	68.0	56.5

For use in connection with PMAFIX PRO connectors PMA corrugated conduits for ingress protection IP68 and IP69 static and dynamic

Specially modified PA6/Polyester-elastomer

Free from halogens and cadmium


Fits conduit profiles: fine (T) and coarse (G)

Temperature range: -40°C to +105°C

Enlargers, reducers, metric and PG


Type ME, MR & NR

Type ME - Enlarger, brass, metric thread

	Order no.	Thread outside		Thread inside		Wrench size (mm)	Inside Ø (mm)	Overall length (mm)
		Metric	Length (mm)	Metric	Length (mm)			
	M12M16M	M12 x 1.5	5.0	M16 x 1.5	7.0	18	8.0	16.0
	M16M20M	M16 x 1.5	5.0	M20 x 1.5	7.5	22	12.0	16.5
	M20M25M	M20 x 1.5	6.0	M25 x 1.5	8.0	27	15.0	18.5
	M25M32M	M25 x 1.5	7.0	M32 x 1.5	9.0	34	21.0	20.5
	M32M40M	M32 x 1.5	8.0	M40 x 1.5	10	42	26.0	23.5
	M40M50M	M40 x 1.5	8.0	M50 x 1.5	13	52	34.0	30.0
	M50M63M	M50 x 1.5	9.0	M63 x 1.5	16	65	44.0	32.5


For enlargement of an existing thread
 Nickel-plated brass
 Hexagonal form
 Temperature range: -60°C to +200°C

Type MR - Reducer, brass, metric thread

	Order no. standard	Order no. hexagonal	Thread outside metric	Thread inside metric
	M16M12M	M16M12M/6	M16 x 1.5	M12 x 1.5
	M20M12M	M20M12M/6	M20 x 1.5	M12 x 1.5
	M20M16M	M20M16M/6	M20 x 1.5	M16 x 1.5
	M25M16M	M25M16M/6	M25 x 1.5	M16 x 1.5
	M25M20M	M25M20M/6	M25 x 1.5	M20 x 1.5
	M32M20M	M32M20M/6	M32 x 1.5	M20 x 1.5
	M32M25M	M32M25M/6	M32 x 1.5	M25 x 1.5
	M40M25M	M40M25M/6	M40 x 1.5	M25 x 1.5
	M40M32M	M40M32M/6	M40 x 1.5	M32 x 1.5
	M50M32M	M50M32M/6	M50 x 1.5	M32 x 1.5
	M50M40M	M50M40M/6	M50 x 1.5	M40 x 1.5
	M63M40M	M63M40M/6	M63 x 1.5	M40 x 1.5
	M63M50M	M63M50M/6	M63 x 1.5	M50 x 1.5

Reduction of threaded or clearance holes to smaller thread sizes
 Nickel-plated brass
 Temperature range: -60°C to +200°C
 Round form without O-ring, XXXX/6 hexagonal form with O-ring

Type NR - Reducer, PG


	Order no.	Thread outside PG	Thread inside PG	Length (mm)	Inside Ø (mm)	Outside Ø (mm)
	1109N	11	09	22.5	10.5	24.5
	1309N	13.5	09	15.0	10.0	26.0
	1311N	13.5	11	24.0	11.5	26.0
	1609N	16	09	16.0	10.0	29.0
	1611N	16	11	16.0	11.5	29.0
	1613N	16	13.5	27.0	13.5	29.0
	2113N	21	13.5	16.0	13.5	35.5
	2116N	21	16	16.0	15.5	35.5
	2921N	29	21	17.0	22.0	43.0
	3629N	36	29	24.0	30.5	54.0

Reduction of threaded or clearance holes to smaller PG thread sizes
 High-grade, glass fibre reinforced Polyamid 6
 Temperature range: -30°C to +100°C

Enlargers, reducers, PG


Type ME & MR

Type ME - Enlarger, brass, PG thread

	Order no. metal, standard	Thread outside		Thread inside		Outside Ø (mm)	Overall length (mm)
		PG	Length (mm)	PG	Length (mm)		
	0709M	07	5.0	09	07	17.0	15.0
	0911M	09	6.0	11	07	20.0	16.5
	0913M	09	6.0	13	7.5	22.0	17.5
	1113M	11	6.0	13	08	22.0	17.5
	1116M	11	6.5	16	8.5	24.0	19.0
	1121M	11	6.5	21	10	30.0	21.0
	1316M	13.5	6.5	16	7.5	24.0	19.0
	1321M	13.5	6.5	21	8.5	30.0	21.0
	1621M	16	6.5	21	8.5	30.0	21.0
	1629M	16	6.5	29	11	39.0	22.5
	2129M	21	7.0	29	11.5	39.0	23.0
	2936M	29	8.0	36	12	50.0	27.5
	4248M	42	10.0	48	17	64.0	33.0

For enlargement of an existing thread
 Nickel-plated brass
 Temperature range: -60°C to +200°C

Type MR - Reducer, brass, PG thread


	Order no. metal, standard	Thread outside		Thread inside PG	Outside Ø (mm)	Overall length (mm)
		PG	Length (mm)			
	0907M	09	6.0	07	17.0	8.5
	1107M	11	6.0	07	20.0	8.5
	1109M	11	6.0	09	20.0	8.5
	1307M	13.5	6.5	07	22.0	9.0
	1309M	13.5	6.5	09	22.0	9.0
	1311M	13.5	6.5	11	22.0	9.0
	1607M	16	6.5	07	24.0	9.5
	1609M	16	6.5	09	24.0	9.5
	1611M	16	6.5	11	24.0	9.5
	1613M	16	6.5	13.5	24.0	9.5
	2111M	21	7.0	11	30.0	10.0
	2113M	21	7.0	13.5	30.0	10.0
	2116M	21	7.0	16	30.0	10.0
	2916M	29	8.0	16	39.0	11.5
	2921M	29	8.0	21	39.0	11.5
	3621M	36	9.0	21	50.0	12.5
	3629M	36	9.0	29	50.0	12.5
	4229M	42	10	29	57.0	14.0
	4236M	42	10	36	57.0	14.0
	4836M	48	10	36	64.0	14.0
4842M	48	10	42	64.0	14.0	

Reduction of threaded or clearance holes to smaller thread sizes
 Nickel-plated brass
 Temperature range: -60°C to +200°C

Plug screws, metric, PG

Type 514

Type 514 - Plug screw, metric/PG thread


	Order no. grey	Fits to thread metric	Outside Ø (mm)	Height (mm)	Thread length (mm)
	514-M12	M12 x 1.5	15.0	10.0	6.0
	514-M16	M16 x 1.5	20.0	10.5	6.0
	514-M20	M20 x 1.5	24.0	10.5	6.0
	514-M25	M25 x 1.5	30.0	13.0	8.0
	514-M32	M32 x 1.5	37.0	13.5	8.0
	514-M40	M40 x 1.5	46.0	14.0	8.0
	514-M50	M50 x 1.5	56.0	16.5	10.0
	514-M63	M63 x 1.5	70.0	17.0	12.0
	Order no. grey	Fits to thread PG	Outside Ø (mm)	Height (mm)	Thread length (mm)
	514-07	07	15.0	10.0	6.0
	514-09	09	19.0	10.0	6.0
	514-11	11	22.0	10.0	6.0
	514-13	13.5	25.0	10.0	6.0
	514-16	16	27.0	10.0	6.0
	514-21	21	33.0	12.5	8.0
	514-29	29	44.5	13.0	8.0
	514-36	36	55.5	15.0	10.0
	514-48	48	69.5	17.0	12.0

For closing off unused threaded holes
 Polyamide 6 glass fibre reinforced
 Free from halogens and cadmium
 IP54
 Temperature range: -30°C to +100°C

Lock nuts, metric, PG

Type MN

Type MN - Hexagonal lock nut, polyamide, metric/PG thread


	Order no. black	Order no. grey	Fits to thread metric	Wrench size (mm)	Height (mm)
	BMN-M12	GMN-M12	M12 x 1.5	17	5.0
	BMN-M16	GMN-M16	M16 x 1.5	22	5.0
	BMN-M20	GMN-M20	M20 x 1.5	26	5.6
	BMN-M25	GMN-M25	M25 x 1.5	32	6.0
	BMN-M32	GMN-M32	M32 x 1.5	41	7.0
	BMN-M40	GMN-M40	M40 x 1.5	50	7.0
	BMN-M50	GMN-M50	M50 x 1.5	60	8.0
	BMN-M63	GMN-M63	M63 x 1.5	75	8.0
	Order no. black	Order no. grey	Fits to thread PG	Wrench size (mm)	Height (mm)
	BMN-07	GMN-07	07	19	5.0
	BMN-09	GMN-09	09	22	5.0
	BMN-11	GMN-11	11	24	5.0
	BMN-13	GMN-13	13.5	27	6.0
	BMN-16	GMN-16	16	30	6.0
	BMN-21	GMN-21	21	36	7.0
	BMN-29	GMN-29	29	46	7.0
	BMN-36	GMN-36	36	60	8.0
	BMN-48	GMN-48	48	70	8.0

Glass fibre reinforced Polyamid 6
High tightening torques

Lock nuts, metric, PG

Type MM

Type MM - Hexagonal lock nut, brass, metric/PG thread

	Order no.	Fits to thread metric	Wrench size (mm)	Height (mm)
	GMM-M12	M12 x 1.5	15	2.8
	GMM-M16	M16 x 1.5	19	2.8
	GMM-M20	M20 x 1.5	24	3.0
	GMM-M25	M25 x 1.5	30	3.5
	GMM-M32	M32 x 1.5	36	4.0
	GMM-M40	M40 x 1.5	46	4.5
	GMM-M50	M50 x 1.5	60	5.0
	GMM-M63	M63 x 1.5	70	5.5
	Order no.	Fits to thread PG	Wrench size (mm)	Height (mm)
	GMM-07	07	15	2.8
	GMM-09	09	18	2.8
	GMM-11	11	21	3.0
	GMM-13	13.5	23	3.0
	GMM-16	16	26	3.0
	GMM-21	21	32	3.5
	GMM-29	29	41	4.0
	GMM-36	36	51	5.0
	GMM-42	42	60	5.0
	GMM-48	48	64	5.5

Nickel-plated brass

Maximum possible torque

Safe system connection

PMA TRUST™


Modular support system

For use in rolling stock applications.
The most versatile, compact and lightest design of its kind on the market.

PMA® TRUST™ modular support system is a lightweight, compact solution with high impact resistance. Thanks to the new design, external dimensions are reduced to the very minimum and internal spacing between adjoining conduits is very small. The system is specifically designed for use in railway vehicle construction and other applications where fixation of parallel running conduits and cables is required.



Type BGPMK - PMA TRUST™ cable clamping adapter


	Order no. black	Clamping range		Fits to multiple holder BGPM & reduction BGPMR (NW)	Nom. dimensions A (mm)	Weight kg/100 pcs	Packing unit/pcs
		1 fold BGPM & BGMPR	2, 3 & 4 fold BGPM & BGMPR*				
	BGPMK-10/7-3	7-3	6-4	10	30.0	0.3	5
	BGPMK-12/9-5	9-5	8-6	12	30.0	0.3	5
	BGPMK-17/15-11	15-11	14-12	17	30.0	0.5	5
	BGPMK-17/12-8	12-8	11-9	17	30.0	0.6	5
	BGPMK-23/20-16	20-16	19-17	23	30.0	0.9	5
	BGPMK-23/18-14	18-14	17-15	23	30.0	1.0	5
	BGPMK-29/25-21	25-21	24-22	29	30.0	1.3	5
	BGPMK-29/22-18	22-18	21-19	29	30.0	1.4	5
	BGPMK-36/34-30	34-30	33-31	36	30.0	1.5	5
	BGPMK-36/31-27	31-27	30-28	36	30.0	1.7	5
	BGPMK-36/28-24	28-24	27-25	36	30.0	1.9	5
	BGPMK-48/46-42	46-42	45-43	48	30.0	2.1	5
	BGPMK-48/43-39	43-39	42-40	48	30.0	2.4	5
	BGPMK-48/40-36	40-36	39-37	48	30.0	2.7	5
	BGPMK-48/37-33	37-33	36-34	48	30.0	2.9	5

*We recommend to use cable with the slight reduced clamping range to ensure both optimum cable clamping as well as pre-assembly
Cable clamping adapters for BGPM Multiple Holders and BGPMR reduction half-shells for supporting and holding cables
Provides axial strain relief for cables
Flexible configuration in multiple holders & reductions possible
Easy installation

PMA TRUST™ modular support system

Type BGPM, BGPMR & BGPMK

Type BGPM - PMA TRUST™ modular support system

	Order no. black	Conduit profile T/G	Conduit size NW	No. of conduits	Nom. dimensions (mm)			Weight kg/100 pcs	Packing unit/pcs
					Length	Depth	Height		
	BGPM-1x10	T	10	1	39.5	30.0	24.5	1.7	10
	BGPM-1x12	T	12	1	42.5	30.0	28.0	2.0	10
	BGPM-2x12	T	12	2	61.0	30.0	28.0	2.7	10
	BGPM-3x12	T	12	3	79.5	30.0	28.0	3.3	5
	BGPM-4x12	T	12	4	98.0	30.0	28.0	4.0	5
	BGPM-1x17	T/G	17	1	48.0	30.0	33.0	2.7	10
	BGPM-2x17	T/G	17	2	72.5	30.0	33.0	3.6	10
	BGPM-3x17	T/G	17	3	97.0	30.0	33.0	4.5	5
	BGPM-4x17	T/G	17	4	121.5	30.0	33.0	5.7	5
	BGPM-1x23	T/G	23	1	55.0	30.0	40.0	3.3	10
	BGPM-2x23	T/G	23	2	87.0	30.0	40.0	4.6	10
	BGPM-3x23	T/G	23	3	119.0	30.0	40.0	5.7	5
	BGPM-4x23	T/G	23	4	151.0	30.0	40.0	7.2	5
	BGPM-1x29	T/G	29	1	61.0	30.0	46.0	4.0	10
	BGPM-2x29	T/G	29	2	99.5	30.0	46.0	5.5	10
	BGPM-3x29	T/G	29	3	137.5	30.0	46.0	7.0	5
	BGPM-4x29	T/G	29	4	176.0	30.0	46.0	9.0	5
	BGPM-1x36	T/G	36	1	70.0	30.0	55.0	5.4	10
	BGPM-2x36	T/G	36	2	116.5	30.0	55.0	7.6	10
	BGPM-3x36	T/G	36	3	163.0	30.0	55.0	9.9	5
	BGPM-4x36	T/G	36	4	209.5	30.0	55.0	12.4	5
	BGPM-1x48	T/G	48	1	82.0	30.0	66.0	6.9	10
	BGPM-2x48	T/G	48	1	141.0	30.0	66.0	10.5	10
	BGPM-3x48	T/G	48	3	199.5	30.0	66.0	13.4	5
BGPM-4x48	T/G	48	4	258.5	30.0	66.0	17.1	5	

For applications in rail vehicle construction and other applications where fixation of parallel running conduits and cables is required

Light weight and compact design

Conduit rotation possible preventing torsion

Axial fixation of conduit and/or cables

Quick installation, possible with one hand

Type BGPMR - PMA TRUST™ reducers

	Order no. black	Conduit profile T/G	Conduit size NW	Fits to multiple holder BGPM (NW)	Fits to reduction BGPMR	Nom. dimensions A (mm)	Weight kg/100 pcs	Packing unit/pcs
	BGPMR-12T/17	T	12	17	17	30.0	0.4	5
	BGPMR-17GT/23	T/G	17	23	23	30.0	0.7	5
	BGPMR-23GT/29	T/G	23	29	29	30.0	0.7	5
	BGPMR-29GT/36	T/G	29	36	36	30.0	1.2	5
	BGPMR-36GT/48	T/G	36	48	-	30.0	2.0	5

Reducers for BGPM modular system support for downsizing corrugated conduits

Provides axial strain relief for conduits, but allows rotation


Combination of multiple reductions possible

Easy installation

System supports, half-shells


Type VH & GN

Type VH - System support

	Order no. support ①	Order no. clip ①	Order no. complete ①	Fits to conduit size		Width x Height x Depth (mm)	Fixing screws
				NW	Metric		
	BVH-17-010	BVH-17-020	BVH-17-000	17	20	35 x 36 x 36	6 x M5
	BVH-23-010	BVH-23-020	BVH-23-000	23	25	35 x 44 x 36	6 x M5
	BVH-29-010	BVH-29-020	BVH-29-000	29	32	46 x 52 x 40	6 x M5
	BVH-36-010	BVH-36-020	BVH-36-000	36	40	53 x 58 x 60	6 x M5
	BVH-48-010	BVH-48-020	BVH-48-000	48	50	66 x 72 x 60	6 x M5

For applications in machine building and installation
 Optimal axial strain relief due to integrated rib
 Variable fixation possible due to six holes, safe against turning
 With safety lid suitable for overhead installation
 High retention forces
 PA 6

Type GN - Half shell

	Order no. fine profile, black	Order no. coarse profile, black	Fits to conduit size		Outside Ø (mm)	Width (mm)
			NW	Metric		
	BGN-S12T	–	12	16	26.5	34.0
	BGN-S17T	BGN-S17G	17	20	32.0	34.0
	BGN-S23T	BGN-S23G	23	25	39.5	34.0
	BGN-S29T	BGN-S29G	29	32	47.0	34.0
	BGN-S36T	–	36	40	55.0	36.5
	–	BGN-S36G	36	40	55.0	34.0
	BGN-S48T	–	48	50	66.5	36.5
	–	BGN-S48G	48	50	66.5	34.0
	–	BGN-S70G	70	80	93.5	38.0


For conduit fixation in conjunction with beam systems, particularly in traction and machine applications
 Fixes conduit against axial movements
 Allows radial turning of conduit
 Especially suitable for dynamic applications due to rounded edges
 PA 6

① Please replace “B” for black with “S”
 for grey in front of the order no.

System supports, rails for system supports

Type FH-0 & FHS

Type FH-0 - System support, one-piece

	Order no. black	Order no. grey	Fits to conduit size		Width x Height x Depth (mm)	Fixing screws
			NW	Metric		
	BFH-07-0	SFH-07-0	07	10	17.0 x 21.5 x 20.0	1 x M4
	BFH-10-0	SFH-10-0	10	12	20.5 x 24.5 x 20.0	1 x M5
	BFH-12-0	SFH-12-0	12	16	24.0 x 27.0 x 20.0	1 x M5
	BFH-17-0	SFH-17-0	17	20	30.0 x 34.0 x 20.0	1 x M6
	BFH-23-0	SFH-23-0	23	25	38.5 x 42.0 x 20.0	1 x M6
	BFH-29-0	SFH-29-0	29	32	45.5 x 48.0 x 20.0	1 x M6
	BFH-36-0	SFH-36-0	36	40	55.5 x 56.0 x 20.0	1 x M6
	BFH-48-0	SFH-48-0	48	50	67.5 x 68.0 x 20.0	1 x M6

For applications in machine building and installation
 Optimal axial strain relief due to integrated rib
 Suitable for overhead installations due to safety lid
 High retention forces
 Quick mounting due to single hole fixing
 Fits to rail for system support FHS
 PA 6

Type FHS - Rail for system support

	Order no. black	Order no. grey	Fits to system supports	Length x Height x Depth (mm)
FHS	BFHS-00	SFHS-00	FH-NW-0	275.0 x 15.5 x 25.0
	Additional position supports or distance spacers			
	BFHS-PH	SFHS-PH	Position support with screws	
	BFHS-PH1	SFHS-PH1	Distance spacers	




For flexible assembly of one-piece system supports and/or fixation of various conduit sizes
 Glass fibre reinforced polyamide 6
 Extremely robust construction
 High stiffness
 Positioning and distance spacers available
 Glass fibre reinforced PA6

Tube clamps


Type GL & GH

Type GL - Tube clamp, one-piece

	Order no. black	Order no. grey	Fits to conduit size		Width (mm)	Fixing screws
			NW	Metric		
	BGL-07	SGL-07	07	10	25.0	1 x M4
	BGL-10	SGL-10	10	12	27.0	1 x M4
	BGL-12	SGL-12	12	16	31.0	1 x M4
	BGL-17	SGL-17	17	20	39.5	1 x M5
	BGL-23	SGL-23	23	25	49.0	1 x M5
	BGL-29	SGL-29	29	32	57.0	1 x M6

Used in general machine and installation applications
 Integrated rib provides axial strain relief
 Allows turning of the conduit, thus avoiding torsion stresses
 Pre-fixation on the conduit possible
 PA 6

Type GH - Tube clamp, one-piece


	Order no. black	Order no. grey	Thread outside		Width (mm)	Fixing screws
			NW	Metric		
	BGH-23	SGH-23	23	25	16.0	2 x M5
	BGH-29	SGH-29	29	32	19.0	2 x M6
	BGH-36	SGH-36	36	40	24.0	2 x M6
	BGH-48	SGH-48	48	50	24.0	2 x M6
	BGH-56	SGH-56	56	68	26.0	2 x M8
	BGH-70	SGH-70	70	80	30.0	2 x M8
	BGH-95	SGH-95	95	106	30.0	2 x M8

Used in general machine and installation applications
 Integrated rib provides axial strain relief
 Allows turning of the conduit, thus avoiding torsion stresses
 Pre-fixation on the conduit possible
 Allows solid fixation with 2 screws
 PA 6

Tube clamps


Type SGB & SGS

Type SGB - Tube clamp

	Order no. black	Fits to conduit size		Width (mm)	Fixing screws
		NW	Metric		
	SGB-07	07	10	13.0	1 x M4
	SGB-09	10	12	13.0	1 x M4
	SGB-11	12	16	13.0	1 x M4
	SGB-16	17	20	16.0	1 x M5
	SGB-21	23	25	16.0	1 x M5
	SGB-29	29	32	19.0	1 x M6
	SGB-36	36	40	19.0	1 x M6
	SGB-48	48	50	19.0	1 x M6

For fixation of static conduits
Galvanized steel
Elastomer profile (EPDM) free from halogens
Smooth connection to PMA conduits
Good resistance to ozone and ageing
Temperature range: -40°C to +120°C

Type SGS - Tube clamp


	Order no. black	Fits to conduit size		Width x Height x Depth (mm)	Fixing screws
		NW	Metric		
	SGS-36	36	40	80.0 x 48.0 x 19.0	2 x M6
	SGS-48	48	50	94.0 x 58.0 x 19.0	2 x M6
	SGS-56	56	68	118.0 x 72.0 x 24.0	2 x M8
	SGS-70	70	80	130.0 x 85.0 x 24.0	2 x M8
	SGS-95	95	106	156.0 x 110.0 x 24.0	2 x M8
	SGS-125	125	146	200.0 x 152.0 x 24.0	2 x M8

For fixation of static conduits
Galvanized steel
Elastomer profile (EPDM) free from halogens
Smooth connection to PMA conduits
Good resistance to ozone and ageing
Temperature range: -40°C to +120°C
Galvanized steel/EPDM

System supports

Type GPS, GP & BGP-3x48

Type GPS - System support, one-piece, stackable

	Order no.	Fits to conduit size			Width (mm)	Height (mm)	Depth (mm)
		NW	Metric	DIN-NW			
	BGPS-12/01*	12	16	2	70.0	51.0	30.0
	BGPS-17	17	20	2	70.0	51.0	30.0
	BGPS-23	23	25	2	70.0	51.0	30.0
	BGPS-29	29	32	3	85.0	65.0	30.0
	BGPS-36	36	40	3	85.0	65.0	30.0
	BGPS-48	48	50	4	115.0	92.5	30.0
	BGPS-56	56	68	4	115.0	92.5	30.0

*This size will be delivered with a half-shell insert

In railway vehicle construction, heavy machine building industry and other applications with increased mechanical requirements

Heavy design, high retention forces. Applicable with standard metal C rails

Clasp for easy pre-mounting and final assembly. Especially suitable for dyn. applic. due to rounded edges


The following nominal widths can be combined for stacking: NW 12 with NW 17 + 23, NW 17 with NW 23,

NW 29 with NW 36, NW 48 with NW 56

Content of delivery: System support and 2 screws for securing of the lid (optional); without mounting accessories

PA 6

Type GP - System support, stackable

	Order no. ①	Thread outside		Width (mm)	Height (mm)	Depth (mm)
		NW	Metric			
	BGP-12/01*	12	16	48.0	66.0	36.0
	BGP-17	17	20	48.0	66.0	36.0
	BGP-23	23	25	48.0	66.0	36.0
	BGP-29	29	32	62.0	66.0	36.0
	BGP-36	36	40	62.0	66.0	36.0
	BGP-48	48	50	76.0	66.0	36.0
	BGP-56G	56	68	87.0	78.0	36.0

*This size will be delivered with a half-shell insert

In railway vehicle construction, heavy machine building industry and other applications with increased mechanical requirements

Variable stacking possibilities, due to the "Block"-system a high rigidity is guaranteed


Fixes conduit against axial movements. Allows radial turning of conduit

Especially suitable for dyn. applic. due to rounded edges. Variety of support possibilities

Content of delivery: System support with assembling screws; without mounting accessories

PA 6

Type BGP-3x48- Multiple system support

	Order no.	Thread outside			Width (mm)	Height (mm)	Length (mm)
		NW	Metric	Profile			
	BGP-3x48	48	50	G and T	30.0	84.0	214.0

In railway vehicle construction, heavy machine building industry and other applications with increased mechanical requirements

Multiple system support for 3 x NW48 max. conduits

Axial fixation of conduit. Conduit rotation possible (avoids torsion)

Especially suitable for dynamic applications due to rounded edges


PA 6

① Please replace "B" for black with "S" for grey in front of the order no.

Conduit terminations


Type RKS & CT

Type RKS - Conduit terminal sleeve

	Order no. black	Fits to conduit size		Inside Ø (mm)	Outside Ø (mm)	Length (mm)
		NW	Metric			
	RKS-07	07	10	4.5	12.5	16.0
	RKS-10	10	12	8.0	15.5	16.0
	RKS-12	12	16	10.0	19.0	20.0
	RKS-17	17	20	13.0	24.0	21.0
	RKS-23	23	25	20.0	32.0	22.0
	RKS-29	29	32	25.0	38.0	22.0
	RKS-36	36	40	33.0	46.0	25.0
	RKS-48	48	50	45.0	58.0	25.0
	RKS-56	56	68	54.0	71.0	28.0

For clean conduit end termination where no fitting is required
PA 6

Type CT - Conduit termination


	Order no. black	Fits to conduit size		Clamping range (mm)	Length (mm)	Height (mm)
		NW	Metric			
	BCT-10	10	12	4-8	28.0	13.0
	BCT-12	12	16	5-9	35.0	16.0
	BCT-17	17	20	7-14	42.0	21.0
	BCT-23	23	25	14-22	51.0	28.0
	BCT-29	29	32	16-22	53.0	34.0
	BCT-36	36	40	16-29	55.0	42.0

For sealing of cables and wires at the exit from PMA corrugated conduits
Avoids ingress of dirt and liquids
Can be fixed additionally with cable ties
Neoprene rubber
Temperature range: -30°C to +120°C

Abrasion protection sleeves, tools

Type SS/SV & EWZ

Type SS/SV - Abrasion protection sleeve

	Order no.	Fits to conduit size		Outside Ø (mm)	Length (mm)
		NW	Metric		
	BSS-17	17	20	42.0	22.0
	BSS-23	23	25	49.0	26.0
	BSS-29	29	32	55.0	26.0
	BSS-36	36	40	63.0	30.0
	BSS-48	48	50	75.0	30.0
	BSS-56G	56	68	90.0	33.0
	BSV-70G	70	80	108.0	60.0

Abrasion protection for corrugated conduits in positions exposed to chafing
Increases the life time of moving conduits
PA 6

Type EWZ - Draw-in tool

	Order no. black with hole	Order no. black with handle	Fits to conduit size NW	Width x Length x Depth (mm)
EWZ	EWZ-02	EWZ-03	7.5–34	117.7 x 45.2 x 71.9



Suitable for drawing in cables or wires into PMA Divisible System conduits or other slit conduits
Designed in a handy shape and equipped with a practical hand grip for wedging or with hole for direct holding of the wires
Polyamide 6.6
Colour: black

Tools

Type PMACUT

Type PMACUT - Cutting tool for conduits, NW 07–48

	Order no. Cutting tool	Order no. Spare blade	Cutting range	For conduit size NW
PMACUT	PMACUT-38	FP-38	0–38	07–29
	PMACUT-52	FP-52	0–52	23–48



Can be used to cut all PMA conduits
Enables a precise and straight cut around the corrugation
Metal
Colour: Red

Type PMACUT - Cutting tool for conduits, NW 56–125

PMACUT	Order no. black	Fits to conduit size		Length x Width x Depth (mm)
		NW	Metric	
	PMACUT-NW56	56	68	337 x 101 x 15
	PMACUT-NW70	70	80	350 x 110 x 15
	PMACUT-NW95	95	106	400 x 142 x 20
	PMACUT-NW125	125	146	443 x 182 x 20




Can be used to cut all PMA conduits with large nominal widths
Enables a precise and straight cut at the top of the corrugation
High level of safety through retractable blade
Aluminium

Elbow adapters, metric

Type MAVI & MAVIK

Type MAVI - Special 45° elbow adapter, metric thread

	Order no.	Thread metric		Thread length outside (mm)	Outside Ø (mm)	Overall length (mm)
		Inside	Outside			
	MAVI-M20/01	M20 x 1.5	M20 x 1.5	10.0	35.0	45.0
	MAVI-M25/01	M25 x 1.5	M25 x 1.5	11.0	39.0	51.0
	MAVI-M32/01	M32 x 1.5	M32 x 1.5	13.0	46.0	54.0
	MAVI-M40/01	M40 x 1.5	M40 x 1.5	13.0	55.0	62.0
	MAVI-M50/01	M50 x 1.5	M50 x 1.5	14.0	65.0	75.0
	MAVI-M63/01	M63 x 1.5	M63 x 1.5	14.0	80.0	84.0

Where a certain cable outlet angle is required

In connection with PMA connectors, especially connectors with strain relief VNZ

Enables different mounting positions: With a lock nut behind a clearance hole / In threaded holes (lock nut on MAVI side for positioning) / With SCA spin-coupler


Nickel-plated aluminium (other materials e.g. stainless steel or nickel-plated brass available on request)

High thread and system connection strength

IP68 static/IP67 dynamic

Temperature range: -60°C to +105°C

Type MAVIK - Positioning 45° elbow adapter, metric thread

	Order no.	Thread metric		Thread length outside (mm)	Outside Ø (mm)	Overall length (mm)
		Inside	Outside			
	MAVIK-M20/01	M20 x 1.5	M20 x 1.5	10.0	35.0	52.0
	MAVIK-M25/01	M25 x 1.5	M25 x 1.5	11.0	39.0	58.0
	MAVIK-M32/01	M32 x 1.5	M32 x 1.5	13.0	46.0	61.0
	MAVIK-M40/01	M40 x 1.5	M40 x 1.5	13.0	55.0	69.5
	MAVIK-M50/01	M50 x 1.5	M50 x 1.5	14.0	65.0	83.0
	MAVIK-M63/01	M63 x 1.5	M63 x 1.5	14.0	80.0	92.0

Where a certain cable outlet angle is required

In connection with PMA connectors, especially connectors with strain relief VNZ

The counter nut allows accurate positioning of the outlet direction in threaded holes

Adapter made from nickel-plated aluminium (other materials e.g. stainless steel or nickel-plated brass available on request), counter nut made from nickel-plated brass

High thread and system connection strength


IP68 static/IP67 dynamic

Temperature range: -60°C to +105°C

Swivel and positioning adapters, metric, PG

Type SWA & SCA

Type SWA - Swivel adapter with special sealing, metric/PG metal thread

	Order no.	Thread metric	Thread length (mm)	Outside Ø (mm)	Overall length (mm)
	SWA-M16-10	M16 x 1.5	10.0	23.0	37.5
	SWA-M20-10	M20 x 1.5	10.0	27.0	38.5
	SWA-M25-11	M25 x 1.5	11.0	32.0	41.0
	SWA-M32-13	M32 x 1.5	13.0	45.0	46.5
	SWA-M40-13	M40 x 1.5	13.0	55.0	47.5
	SWA-M50-14	M50 x 1.5	14.0	59.0	49.5
	SWA-M63-14	M63 x 1.5	14.0	75.0	52.0

	Order no.	Thread PG	Thread length (mm)	Outside Ø (mm)	Overall length (mm)
	SWA-P09	09	15.0	23.0	44.5
	SWA-P11	11	15.0	27.0	45.5
	SWA-P16	16	15.0	32.0	48.0
	SWA-P21	21	15.0	40.0	51.0
	SWA-P29	29	15.0	50.0	52.0
	SWA-P36	36	15.0	59.0	55.0
	SWA-P48	48	15.0	70.0	55.0

Allow PMA connectors to swivel freely in applications where such movement is occasionally necessary


In connection with PMA connectors with metal thread

Nickel-plated brass with thread edge protection

IP68 and IP69

Temperature range: -40°C to +105°C

Type SCA - Positioning adapter, metric/PG metal thread

	Order no.	Thread metric	Thread length (mm)	Outside Ø (mm)	Overall length (mm)
	SCA-M16-10	M16 x 1.5	10.0	22.0	32.0
	SCA-M20-10	M20 x 1.5	10.0	26.0	33.0
	SCA-M25-11	M25 x 1.5	11.0	32.0	35.0
	SCA-M32-13	M32 x 1.5	13.0	39.0	39.5
	SCA-M40-13	M40 x 1.5	13.0	50.0	41.0
	SCA-M50-14	M50 x 1.5	14.0	59.0	43.5
	SCA-M63-14	M63 x 1.5	14.0	75.0	45.5

	Order no.	Thread PG	Thread length (mm)	Outside Ø (mm)	Overall length (mm)
	SCA-P09	09	12.0	22.0	35.0
	SCA-P11	11	12.0	26.0	36.0
	SCA-P16	16	13.0	29.0	38.0
	SCA-P21	21	14.0	39.0	41.0
	SCA-P29	29	14.0	44.0	42.5
	SCA-P36	36	17.0	59.0	49.0
	SCA-P48	48	17.0	69.0	50.5

Allows easy positioning of elbow connectors with metal thread

In connection with PMA connectors with metal thread (Metric: Metal long thread)

Nickel-plated brass

High fastening torque with thread edge protection

P68 and IP69

Temperature range: -40°C to +105°C

PMA JUMBO sizes

General technical details

Larger sizes for big solutions. When you need conduits with larger sizes for your cable protection, we provide you with a comprehensive selection of large size conduits including connectors and flanges.

—
* All conduits are REACH and RoHS compliant

The PMA JUMBO product line includes a range of large size cable protection products. Seven different conduit types using a variety of raw materials, to provide optimal performance in various applications and compatible fittings.

- PMA JUMBO conduits polyamide and polyurethane conduits in the large nominal width sizes NW56, 70, 95, 125 (PA6 conduits – PCL, CYL, VCS, VOH) (PA12 conduits – PIS) (PU conduits – PUE)
- PMAGRIP flange and threaded fittings plus accessories BGG (straight), BGO (90°) flange fittings achieve a sealing rating of IP50 and IP65 with a conduit sealing ring BGGV (straight), BGOV (90°) flange fittings achieve a sealing rating of IP68


Material

- Conduits made from specially formulated PA6, PA12 and PU
- Fittings made from specially formulated polyamide 6
- Self-extinguishing
- Free from halogens, REACH + RoHS compliant*
- Very good chemical properties
- Temperature range:
PA6 –40°C to +105°C, short-term to +160°C
PA12 –40°C to +95°C, short-term to +150°C
PU –60°C to +50°C

Characteristics

- Excellent conduit pull-out strength
- High impact resistance
- All PMA Jumbo conduits have a coarse (G) profile
- The conduit types PIS and VCS are UL recognized in jumbo sizes for use with the flange type fittings.



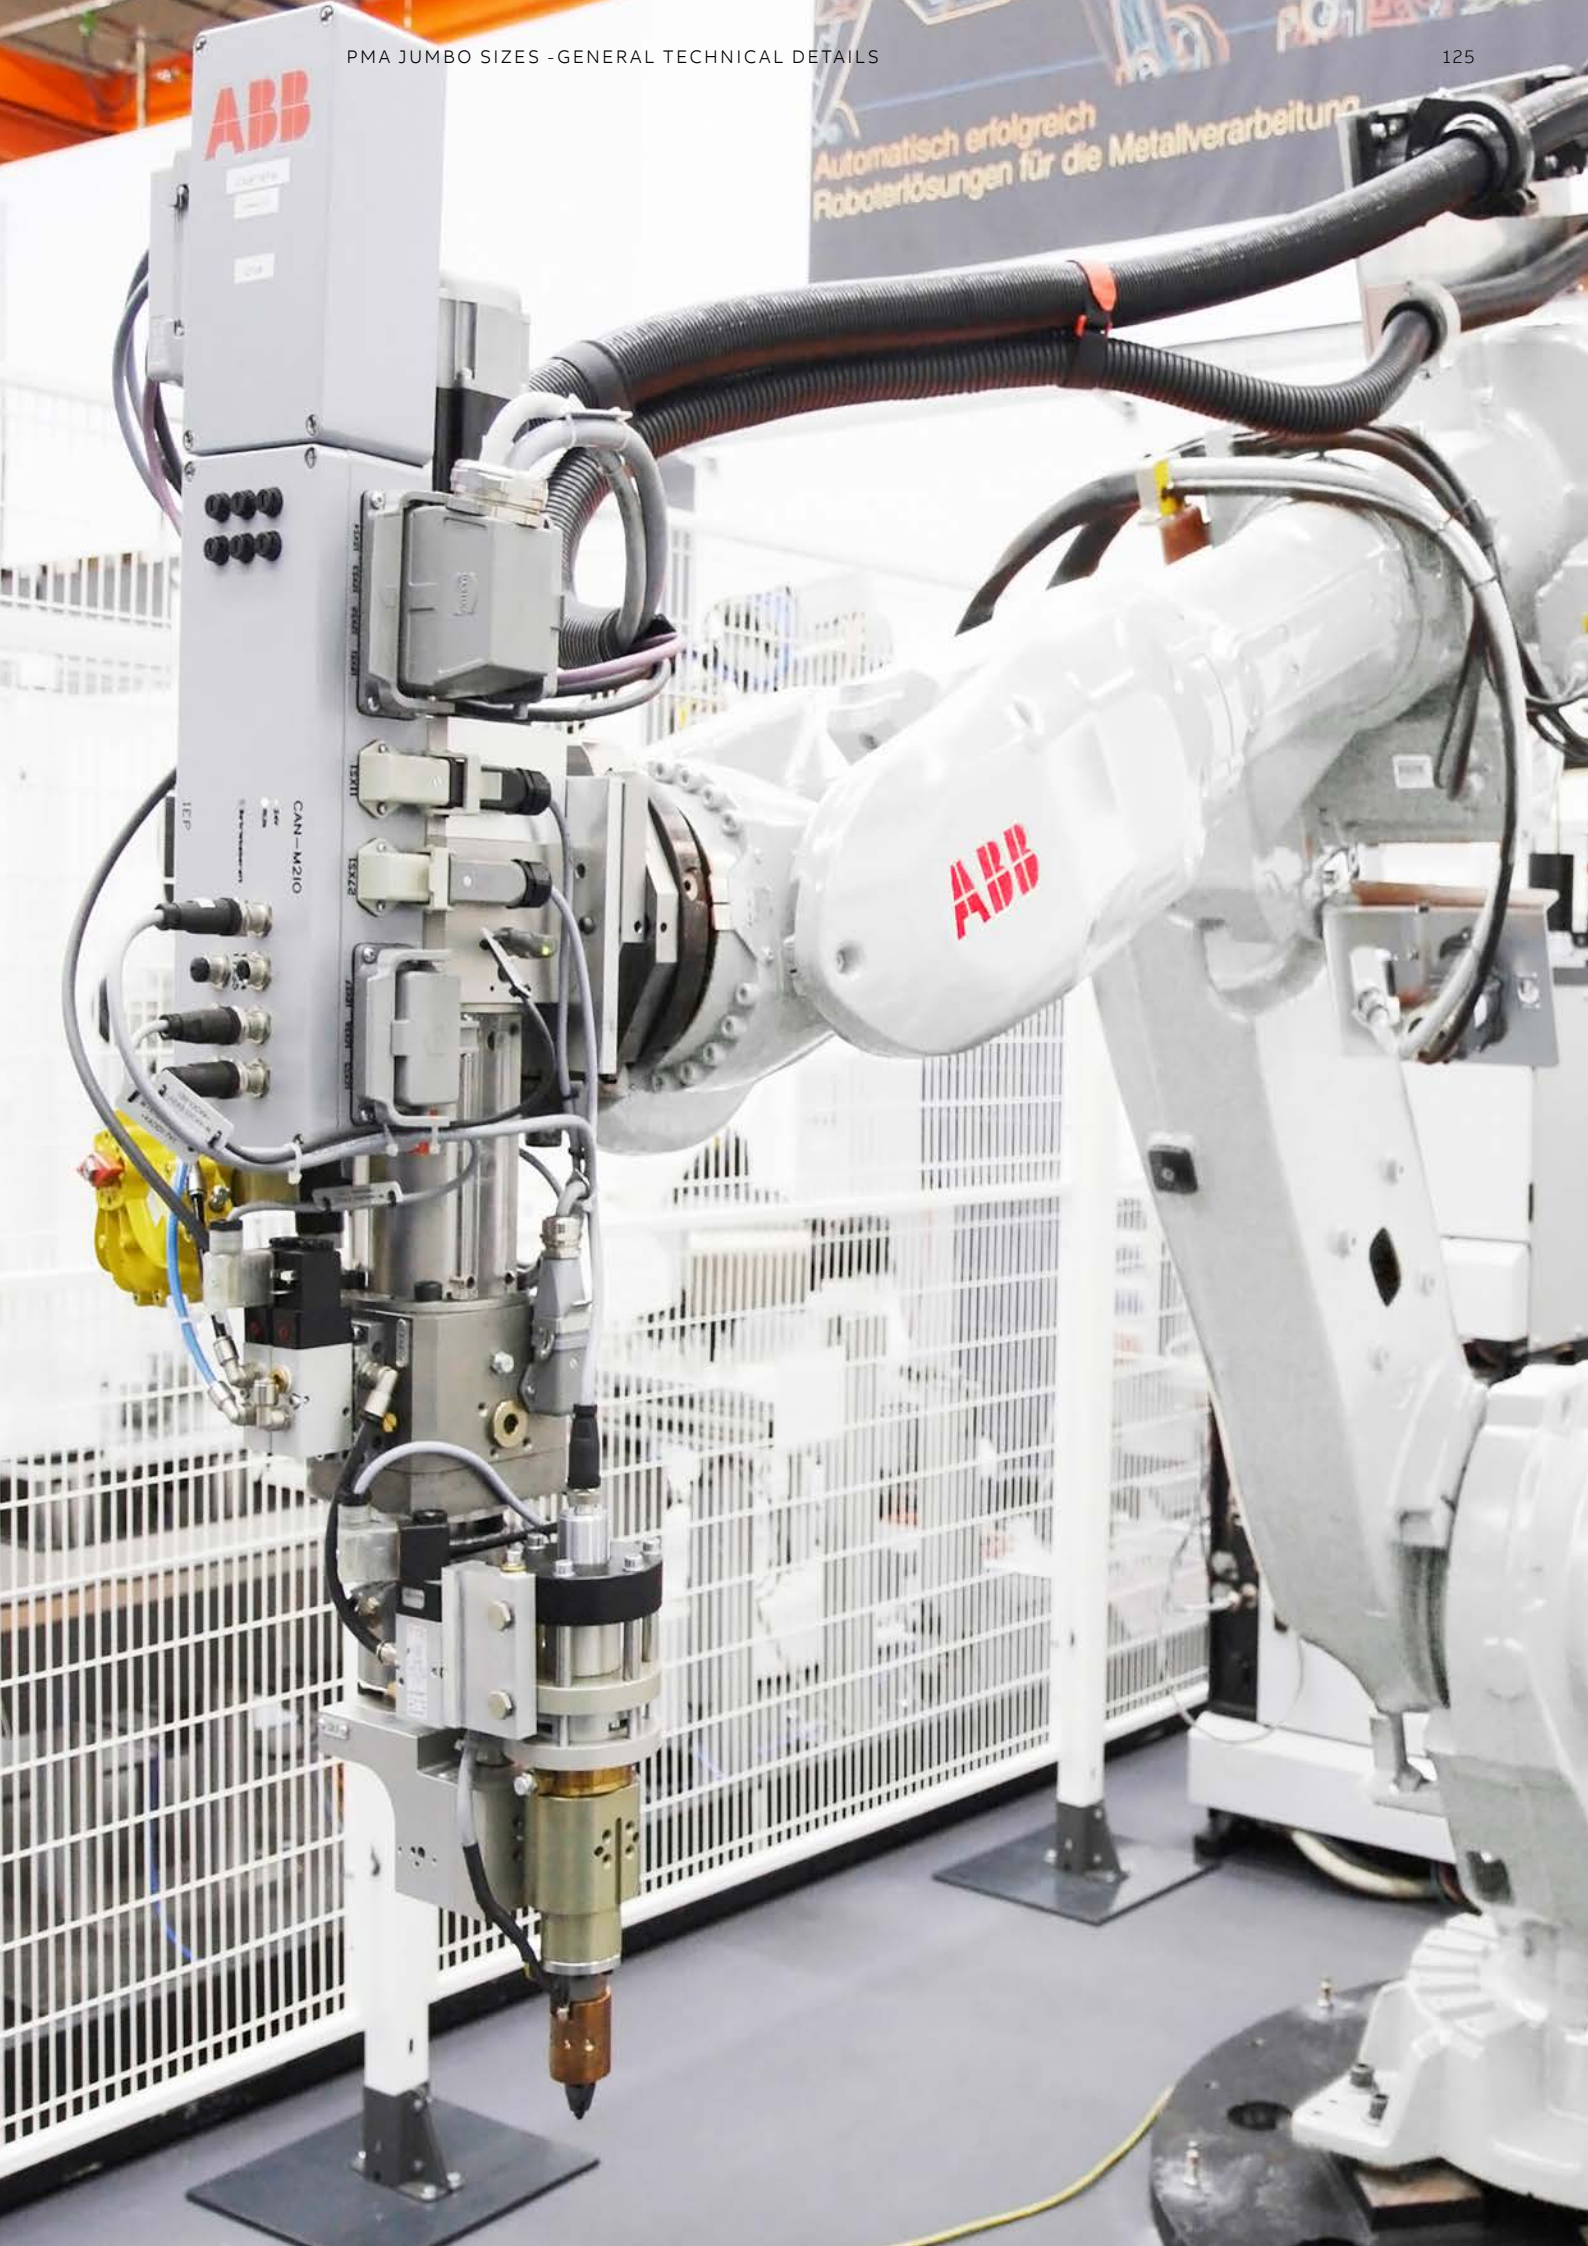



Conduits, large sizes

Type PMAFLEX JUMBO conduits

Type PMAFLEX JUMBO conduits

	Order no. black	Order no. grey	Conduit size		Inside Ø (mm)	Outside Ø (mm)	Stat./Dyn. radius (mm)	PU meter
			NW	Metric				
PMAFLEX JUMBO conduits	PCLG-56B	PCLG-56S	56	68	56.3	67.2	130/-	30
	PCLG-70B	PCLG-70S	70	80	67.5	80.0	160/-	10
	PCLG-95B	PCLG-95S	95	106	91.5	106.0	210/-	10
	PCLG-125B	PCLG-125S	125	146	126.5	146.5	450/-	6
	PIHG-56B	PIHG-56S	56	68	56.3	67.2	110/270	30
	PIHG-70B	PIHG-70S	70	80	67.2	79.6	150/350	30
	PIHG-95B	PIHG-95S	95	106	91.3	106.0	170/450	30
	PIHG-125B	PIHG-125S	125	146	126.5	146.5	350/480	20
	VCSG-56B	VCSG-56S	56	68	56.1	67.2	150/-	30
	VCSG-70B	VCSG-70S	70	80	66.5	80.0	200/-	10
	VCSG-95B	VCSG-95S	95	106	91.0	106.0	300/-	10
	LLPAG-56A	LLPAG-56S	56	68	56.3	67.2	120/-	30
	LLPAG-70A	LLPAG-70S	70	80	68.0	80.0	160/-	10
	LLPAG-95A	LLPAG-95S	95	106	91.9	106.0	210/-	10
	LLPAG-125A	LLPAG-125S	125	146	126.5	146.5	450/-	6
	VOHG-56B	VOHG-56S	56	68	55.5	67.2	135/-	10
	VOHG-70B	VOHG-70S	70	80	67.0	80.0	200/-	10
	VOHG-95B	VOHG-95S	95	106	90.5	106.0	300/-	10
	VOHG-125B	VOHG-125S	125	146	126.0	146.5	480/-	6
	PUEG-56B	-	56	68	56.3	67.2	90/170	30
	PUEG-70B	-	70	80	68.2	80.5	100/220	30

Approvals




For further conduits and other sizes see conduit guide

PMAGRIP flange connectors

Type GG & GO

Type GG - Flange straight


	Order no. black	Order no. grey	Fits to conduit size		Width (mm)	Height (mm)	Depth (mm)
			NW	Metric			
	BGG-56	SGG-56	56	68	82.0	97.0	42.0
	BGG-70	SGG-70	70	80	97.0	114.0	48.0
	BGG-95	SGG-95	95	106	126.0	146.0	53.0
	BGG-125	SGG-125	125	146	-	194.0	79.0

Approvals



Ingress protection: IP50 without conduit seal ring (IP65 with conduit seal ring)
 Flange seal FGO4 made from EPDM, standard for indoor and outdoor applications
 Flange seal FGO4/01 made from NBR, optional for indoor applications with special chemical requirements
 Temperature range with FGO4: -40°C to +105°C
 Temperature range with FGO4/01: -25°C to +70°C
 Content of delivery: Flange part, fixation clamps (incl. 2 screws), flange seal (FGO4 or FGO4/01), conduit seal ring (optional for IP65)

Type GO - Flange 90° elbow

	Order no. black	Order no. grey	Fits to conduit size		Width (mm)	Height (mm)	Depth (mm)
			NW	Metric			
	BGO-56	SGO-56	56	68	82.0	97.0	101.0
	BGO-70	SGO-70	70	80	97.0	114.0	115.0
	BGO-95	SGO-95	95	106	126.0	146.0	149.0

Approvals



Ingress protection: IP50 without conduit seal ring (IP65 with conduit seal ring)
 Flange seal FGO4 made from EPDM, standard for indoor and outdoor applications
 Flange seal FGO4/01 made from NBR, optional for indoor applications with special chemical requirements
 Temperature range with FGO4: -40°C to +105°C
 Temperature range with FGO4/01: -25°C to +70°C
 Content of delivery: Flange part, fixation clamps (incl. 2 screws), flange seal (FGO4 or FGO4/01), conduit seal ring (optional for IP65)

PMAGRIP flange connectors

Type GGV & GOV

Type GGV - Flange straight

	Order no. black, IP68	Fits to conduit size		Width (mm)	Height (mm)	Depth (mm)
		NW	Metric			
GGV	BGGV-56	56	68	82.0	97.0	42.0
	BGGV-70	70	80	97.0	114.0	48.0
	BGGV-95	95	106	126.0	146.0	53.0



Approvals



In railway vehicle construction as well as in a wide range of industrial applications with high sealing and safety requirements
 Flange seal FGO4 made from EPDM, standard for indoor and outdoor applications
 Flange seal FGO4/01 made from NBR on request, optional for indoor applications with special chemical requirements
 Ingress protection: IP68, IP69 with conduit sealing NVN3
 Temperature range with FGO4: -40°C to +105°C
 Temperature range with FGO4/01: -25°C to +70°C
 If the application temperature is above 70°C we recommend to use an additional internal conduit support sleeve (BES)
 Content of delivery: Flange part, fixation clamps (incl. 2 screws), conduit seal (NVN3), flange seal (FGO4 or FGO4/01)

Type GOV - Flange 90° elbow

	Order no. black, IP68	Fits to conduit size		Width (mm)	Height (mm)	Depth (mm)
		NW	Metric			
GOV	BGOV-56	56	68	82.0	97.0	101.0
	BGOV-70	70	80	97.0	114.0	115.0
	BGOV-95	95	106	126.0	146.0	149.0



Approvals



In railway vehicle construction as well as in a wide range of industrial applications with high sealing and safety requirements
 Flange seal FGO4 made from EPDM, standard for indoor and outdoor applications
 Flange seal FGO4/01 made from NBR on request, optional for indoor applications with special chemical requirements
 Ingress protection: IP68, IP69 with conduit sealing NVN3
 Temperature range with FGO4: -40°C to +105°C
 Temperature range with FGO4/01: -25°C to +70°C
 If the application temperature is above 70°C we rec. to use an additional internal conduit support sleeve (BES)
 Content of delivery: Flange part, fixation clamps (incl. 2 screws), conduit seal (NVN3), flange seal (FGO4 or FGO4/01)

PMAGRIP threaded connectors

Type GG & GI

Type GG - Connector straight with locking clamps, metric/PG thread

	Order no. black	Order no. grey	Thread	Fits to conduit size		Thread length (mm)	Outside Ø (mm)	Overall length (mm)
				NW	Metric			
GG	BGG-M6356	SGG-M6356	M63 x 1.5	56	68	18.0	98.0	57.5
	BGG-P3656	SGG-P3656	PG 36	56	68	18.0	98.0	57.3



Ingress protection: IP50 without conduit seal ring (IP65 with conduit seal ring)

Content of delivery: Threaded part, fixation clamps (incl. 2 screws), conduit seal ring (optional for IP65)

Type GI - Connector straight with locking clamps, metric female thread

	Order no. black	Order no. grey	Thread	Fits to conduit size		Thread length (mm)	Outside Ø (mm)	Overall length (mm)
				NW	Metric			
GI	BGI-M7556	SBI-M7556	M75 x 1.5	56	68	15.0	98.0	53.3




Ingress protection: IP50 without conduit seal ring (IP65 with conduit seal ring)

Content of delivery: Threaded part, fixation clamps (incl. 2 screws), conduit seal ring (optional for IP65)

Tube clamps, conduit seal rings, large size accessories


Type GH & SGS

Type GH - Tube clamp, one-piece

	Order no. black	Order no. grey	Fits to conduit size		Width (mm)	Fixing screw
			NW	Metric		
	BGH-56	SGH-56	56	68	26.0	2 x M8
	BGH-70	SGH-70	70	80	30.0	2 x M8
	BGH-95	SGH-95	95	106	30.0	2 x M8

For general machine and installation applications
 Integrated rib provides axial strain relief
 Allows turning of the conduit thus avoiding torsion stresses
 Pre-fixation on the conduit possible
 Allows solid fixation with 2 screws
 For other sizes of BGH tube clamps please see page 112
 PA 6

Type SGS - Tube clamp


	Order no.	Fits to conduit size		Width x Height x Depth (mm)	Fixing screw
		NW	Metric		
	SGS-36	36	40	80.0 x 48.0 x 19.0	2 x M6
	SGS-48	48	50	94.0 x 58.0 x 19.0	2 x M6
	SGS-56	56	68	118.0 x 72.0 x 24.0	2 x M8
	SGS-70	70	80	130.0 x 85.0 x 24.0	2 x M8
	SGS-95	95	106	156.0 x 110.0 x 24.0	2 x M8
	SGS-125	125	146	200.0 x 152.0 x 24.0	2 x M8

For fixation of static conduits
 Galvanized steel
 Elastomer profile (EPDM) free from halogens
 Smooth connection to PMA conduits
 Good resistance to ozone and ageing
 Temperature range: -40°C to +120°C

Tube clamps, conduit seal rings, large size accessories

Type SGO3

Type SGO3 - Conduit seal ring

	Order no.	Fits to conduit size		Inside Ø (mm)	Outside Ø (mm)	Thickness (mm)
		NW	Metric			
	SGO3-56	56	68	49.5	61.0	1.5
	SGO3-70	70	80	61.5	74.0	1.5
	SGO3-95	95	106	86.0	102.0	1.5
	SGO3-125	125	146	122.0	142.0	2.0

Used at the conduit end for sealing between the PMAGRIP flanges GG/GO/GI and PMA JUMBO conduits

Nitrile rubber NBR

Temperature range: -40°C to +105°C

PMA Divisible System

General technical details

One-piece Divisible System. The ideal solution for repairs, retrofit and pre-loomed applications. Equally all PMA conduits are compatible.

PMA offers a divisible system based upon PMA standard nominal widths.

This allows free combination of the PACOF and PPCOF divisible conduits with PMAFIX Pro, PMAFIX and PMA Smart Line fittings. Using the PMA Divisible System Fittings repairs can be easily made to existing installations without disconnecting cables. Equally all PMA conduits – also slit – are compatible with the fittings of the divisible system.

Material

- Conduits made from spec. formulated PA 6 and Polypropylene
- Fittings made from specially formulated polyamide 6
- Colour: Black
- Free from halogens, REACH + RoHS compliant
- Temperature range:
Conduits: –40°C to +160°C
Connectors: –40°C to min. +105°C

Characteristics

- Fast installation
- Conduit can be installed in fitting prior to closing the fitting
- High impact resistance
- High conduit pull-out strength
- Fits conduit profiles – fine (T) and coarse (G)






Conduits

Type PACOF & PPCOF

Type PACOF - Flexible, divisible


	Order no. black	Fits to conduit size		Inside Ø (mm)	Outside Ø (mm)	Stat. radius (mm)	PU meter
		NW	Metric				
	PACOF-07B	07	10	5.6	10.0	30	50
	PACOF-10B	10	12	8.5	12.8	33	50
	PACOF-12B	12	16	11.0	15.6	35	50
	PACOF-17B	17	20	15.5	21.1	45	50
	PACOF-23B	23	25	22.1	28.4	70	50
	PACOF-29B	29	32	27.2	34.5	120	50
	PACOF-36B	36	40	32.0	42.4	145	30
	PACOF-48B	48	50	43.9	54.1	150	30
	PACOF-70B	70	80	62.0	79.0	190	10

PACOF Index

min.	max.
Ductility	
Fatigue reversed bending	
Compression resistance	
Low temperature performance	
Weathering resistance	

For machine building and plant construction
 For trouble-free retrofitting and applicable for repairs
 Specially modified polyamide 6
 Can be opened and closed again in longitudinal direction any time
 Good ductility
 Good compression resistance
 Free from halogens, REACH + RoHS compliant
 Temperature range: -40°C to +105°C, short-term to +160°C
 IP50

Type PPCOF - Flexible, divisible

	Order no. black	Fits to conduit size		Inside Ø (mm)	Outside Ø (mm)	Stat. radius (mm)	PU meter
		NW	Metric				
	PPCOF-07B	07	10	5.6	10.0	25	50
	PPCOF-10B	10	12	8.5	12.8	28	50
	PPCOF-12B	12	16	11.0	15.6	35	50
	PPCOF-17B	17	20	15.1	21.1	45	50
	PPCOF-23B	23	25	22.1	28.4	60	50
	PPCOF-29B	29	32	26.6	34.5	100	50
	PPCOF-36B	36	40	31.8	42.4	120	30
	PPCOF-48B	48	50	43.9	54.1	140	30
	PPCOF-70B	70	80	60.5	78.0	200	10

PPCOF Index


min.	max.
Ductility	
Fatigue reversed bending	
Compression resistance	
Low temperature performance	
Weathering resistance	

For machine building and plant construction
 For trouble-free retrofitting and applicable for repairs
 Specially modified polypropylene PP
 Can be opened and closed again in longitudinal direction any time
 Good reversed bending resistance
 Temperature range: -20°C to +105°C, short-term to +150°C
 IP50

Connectors, lock nuts

Type LNO & LN

Type LNO - Divisible connector straight, one-piece, metric thread

	Order no. black	Thread metric	Fits to conduit size		Thread length (mm)	Overall length (mm)
			NW	Metric		
	BLNO-M160	M16 x 1.5	10	12	13.0	37.5
	BLNO-M162	M16 x 1.5	12	16	13.0	39.5
	BLNO-M202	M20 x 1.5	12	16	13.0	39.5
	BLNO-M207	M20 x 1.5	17	20	13.0	43.5
	BLNO-M257	M25 x 1.5	17	20	14.0	44.5
	BLNO-M253	M25 x 1.5	23	25	14.0	52.5
	BLNO-M323	M32 x 1.5	23	25	17.0	56.0
	BLNO-M329	M32 x 1.5	29	32	17.0	61.0
	BLNO-M409	M40 x 1.5	29	32	21.0	65.0
	BLNO-M406	M40 x 1.5	36	40	22.0	74.5
	BLNO-M508	M50 x 1.5	48	50	22.0	80.5

Divisible connector straight, one-piece, metric thread

Compatible with PMA standard, slit and divisible conduits with standard nominal widths


In industries, plant construction, machine building as well as in house and electrical installations

For retrofit installation or repair

IP54

Special: Push-in installation of conduit into pre-installed fitting also possible

Type LN - Divisible lock nut, metric thread

	Order no. black	Thread metric	Fits with divisible connector		Wrench size (mm)	Width (mm)
			BLNO-M160	BLNO-M162		
	BLN-M16	M16 x 1.5	BLNO-M160	BLNO-M162	22.0	8.0
	BLN-M20	M20 x 1.5	BLNO-M202	BLNO-M207	26.0	8.0
	BLN-M25	M25 x 1.5	BLNO-M257	BLNO-M253	32.0	9.0
	BLN-M32	M32 x 1.5	BLNO-M323	BLNO-M329	41.0	12.0
	BLN-M40	M40 x 1.5	BLNO-M409	BLNO-M406	50.0	15.0
	BLN-M50	M50 x 1.5	BLNO-M508		60.0	15.0

Compatible with divisible PMA connectors, type BLNO


For retrofit installation or repair

Temperature range: -40°C to +100°C, short-term: +130°C

T, Y pieces, connection splice


Type LTO & LYO

Type LTO - Divisible T piece, one-piece

	Order no. black, IP40	3x conduit sizes	
		NW	Metric
	BLTO-070707	07	10
	BLTO-101010	10	12
	BLTO-121212	12	16
	BLTO-171717	17	20
	BLTO-232323	23	25
	BLTO-292929	29	32

Compatible with PMA standard, slit and divisible conduits with standard nominal widths
 In industries, plant construction, machine building as well as in house and electrical installations
 For retrofit installation or repair
 IP40
 Conduit can be installed in fitting prior to closing the fitting

Type LYO - Divisible Y piece, one-piece


	Order no. black, IP40	1x conduit size		2x conduit sizes	
		NW	Metric	NW	Metric
	BLYO-100707	10	12	07	10
	BLYO-121010	12	16	10	12
	BLYO-171212	17	20	12	16
	BLYO-231717	23	25	17	20
	BLYO-292917	17	20	29	32

Compatible with PMA standard, slit and divisible conduits with standard nominal widths
 In industries, plant construction, machine building as well as in house and electrical installations
 For retrofit installation or repair
 IP40
 Conduit can be installed in fitting prior to closing the fitting

T, Y pieces, connection splice

Type LSGO

Type LSGO - One-piece, divisible

	Order no. black, IP40	Fits to conduit size NW	Overall length (mm)	Outer Ø (mm)
	BLSGO-101010	10	36	16
	BLSGO-121212	12	36	21
	BLSGO-171717	17	38	26
	BLSGO-232323	23	39	33

Compatible with PMA standard, slit and divisible conduits with standard nominal widths
 In industries, plant construction, machine building as well as in house and electrical installations
 For retrofit installation or repair
 Polyamide (Nylon) 66
 IP40 rated

PMA Smart Line IP66

General technical details

Modern, versatile and attractive. Functional and modern design, providing excellent value for money. Suitable for machine building, installation and construction industries.

One-piece design, IP66 protection and simple, fast installation are the outstanding features of the Smart Line. Other characteristics including a modern, functional design and an excellent price/performance ratio make this product line a very attractive solution.

Material

- Fittings made from specially formulated polyamide 6
- Self-extinguishing
- Free from halogens, REACH + RoHS compliant
- Temperature range:
–45°C to +105°C, short-term to +150°C

Characteristics

- High impact resistance
- Good conduit pull-out strength
- Vibration-proof connection to PMA conduits
- Fits conduit profiles – fine (T) and coarse (G)
- To avoid accidental opening, disassembling only possible with a screwdriver





PMA Smart Line

General technical details




—
Patent

—
IP66



IP66 static

IP54 dynamic

- One piece fitting
- Conical sealing method
- Integrated sealing lip in thread flange
- Easy “push-in” installation
- Ready for installation (fitting gets delivered with engaged locking elements)

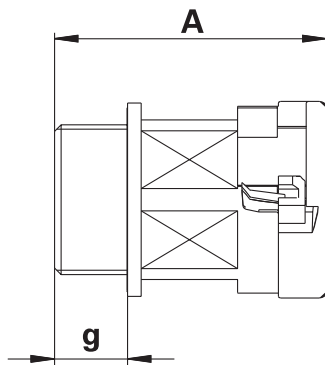


g = Thread length A = Overall length

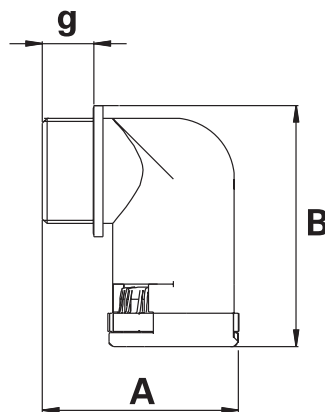

g = Thread length A x B = External dimensions


PMA Smart Line

Part number codes

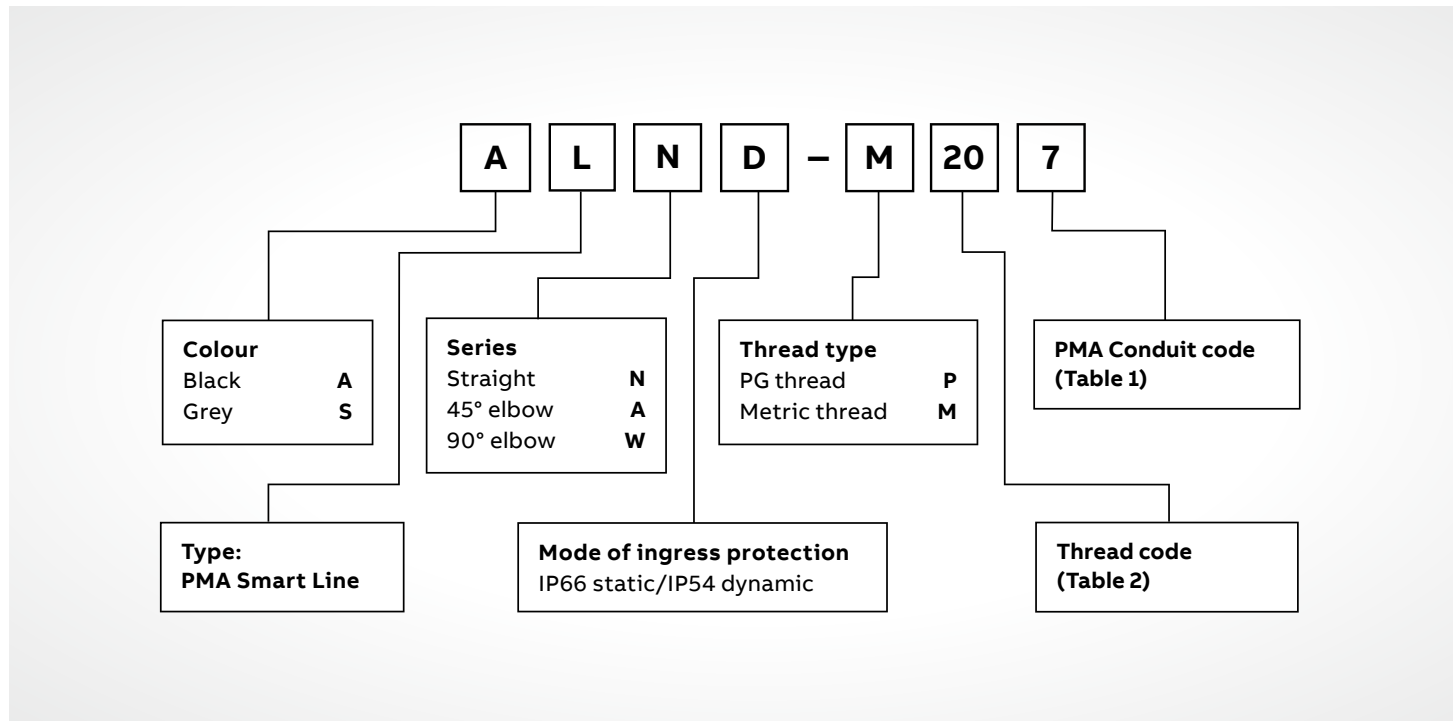


Connector series


- 01 Straight (N)
- 02 45° elbow (A)
- 03 90° elbow (W)



—
01



—
02



—
03

PMA Smart Line

Size codes, installation

Table 1: Conduit codes


Nominal width	Metric size	PMA code
07	10	M
10	12	0
12	16	2
17	20	7
23	25	3
29	32	9
36	40	6
48	50	8

Table 2: Thread codes

Thread Metric	PMA code
M12 x 1.5	M12
M16 x 1.5	M16
M20 x 1.5	M20
M25 x 1.5	M25
M32 x 1.5	M32
M40 x 1.5	M40
M50 x 1.5	M50
M63 x 1.5	M63


Thread PG	PMA code
PG07	P07
PG09	P09
PG11	P11
PG13.5	P13
PG16	P16
PG21	P21
PG29	P29
PG36	P36
PG48	P48

Installation IP66

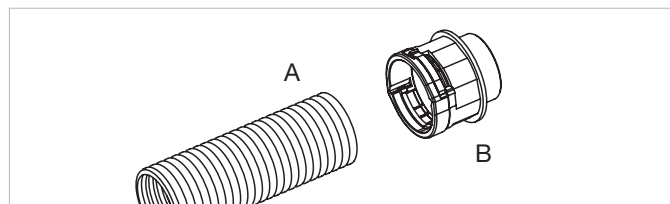


01

A = Conduit
B = Fitting

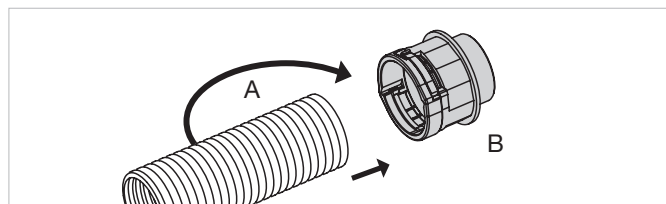


02

Push in the conduit (A) with a slight twist until the stop.

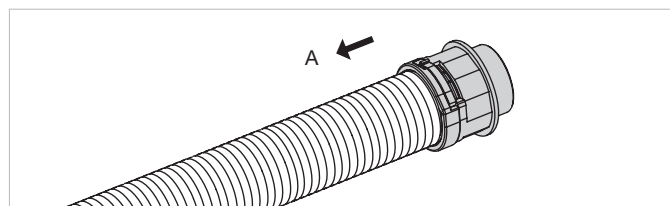

03

Pull back the conduit (A) slightly to ensure the locking mechanism is fully engaged.

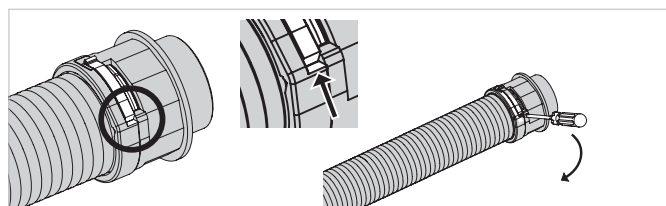


04

To disengage the locking mechanism use a size 1 screwdriver.


Connectors, metric, polyamide thread

Type LND & LAD

Type LND - Connector straight, metric thread

	Order no. black, IP66	Order no. grey, IP66	Thread metric	Fits to conduit size		Thread length (mm)	Overall length (mm)
				NW	Metric		
				LND, patent	ALND-M120		
	ALND-M160	SLND-M160	M16 x 1.5	10	12	11.0	34.0
	ALND-M162	SLND-M162	M16 x 1.5	12	16	11.0	38.0
	ALND-M200	SLND-M200	M20 x 1.5	10	12	11.0	34.0
	ALND-M202	SLND-M202	M20 x 1.5	12	16	11.0	38.0
	ALND-M207	SLND-M207	M20 x 1.5	17	20	11.0	41.0
	ALND-M257	SLND-M257	M25 x 1.5	17	20	12.0	42.0
	ALND-M253	SLND-M253	M25 x 1.5	23	25	12.0	45.5
	ALND-M323	SLND-M323	M32 x 1.5	23	25	15.0	48.5
	ALND-M329	SLND-M329	M32 x 1.5	29	32	15.0	50.5
	ALND-M409	SLND-M409	M40 x 1.5	29	32	19.0	54.5
	ALND-M406	SLND-M406	M40 x 1.5	36	40	19.0	60.5
	ALND-M506	SLND-M506	M50 x 1.5	36	40	19.0	61.0
	ALND-M508	SLND-M508	M50 x 1.5	48	50	19.0	61.0
	ALND-M638	SLND-M638	M63 x 1.5	48	50	19.0	61.0


Type LAD - Connector 45° elbow, metric thread

	Order no. black, IP66	Order no. grey, IP66	Thread metric	Fits to conduit size		Thread length (mm)	External Dimensions (mm)
				NW	Metric		
				LAD, patent	ALAD-M120		
	ALAD-M160	SLAD-M160	M16 x 1.5	10	12	11.0	42.5 x 35.0
	ALAD-M162	SLAD-M162	M16 x 1.5	12	16	11.0	47.5 x 39.5
	ALAD-M202	SLAD-M202	M20 x 1.5	12	16	11.0	47.5 x 41.5
	ALAD-M207	SLAD-M207	M20 x 1.5	17	20	11.0	54.0 x 46.0
	ALAD-M257	SLAD-M257	M25 x 1.5	17	20	12.0	55.0 x 48.5
	ALAD-M253	SLAD-M253	M25 x 1.5	23	25	12.0	63.5 x 55.5
	ALAD-M323	SLAD-M323	M32 x 1.5	23	25	15.0	67.0 x 60.0
	ALAD-M329	SLAD-M329	M32 x 1.5	29	32	15.0	72.5 x 63.5
	ALAD-M409	SLAD-M409	M40 x 1.5	29	32	19.0	76.5 x 66.5
	ALAD-M406	SLAD-M406	M40 x 1.5	36	40	19.0	87.5 x 78.0
	ALAD-M506	SLAD-M506	M50 x 1.5	36	40	19.0	88.0 x 82.0
	ALAD-M508	SLAD-M508	M50 x 1.5	48	50	19.0	97.5 x 88.0
	ALAD-M638	SLAD-M638	M63 x 1.5	48	50	19.0	97.5 x 94.5


Connectors, metric and PG, polyamide thread

Type LWD & LND

Type LWD - Connector 90° elbow, metric thread

	Order no. black, IP66	Order no. grey, IP66	Thread metric	Fits to conduit size		Thread length (mm)	External dimensions (mm)
				NW	Metric		
LWD, patent 	ALWD-M120	SLWD-M120	M12 x 1.5	10	12	11.0	33.0 x 36.5
	ALWD-M160	SLWD-M160	M16 x 1.5	10	12	11.0	33.0 x 38.5
	ALWD-M162	SLWD-M162	M16 x 1.5	12	16	11.0	37.5 x 43.0
	ALWD-M202	SLWD-M202	M20 x 1.5	12	16	11.0	37.5 x 45.0
	ALWD-M207	SLWD-M207	M20 x 1.5	17	20	11.0	42.0 x 50.5
	ALWD-M257	SLWD-M257	M25 x 1.5	17	20	12.0	43.0 x 53.0
	ALWD-M253	SLWD-M253	M25 x 1.5	23	25	12.0	52.5 x 59.0
	ALWD-M323	SLWD-M323	M32 x 1.5	23	25	15.0	56.0 x 62.5
	ALWD-M329	SLWD-M329	M32 x 1.5	29	32	15.0	62.5 x 69.0
	ALWD-M409	SLWD-M409	M40 x 1.5	29	32	19.0	66.5 x 72.0
	ALWD-M406	SLWD-M406	M40 x 1.5	36	40	19.0	76.0 x 83.0
	ALWD-M506	SLWD-M506	M50 x 1.5	36	40	19.0	76.0 x 87.0
	ALWD-M508	SLWD-M508	M50 x 1.5	48	50	19.0	89.0 x 92.5
	ALWD-M638	SLWD-M638	M63 x 1.5	48	50	19.0	89.0 x 99.0

Type LND - Connector straight, PG thread


	Order no. black, IP66	Order no. grey, IP66	Thread PG	Fits to conduit size		Thread length (mm)	Overall length (mm)
				NW	Metric		
LND, patent 	ALND-P070*	SLND-P070*	07	10	12	7.0	44.0
	ALND-P090	SLND-P090	09	10	12	11.0	34.0
	ALND-P092*	SLND-P092*	09	12	16	8.0	50.0
	ALND-P110	SLND-P110	11	10	12	8.0	45.5
	ALND-P112	SLND-P112	11	12	16	11.0	38.0
	ALND-P132	SLND-P132	13.5	12	16	11.0	38.0
	ALND-P137	SLND-P137	13.5	17	20	11.0	41.0
	ALND-P167	SLND-P167	16	17	20	11.0	41.0
	ALND-P213	SLND-P213	21	23	25	12.0	45.5
	ALND-P299	SLND-P299	29	29	32	12.0	47.5
	ALND-P366	SLND-P366	36	36	40	13.0	54.5
	ALND-P488	SLND-P488	48	48	50	13.0	55.0

*These products will be delivered with a thread adapter


Connectors, PG, polyamide thread

Type LAD & LWD conduits

Type LAD - Connector 45° elbow, PG thread

	Order no. black, IP66	Order no. grey, IP66	Thread PG	Fits to conduit size		Thread length (mm)	External dimensions (mm)
				NW	Metric		
LAD, patent 	ALAD-P090	SLAD-P090	09	10	12	11.0	42.5 x 34.0
	ALAD-P112	SLAD-P112	11	12	16	11.0	47.5 x 40.0
	ALAD-P132	SLAD-P132	13.5	12	16	11.0	47.5 x 41.5
	ALAD-P137	SLAD-P137	13.5	17	20	11.0	54.0 x 46.0
	ALAD-P167	SLAD-P167	16	17	20	11.0	54.0 x 47.0
	ALAD-P213	SLAD-P213	21	23	25	12.0	63.5 x 57.5
	ALAD-P299	SLAD-P299	29	29	32	12.0	69.5 x 65.0
	ALAD-P366	SLAD-P366	36	36	40	13.0	81.5 x 80.0
	ALAD-P488	SLAD-P488	48	48	50	13.0	91.5 x 93.0

Type LWD - Connector 90° elbow, PG thread

	Order no. black, IP66	Order no. grey, IP66	Thread PG	Fits to conduit size		Thread length (mm)	External dimensions (mm)
				NW	Metric		
LWD, patent 	ALWD-P070*	SLWD-P070*	07	10	12	7.0	42.0 x 37.5
	ALWD-P090	SLWD-P090	09	10	12	11.0	32.5 x 37.5
	ALWD-P092*	SLWD-P092*	09	12	16	8.0	48.0 x 43.5
	ALWD-P110*	SLWD-P110*	11	10	12	8.0	44.0 x 40.0
	ALWD-P112	SLWD-P112	11	12	16	11.0	36.5 x 43.5
	ALWD-P130*	SLWD-P130*	13.5	10	12	9.0	37.5 x 40.0
	ALWD-P132	SLWD-P132	13.5	12	16	11.0	36.5 x 45.0
	ALWD-P137	SLWD-P137	13.5	17	20	11.0	41.0 x 50.5
	ALWD-P167	SLWD-P167	16	17	20	11.0	41.0 x 51.5
	ALWD-P213	SLWD-P213	21	23	25	12.0	52.0 x 61.0
	ALWD-P299	SLWD-P299	29	29	32	12.0	58.5 x 70.5
	ALWD-P366	SLWD-P366	36	36	40	13.0	70.0 x 85.0
	ALWD-P488	SLWD-P488	48	48	50	13.0	83.0 x 97.5

*These products will be delivered with a thread adapter

PMAJACK Plastic and metal braids

General technical details

Bundling and abrasion protection. Polyamide, polyester and steel braids – an alternative way to bundle and protect electrical cables.

Plastic braids manufactured from polyester and polyamide filaments – the other alternative solution for protecting and bundling cables.

This PMA cable protection system provides simple bundling and abrasion protection for cables and wires.

Various braid types to fulfill different requirements complimented by a range of braid terminations for simple and clean assembly.

Material

- Braids made from polyamide 6.6 or polyester
- Terminations made from PA 6, aluminium or brass
- Free from halogens, REACH + RoHS compliant

Characteristics

- Flammability of braids:
 - polyamide 6.6 UL 94 V2,
 - polyester UL 94 V0
- Braid design: Following DIN 65 164 part 1+2
- EN 45545-2 HL3






Plastic braided hoses

Type F.66 & C.66

Type F.66 - Braided hose


	Order no. black	Order no. grey	NW	Fits to termination	Weight nom. per 100 m (kg)	Operative range min. Ø (mm)	Operative range max. Ø (mm)
 <p>F.66</p>	F.66.04SW	F.66.04GR	4	–	0.4	3.0	7.0
	F.66.06SW	F.66.06GR	6	SRER-06	0.6	5.0	8.0
	F.66.08SW	F.66.08GR	8	SRER-06	0.8	7.0	10.0
	F.66.10SW	F.66.10GR	10	SRER-06	1.0	9.0	13.0
	F.66.12SW	F.66.12GR	12	SRER-06	1.4	11.0	16.0
	F.66.16SW	F.66.16GR	16	SRER-16	1.7	15.0	21.0
	F.66.20SW	F.66.20GR	20	SRER-16	2.0	20.0	26.0
	F.66.25SW	F.66.25GR	25	SRER-21/SRER-29	2.4	24.0	31.0
	F.66.30SW	F.66.30GR	30	SRER-21/SRER-29	3.5	28.0	38.0
	F.66.40SW	F.66.40GR	40	SRER-29	4.2	38.0	49.0
	F.66.50SW	F.66.50GR	50	SREV-40/SRER-50	5.1	48.0	65.0
	F.66.70SW	F.66.70GR	70	SREV-40/SRER-50	4.9	48.0	85.0

Approvals



Monofile Ø: 0.28mm for increased abrasion properties
 Coverage: >90%
 Polyamide 6.6
 Specifications: DIN 5510 (S4/SR2/ST2), UL-File E 125 619, EN45545-2 HL3
 Temperature range: -55°C to +135°C, short-term to +160°C

Type C.66 - Braided hose


	Order no. black	Order no. grey	NW	Fits to termination	Weight nom. per 100 m (kg)	Operative range min. Ø (mm)	Operative range max. Ø (mm)
 <p>C.66</p>	C.66.10SW	C.66.10GR	10	SRER-06	0.7	8.0	14.0
	C.66.12SW	C.66.12GR	12	SRER-06/SRER-16	0.9	9.0	18.0
	C.66.16SW	C.66.16GR	16	SRER-06/SRER-16	1.2	11.0	22.0
	C.66.20SW	C.66.20GR	20	SRER-16/SRER-21	1.4	14.0	26.0
	C.66.25SW	C.66.25GR	25	SRER-16/SRER-21	1.4	18.0	28.0
	C.66.30SW	C.66.30GR	30	SRER-21/SRER-29	2.5	25.0	43.0
	C.66.40SW	C.66.40GR	40	SRER-29	2.5	30.0	52.0
	C.66.45SW	–	45	SREV-40/SRER-50	4.0	40.0	73.0

Monofile Ø: 0.28mm for increased abrasion properties
 Coverage: >75%
 Polyamide 6.6
 Specifications: DIN 5510 (S4/SR2/ST2), EN45545-2 HL3
 Temperature range: -55°C to +135°C, short-term to +160°C

Plastic braided hoses

Type L.66

Type L.66 - Braided hose

	Order no. black	Order no. grey	NW	Fits to termination	Weight nom. per 100 m (kg)	Operative range min. Ø (mm)	Operative range max. Ø (mm)
L.66	L.66.04SW	L.66.04GR	04	–	0.4	4.0	5.0
	L.66.08SW	L.66.08GR	08	SRER-06	0.5	5.0	10.0
	L.66.10SW	L.66.10GR	10	SRER-06	0.8	7.0	13.0
	L.66.16SW	L.66.16GR	16	SRER-16	0.9	11.0	20.0
	L.66.20SW	L.66.20GR	20	SRER-16	1.4	17.0	33.0
	L.66.25SW	L.66.25GR	25	SRER-21/SRER-29	1.5	21.0	34.0
	L.66.30SW	L.66.30GR	30	SRER-21/SRER-29	1.8	25.0	45.0
	L.66.40SW	L.66.40GR	40	SRER-29	1.9	31.0	55.0
	L.66.50SW	L.66.50GR	50	SREV-40/SRER-50	3.2	58.0	70.0

Monofile Ø: 0.25mm

Coverage: > 65%

Polyamide 6.6


Specifications: DIN 5510 (S4/SR2/ST2), NF F 16-101/102 (I3/F2), EN45545-2 HL3

Temperature range: -55°C to +135°C, short-term to +160°C

Plastic braided hoses


Type G.PX & B.PX

Type G.PX - Braided hose

	Order no. black	NW	Packing unit PU/m	Weight nom. per 100m (kg)	Recommended range	
					min. Ø (mm)	max. Ø (mm)
	G.PX.05SW	05	25	1.6	4.5	5.5
	G.PX.08SW	08	25	2.0	7.0	9.0
	G.PX.10SW	10	25	2.3	9.0	11.0
	G.PX.13SW	13	25	2.5	11.5	13.0
	G.PX.16SW	16	25	3.4	14.5	17.5
	G.PX.19SW	19	25	3.8	17.0	21.0
	G.PX.25SW	25	25	4.8	22.5	27.5
	G.PX.29SW	29	25	5.3	26.0	32.0
	G.PX.32SW	32	25	6.1	29.0	35.0
	G.PX.38SW	38	25	8.3	34.0	42.0
	G.PX.50SW	50	25	8.7	45.0	55.0

Open, self winding construction. For retrofit installation. Overlapping: 90° (+40°/-25°). Polyester
 Specifications: DIN 5510 (S4/SR2/ST2), NF F 16-101/102 (I3/F2), EN45545-2 HL3. Temperature range: -55°C to +150°C

Type B.PX - Braided hose

	Order no. black	NW	Construction numb. x Ø mm	Packing unit PU/m	Weight nom. per 100m (kg)	Recommended range	
						min. Ø (mm)	max. Ø (mm)
	B.PX.12SW	12	96 x 0.20	100	0.5	6.0	18.0
	B.PX.15SW	15	144 x 0.20	100	0.7	10.0	28.0
	B.PX.30SW	30	192 x 0.20	100	0.9	20.0	42.0



Coverage: > 50%. Excellent abrasion properties. Lightweight structure. High flexibility. Excellent flame-retardant properties. Polyester
 Specifications: EN 45545-2 HL3 (R22 & R23). UL94 V0. Temperature range: -50°C to +120°C continuous, +150°C short-term

Braid terminations, connectors

Type RER/REV

Type RER/REV - Braid termination

	Order no. grey	NW	AI	AA	BI	BA	H	L	G	S	C
			(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)
RER/REV	SRER-06 (x)	06	6.5	13	-	-	13	21	33	13	6
	SRER-16 (x)	16	16	24	-	-	15	25	39	15	7
	SRER-21 (x)	21	22	32	-	-	20	29	43	15	7
	SRER-29 (z)	29	30	40	-	-	18	29	43	39	7
	SRER-50 (z)	50	50	61	-	-	18	29	43	50	7
	SREV-40 (y)	40	47	58	34	44	20	24	44	38	10




For termination and fixation of plastic braided hoses

Suitable for: F.66, C.66, L.66 braids


Polyamide 6

For exact braid and termination fitting configuration please refer to PMAJACK data sheets


RER
x = with one mounting hole



REV
y = with two mounting holes



RER
z = with three mounting holes



Braid terminations, connectors


Type BREIR & MREIR

Type BREIR - Connector for plastic braids, female thread

	Order no. black	NW	Thread size		Fits to PMAJACK		Ø	Ø	B	G	g	H	Ø
			UNE	UNE	F.66	ID	D1	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)
BREIR	BREIR-U2916	16	1 ³ / ₁₆ -18		12-20		36.2	20.5	10.5	36.5	9	15	25
	BREIR-U3516	16	1 ⁷ / ₁₆ -18				42.5	20.5	11.5	37.5	9	15	25



For round connectors
Suitable for: F.66, C.66, L.66 braids
Polyamide 6




Type MREIR - Connector for plastic braids, female thread

	Order no. grey	NW	Thread size		Fits to PMAJACK		g	Ø	Ø	L	Ø
			UNE	UNE	F.PX	C.66	(mm)	D1	D2	(mm)	ID
MREIR	MREIR-U3529	29	1 ⁷ / ₁₆ -18		25-40	30+40	29	40.0	40.5	37.5	30.0




For round connectors
Suitable for: F.66, C.66, L.66 braids
Black anodized aluminium



Stainless steel braids, tools

Type F.304 & HSG


Type F.304 - Stainless steel braided hose

	Order no.	Braid specification	Fits to conduit size NW	Operative range min. Ø (mm)	Operative range max. Ø (mm)
	F.304.10	24 x 7 x 0.3	10	10.0	18.0
	F.304.12	24 x 8 x 0.3	12	10.0	24.0
	F.304.17	24 x 12 x 0.3	17	15.0	28.0
	F.304.23	36 x 9 x 0.3	23	21.0	34.0
	F.304.29	36 x 11 x 0.3	29	25.0	40.0
	F.304.36	36 x 9 x 0.4	36	32.0	47.0
	F.304.48	48 x 10 x 0.4	48	55.0	80.0

Surface coverage: >90%

Temperature range: -70°C to +1000°C

Type HSG - Hot cutting tool

	Order no.	Order no. Spare cutting tape
	HSG-00	HSG-00-SB

For quick and easy cutting of plastic braidings

Smallest hot cutting tool for permanent use

With fixed edge (working area 30mm)

Voltage: 230 V-50 Hz (115 V-60 Hz)


Performance: 40W

Length of the connecting lead: 2m

Connectors, adapters


Type VEMD

Type VEMD - Connector for overbraided conduits, metric/PG metal thread


	Order no. with jubilee clip	Thread metric	Fits to conduit size		Outside Ø x Length (mm)
			NW	Metric	
	MVEMD-M406/01	40 x 1.5	36	40	55.0 x 59.0
	MVEMD-M508/01	40 x 1.5	48	50	65.0 x 62.0
	MVEMD-M6356/01	63 x 1.5	56	68	80.0 x 72.0
	Order no. with jubilee clip	Thread PG	Fits to conduit size		Outside Ø x Length (mm)
	MVEMD-P4856/01	48	56	68	80.0 x 72.0

Nickel-plated aluminium
IP66 up to IP68 on request

VEMD with metal cable tie "Band-It"



VEMD with jubilee clip



Content of delivery includes
blue marked products.

Connectors, adapters

Type VEMD-RER


Type VEMD-RER - Adapter for overbraided conduits

	Order no. with Band-It*	Order no. with jubilee clip	Fits to conduit size		Width x Height x Length (mm)
			NW	Metric	
VEMD-RER	MVEMD-RER6	MVEMD-RER6/01	36	40	54.0 x 54.0 x 53.0
	MVEMD-RER8	-	48	50	66.0 x 66.0 x 53.0




*Metal cable tie
Nickel-plated aluminium
IP66 on conduit side

VEMD-RER with metal cable tie "Band-It"



VEMD-RER with jubilee clip



Content of delivery includes
blue marked products.

Technical annex

Introduction

Conforms with standards. Intensive research and testing is the reason PMA continues to set new standards and trends in cable protection.

PMA products conform to worldwide standards and regulations.

As a pioneer in the field of cable protection, we have always given high priority to our own testing facilities, and we have consciously introduced stringent in-house standards. This approach has enabled PMA to exercise a significant influence on the development of international standards. Standards committees with responsibility for cable systems regularly ask our company to provide advice or participate as an active member.

High quality product from A-Z

From basic items to high-tech products, all of our products meet the most stringent quality requirements.


Some of the outstanding are:

- Resistance to temperature, weathering, UV radiation and chemical agents
- High system pull-out resistance
- Excellent fire protection characteristics (flammability, smoke density and toxicity)
- Excellent system ingress protection up to IP68 and IP69
- Extremely long service life
- Conformance to all major international product standards



Resistance to fatigue when exposed to Continuous Bending Test

According to EC EN 61386 and PMA DO 9.21-4425 test procedures. Both procedures describe tests designed to evaluate conduit resistance to fatigue when exposed to continuous cycles of repetitive bending. The test procedure involves bending back and forth around a central pivotal point. Although the test procedure is the same for both standards there are differences in the test parameters and the classification of results.

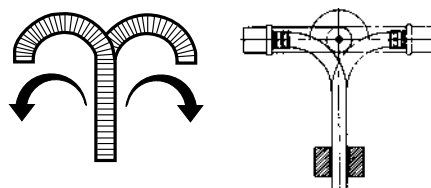

Technical annex



Testing methods according to IEC EN01386 and PMA internal procedures



Resistance to fatigue when exposed to Continuous Bending Test 2

According to PMA DO 9.21-4420 test procedures.


The PMA DO 9.21-4420 test procedures describes a demanding test for conduit fatigue when exposed to continuous repetitive bending. The conduit is fixed at the top of the apparatus, it passes over and under two pulley wheels. A weight is suspended at the bottom end simulating the weight of cables within the conduit. The pulley wheels move up and down continuously bending the conduit twice through 180° over its entire length.

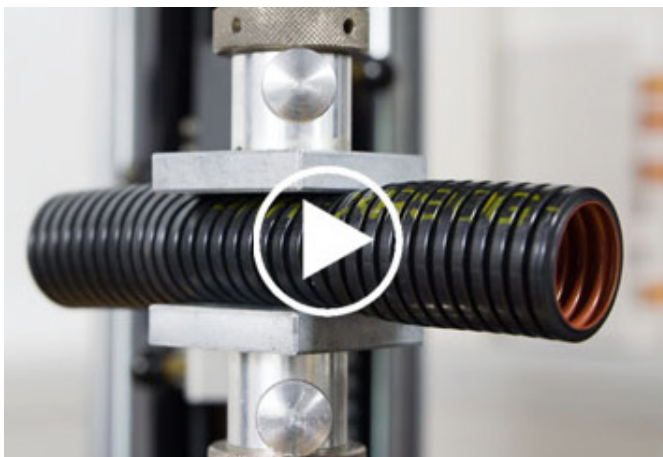

Compression Strength Test

According to IEC EN 61386 standard and PMA DO 9.21-4320 test procedures. Both, procedures describe a test designed to evaluate conduit resistance to compression forces.

Excessive deformation of a conduit under compression could potentially cause damage to cables being protected within it. The force required to compress the conduit between two square plates to a specific % of its original diameter is measured. Relaxation over time and recovery after removal of the force are evaluated.





Technical annex

Testing methods according to IEC EN01386 and PMA internal procedures




System Security - Pull-Out Strength Test

According to IEC EN 61386 and PMA DO 9.21-4610 test procedures. IEC EN 61386 and PMA DO 9.21-4610 are designed to test the security of the connection between conduit and fitting. Two fittings with a piece of conduit between them are pulled apart with steadily increasing force. Extension of the conduit is recorded graphically against the force applied. The force required to pull the conduit out of the fitting is determined. The tests are performed at 23°C and 50% r.h.

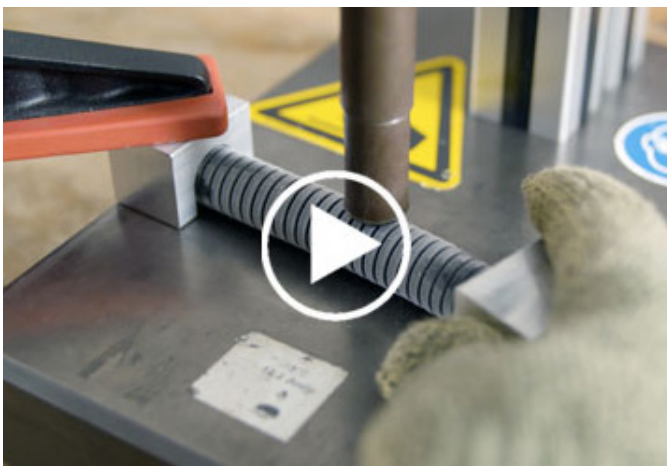

Resistance to Impact Test

According to IEC EN 61386 standard and PMA DO 9.21-4330 test procedures. IEC EN 61386 and PMA DO 9.21-4330 describe tests to evaluate the resistance of conduits to high energy impacts. They can be performed on conduits at various temperatures. Weights of different mass are dropped from an adjustable height directly onto a conduit sample which has been conditioned at the specified temperature.



Technical annex


Testing methods according to IEC EN01386 and PMA internal procedures



Flexibility at Low Temperature Test

According to PMA DO 9.21-4380 test procedures.


This standard describes a test procedure to evaluate the flexibility of conduits at low temperatures. The conduit under test is placed in a climatic chamber at the lowest specified operating temperature for four hours. It is then removed and immediately bent around a mandrel of diameter related to the outside diameter (OD) of the conduit.

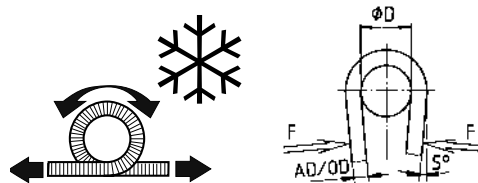

Resistance to thermal ageing test

According to PMA DO 9.21-4360 test procedures.

This standard describes a procedure designed to evaluate the thermal stability of a conduit and its resistance to thermal ageing. The conduit is exposed to a temperature significantly above the maximum recommended continuous operating temperature for 168 hours, 160°C (PA6) or 150°C (PA12). The Flexibility at Low Temperature procedure DO 9.21-4380 is performed both before and after the thermal ageing procedure. The results are compared to detect any change in material characteristics.

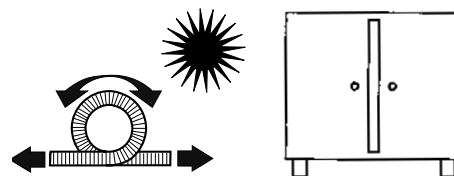



Technical annex

Testing methods according to IEC EN01386 and PMA internal procedures



Flammability tests

According to IEC EN 61386 and PMA DO 9.21-4430 test procedures. DO 9.21-4430 evaluates flammability characteristics using a defined flame from a standard burner. The time before ignition, fire propagation behaviour and extinguishing time after removal of the heat source are all factors in evaluating the flammability of conduits for a Self-Extinguishing Classification IEC 61386 uses the IEC 60695-2-11 glow wire test procedure for fittings and the IEC 60695-11-2 1 kW flame test for conduits to evaluate the flame Propagation behavior of the cable protection system allocating the classifications. Non-flame propagating or Flame Propagating.

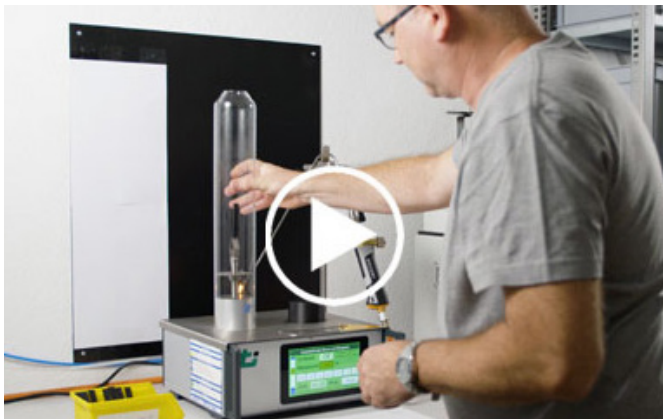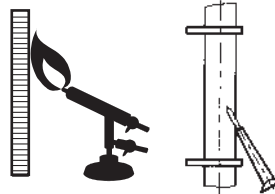

Flammability test - Limited oxygen supply

According to EN ISO 4589-2 standard. The limited oxygen index test is a commonly used method for assessing the flammability of materials. Samples of material are exposed to a flame within a chamber. The oxygen content within the controlled environment within the chamber can be varied to within 0.1%. Through an iterative method the maximum percentage of oxygen in the air at which the sample of material extinguishes is determined. This percentage of oxygen can be used as an indication of how easily a material burns. The higher the Limited Oxygen Index % value the less flammable a material is.

Resistance to chemicals test

According to ISO 175:210 standard. In many real application cable protection systems are exposed to chemicals. Extensive data is available for the compatibility of various plastic materials with many different chemicals. This data can be used for assessment of compatibility for specific applications. PMA publishes a compatibility list for the most commonly occurring combinations of plastic and chemical. If chemicals are mixed or if no data is available for an assessment PMA recommends a compatibility test. Changes to appearance, dimensions and mechanical characteristics are assessed after long term exposure to the chemical to confirm compatibility.



PMA® (DO) test procedures

PMA® has more than 15 test procedures (PMA DO) that enables us to perform cable protection-related, application-specific material and product tests.

Customers' application-specific needs are a top priority at PMA. That's why the company, as a leading manufacturer of cable protection products, voluntarily defined various supplementary in-house test procedures, which are consistently used to test PMA products to uniform criteria. This helps us safeguard the high quality and safety of PMA cable protection solutions and supply our customers with the best, most reliable products. It gives our customer the confidence that our products perform without failure or problems and meet their expectations.

The PMA test procedures apply not only to the general product properties usual for overarching standards but also to specific applications,

such as impact resistance in low-temperature rail applications, ingress protection in dynamic outdoor applications or abrasion resistance in automation applications. PMA test procedures are primarily used in areas where the market has yet to define overarching binding standards for specific applications. Many of our bespoke test procedures are geared to existing overarching standards wherever possible, and often correspond to other international standards in terms of structure, procedure and results assessment.

Scope of a PMA test procedures:

- Detailed description of the content of testing
- Definition of samples in terms of material and quantity, distinction from other products
- Definition of the test environment, e.g. climate conditions and temperature
- Definition of devices and apparatus used in testing
- Precise definition of each relevant test parameter, such as mass, temperature, time or drop height
- Exact step-by-step definition of the test procedure
- Parameters for assessing the test result, such as the onset of mechanical losses, changes in the material, number of cycles, etc.
- List of contiguous overarching standards such as UL or IEC

—
For more information on the PMA test procedures (DO), please contact your PMA supplier

Technical annex

Ingress protections according to IEC 60529



Ingress Protection Test for Static Applications

According to IEC EN 60529 standard and PMA DO 7.3-1160-00 test procedures. IEC EN 60529 describes various levels of system ingress protection against both water and dust. IP*7 and IP*8 are sealing ratings for a system fully immersed under water. IP*7 is precisely defined as immersion to a depth of 1 meter for 30 minutes. An IP*8 rating indicates that the system remains dry after immersion to a depth > 1m and/or duration >30minutes. It is the intention of the standard that the time and depth of the test should be agree between customer and supplier according to the requirements of the application.



Ingress Protection Test for Dynamic Applications

According to PMA DO 9.21-4440 test procedures. This PMA internal procedure allows the sealing performance of a cable protection system which is in continuous motion to be tested. It is significantly more difficult to achieve an efficient and long-lasting seal against ingress of water for a dynamic system than for a static system. The test equipment simulates typical movement of a cable protection system while it is submerged under water.



PMA Products

			PMAFIX Pro	PMAFIX IP68+ WPS	PMAFIX IP68/ IP68GT	PMAFIX IP66	PMA Smart Line
	IPx4	Splash water from all directions	●	●	●	●	●
	IPx5	Jet water at any angle	●	●	●	●	●
	IPx6	Powerful jet water from any angle	●	●	●	●	●
	IPx7	Submersion (1m, 30 min.)	●	●	●	-	-
	IPx8	Submersion at time and pressure >IPx7	●	●	●	-	-
	IPx9	High pressure (up to 100 bar, 80°C) water from any angle	●	●*	●*	●*	●*








*IEC 60529 can be fulfilled without WPS (Water impact protection ring). PMA recommends the use of the WPS ring for trouble free practical applications

Technical annex

Ingress protections according to IEC 60529

Dust


Protection against contact and penetration of foreign objects
Degree of protection (contact/foreign bodies)

	0	No protection
	1	Objects greater than 50mm Ø, accidental touch by hands
	2	Objects greater than 12.5mm Ø, accidental touch by fingers
	3	Objects greater than 2.5mm Ø, e.g. tools/wires
	4	Objects greater than 1mm Ø, e.g. tools/wires
	5	Protected against dust - limited ingress (no harmful deposits)
	6	Totally protected against dust (dust-tight)

Water

Protection against fluids
Degree of protection (water)

	0	No protection
	1	Protected against vertically falling drops of water
	2	Protected against direct sprays of water 15° from vertical
	3	Protected against sprays of water to 60° from vertical
	4	Protected against water sprayed from all directions - limited ingress permitted
	5	Protected against low pressure jets of water from all directions - limited ingress permitted
	6	Protected against strong pressure jets of water, heavy seas - limited ingress permitted
	7	Protection against the effects of immersion between 15cm - 1m
	8	Protection against long periods of immersion under a quoted pressure, e.g. 2 bar at 24 hours
	9	IP69 Automotive standard DIN40050 and signifies resistance to high pressure jets of water (up to 80 bar) from any angle

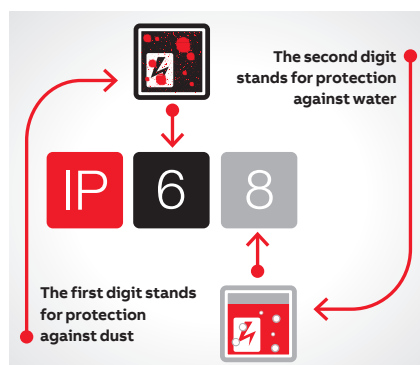


Technical annex

Table of thread dimensions


Metric fine thread - EN 60423

Metric	Pitch (mm)	Ø D1 (mm)	Ø D2 (mm)	Hole -0/+0.3 (mm)
12	1.5	12	10.16	12.0
16	1.5	16	14.16	16.0
20	1.5	20	18.16	20.0
25	1.5	25	23.16	25.0
32	1.5	32	30.16	32.0
40	1.5	40	38.16	40.0
50	1.5	50	48.16	50.0
63	1.5	63	61.16	63.0

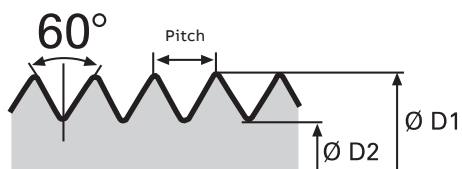


PG thread - DIN 40430

PG	Pitch (mm)	Ø D1 (mm)	Ø D2 (mm)	Hole (mm)
07	1.270	12.5	11.28	12.7
09	1.411	15.2	13.86	15.4
11	1.411	18.6	17.26	18.8
13	1.411	20.4	19.06	20.7
16	1.411	22.5	21.16	22.8
21	1.588	28.3	26.78	28.6
29	1.588	37.0	35.48	37.4
36	1.588	47.0	45.48	47.5
48	1.588	59.3	57.78	59.8

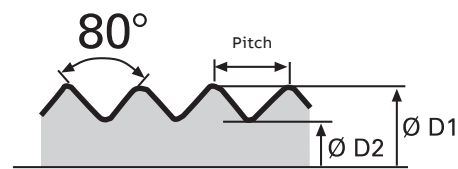


GAS pipe thread - DIN 259 Bl. 3, ISO 228/1

GAS	Pitch (mm)	Ø D1 (mm)	Ø D2 (mm)	Hole (mm)
¼"	1.337	13.157	11.445	13.4
⅜"	1.337	16.662	14.950	17.0
½"	1.814	20.955	18.631	21.3
¾"	1.814	26.441	24.117	26.8
1"	2.309	33.249	30.291	33.7
1¼"	2.309	41.910	38.952	42.4
1½"	2.309	47.803	44.845	48.3
2"	2.309	59.614	56.656	60.2

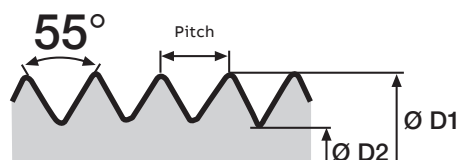

American standard taper pipe thread - ANSI/ASME B 1.20

NPT	Pitch (mm)	Ø D1 (mm)	Hole D2 (mm)
¼"	1.411	13.716	13.9
⅜"	1.411	17.145	17.4
½"	1.814	21.336	21.6
¾"	1.814	26.670	26.9
1"	2.209	33.401	33.7
1¼"	2.209	42.164	42.4
1½"	2.209	48.260	48.5
2"	2.209	60.325	60.6

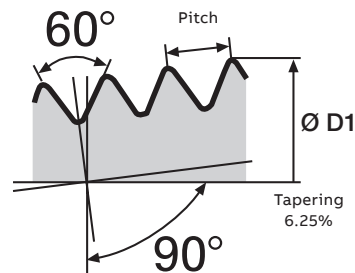

Technical annex

Comparison table

Conduit

Nominal width NW		
Standard	Metric	Inside Ø nom. (mm)
07	10	6.2
10	12	9.6
10	12	9.6
12	16	12.0
12	16	12.0
17	20	16.2
17	20	16.2
23	25	22.6
23	25	22.6
29	32	29.0
29	32	29.0
36	40	36.5
36	40	36.5
48	50	47.5
48	50	47.5

Connector metric


Inside diameter mm (nom.) ID		
Thread size	Metal thread	Polyamide thread
M12	-	8.0
M12	5.7	8.0
M16	9.6	11.0
M16	9.7	11.0
M20	13.5	13.0
M20	13.5	14.6
M25	18.3	19.0
M25	18.4	19.0
M32	24.2	24.0
M32	25.4	26.0
M40	31.4	32.0
M40	32.6	32.0
M50	39.5	39.0
M50	41.5	42.0
M63	51.4	53.0

Conduit

Nominal width NW		
Standard	Metric	Inside Ø nom. (mm)
07	10	6.2
10	12	9.6
12	16	12.0
-	-	-
17	20	16.2
23	25	22.6
29	32	29.0
36	40	36.5
-	-	-
48	50	47.5

Connector PG

Inside diameter mm (nom.) ID		
Thread size	Metal thread	Polyamide thread
PG07	-	8.0
PG09	9.5	10.0
PG11	12.5	13.0
PG13.5	14.5	14.5
PG16	16.5	17.5
PG21	22.0	22.5
PG29	30.0	30.5
PG36	40.0	37.5
PG42	-	46.0
PG48	49.5	50.0

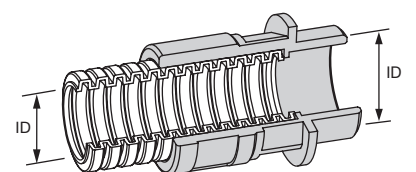

Inside diameter threads to inside diameter conduits.

Technical annex

Tightening torques

Recommended tightening torques for PMA fittings - For threaded bore holes and with lock nuts

Thread	Metal* [Nm]	Polyamide** [Nm]
M12	4.0	1.5
M16	4.0	3.0
M20	6.0	4.0
M25	8.0	6.0
M32	10.0	8.0
M40	15.0	9.0
M50	15.0	10.0
M63	15.0	10.0

* Thread combination: Metal + metal

** Thread combination: Metal + polyamide or polyamide + polyamide

Thread	Metal* [Nm]	Polyamide [Nm]
PG07	3.5	1.5
PG09	4.0	1.5
PG11	6.0	2.0
PG13.5	6.0	2.5
PG16	7.0	4.0
PG21	8.0	5.0
PG29	10.0	9.0
PG36	15.0	15.0
PG48	15.0	15.0

Strain relief fittings - According to EN 50262

Thread	Metal NVNZ-Mxxxx NKNZ-Mxxxx	Metal NVNZ-Mxxxx/P NKNZ-Mxxxx/P	Polyamide S/BVNZ-Mxxxx [Nm] EN
	[Nm] EN	[Nm]	
M12	5.0	6.0	0.9
M16	5.0	8.0	3.0
M20	7.5	10.0	4.0
M25	10.0	10.0	7.5
M32	15.0	15.0	10.0
M40	20.0	20.0	10.0
M50	20.0	20.0	10.0
M63	20.0	20.0	10.0

Note: These values were gauged at standard climate (23°C/50% relative humidity)

According to DIN VDE 0619

Thread	Metal NVNZ-Pxxxx	Metal NVNZ-Pxxxx/P	Polyamide S/BVNZ-Pxxxx [Nm]
	[Nm]	[Nm]	
PG07	6.25	6.0	2.5
PG09	6.25	8.0	3.75
PG11	6.25	10.0	3.75
PG13.5	6.25	10.0	3.75
PG16	7.5	10.0	5.0
PG21	10.0	15.0	7.5
PG29	10.0	20.0	7.5
PG36	10.0	30.0	7.5
PG48	10.0	40.0	7.5

Technical annex

Applications engineering information

Fill factor, relevant guidelines

The question of conduit capacity or fill factor arises in the use of cable protection systems. This describes the extent to which a conduit can or should be filled with cables and/or conductors based on the available cross-sectional area.

In all cases, PMA recommends that a conduit **capacity of 70%** not be exceeded. (Application-specific procedures and standards must also be considered.)

This ensures that operation is not unnecessarily impaired by increased friction between the individual conductors in dynamically moving systems. In addition, subsequent installation of additional conductors and/or cables is also possible if necessary.

Wiring installation: fixation



PMA AG recommends that cable protection systems be fastened with a spacing of **300mm to 500mm** between supports. This spacing can be varied depending on the application and location. This recommendation applies for all available dimensions. For larger diameters, the increased load due to the cables and conductors in the conduit is accounted for by adherence to the support spacing. PMA supplies suitable system supports for various strength requirements and applications.

European standard **EN 50343:2003-5.15** "Railway applications – Rolling stock – Rules for installation of cabling" specifies the following spacing between supports for fastening conductors:

Horizontal wiring: 300mm

Vertical wiring: 500mm

(Application specific guidelines and standards should also be considered.)

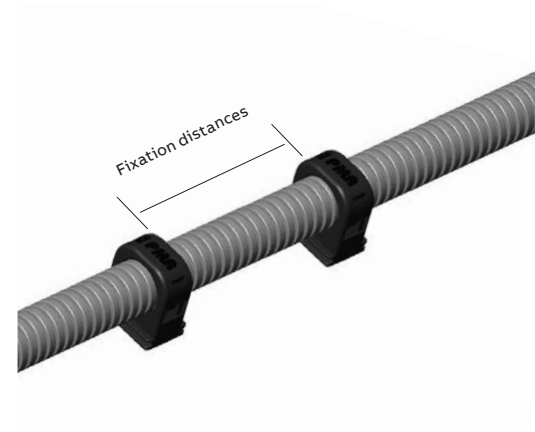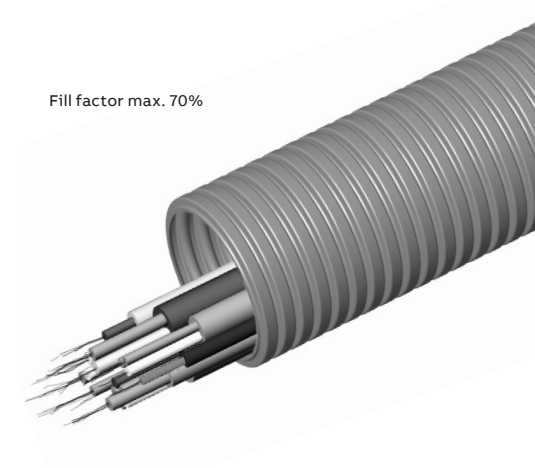

Technical annex

Chemical resistance

Chemical resistance comparison table

Resistance against	Chemical formula	PA6, Polyamide 6 PA6.6, Polyamide 6.6	PA12, Polyamide 12 PA11, Polyamide 11	PP, Polypropylene PE, Polyethylene	TPU	PFA PVDF
Acetic acid (10%)	C2H4O2	1	2	3	0	3
Acetone	C3H6O	3	3	3	0	3
Ammonia (30%)	NH3	3	3	3	0	3
Benzine	–	3	3	2	1	3
Brake fluid	–	3	3	3	0	3
Caustic soda	NaOH	3	3	3	1	3
Ethyl alcohol (40%)	C2H6O	3	3	3	1	3
Glycol	C2H6O2	3	3	3	0	3
Hydrochloric acid (10%)	HCL	0	1	3	0	3
Methanol	CH4O	2	3	3	1	3
Methyl ethyl ketone	C4H8O	3	3	3	0	3
Nitric acid (10%)	HNO3	0	0	2	0	3
Ozone	O3	2	2	2	1	3
Paint thinner	–	3	3	1	0	3
Perchloroethylene	C2Cl4	2	2	2	0	3
Paraffin	–	3	3	1	0	3
Phosphoric acid (10%)	H3O4P	1	2	3	0	3
Sea water	–	3	3	3	2	3
Soap solution	–	3	3	3	2	3
Sodium chloride	NaCl	3	3	3	3	3
Sulphuric acid (10%)	H2SO4	1	2	3	0	3
Toluene	C7H8	3	3	1	0	3
Trichlorethylene	C2HCl3	1	2	0	0	3
Turpentine	–	3	3	0	0	3
Urine	–	3	3	3	3	3

Resistance against oils and greases	Chemical formula	PA6, Polyamide 6 PA6.6, Polyamide 6.6	PA12, Polyamide 12 PA11, Polyamide 11	PP, Polypropylene PE, Polyethylene	TPU	PFA PVDF
Cutting oils*	–	3	3	2	1	3
Diesel oil	–	3	3	2	2	3
ASTM Oil Nr. 3	–	3	3	2	1	3
Fuel oil	–	3	3	2	1	3
Hydraulic oils*	–	3	3	2	1	3
Mineral oils	–	3	3	2	3	3
Spark-erosion liquids	–	3	3	2	1	3
Skydrol	–	1	2	2	0	3
Transformer oils*	–	3	3	2	1	3

*Synthetic additives can affect the oil resistance of plastics. Please contact PMA for further information

Key:

3 = Excellent resistance/suitable for permanent contact

2 = Resistant/suitable for occasional contact

1 = Relatively resistant/suitable for short-term contact

0 = Not recommended

Important

The chemical resistance of plastic products is also dependant on factors such as temperature, amount of time exposed to chemicals (e.g. occasional contact or immersed) as well as the concentration of the specific chemicals. The stated chemical resistances are valid for a temperature of 20°C. The chemical resistance table above serves only as a guide for the use of polyamide products in conjunction with the listed chemicals. Each specific application should be controlled for suitability by the end-user.

Index

Products in alphabetical order

Part. no.	GID no.	Page	Part. no.	GID no.	Page	Part. no.	GID no.	Page
0709M	7TAA292550R0000	108	514-M12	7TAA292690R0009	109	ALND-M638	7TAA292000R0037	144
0907M	7TAA292550R0001	108	514-M16	7TAA292690R0010	109	ALND-P070	7TAA292000R0038	144
0911M	7TAA292550R0002	108	514-M20	7TAA292690R0011	109	ALND-P090	7TAA292000R0039	144
0913M	7TAA292550R0003	108	514-M25	7TAA292690R0012	109	ALND-P092	7TAA292000R0040	144
1107M	7TAA292550R0004	108	514-M32	7TAA292690R0013	109	ALND-P110	7TAA292000R0041	144
1109M	7TAA292550R0005	108	514-M40	7TAA292690R0014	109	ALND-P112	7TAA292000R0042	144
1109N	7TAA292550R0006	107	514-M50	7TAA292690R0015	109	ALND-P132	7TAA292000R0043	144
1113M	7TAA292550R0007	108	514-M63	7TAA292690R0016	109	ALND-P137	7TAA292000R0044	144
1116M	7TAA292550R0008	108	AFN2-07GT	7TAA292700R0000	105	ALND-P167	7TAA292000R0045	144
1121M	7TAA292550R0009	108	AFN2-10GT	7TAA292700R0001	105	ALND-P213	7TAA292000R0046	144
1307M	7TAA292550R0010	108	AFN2-12GT	7TAA292700R0002	105	ALND-P299	7TAA292000R0047	144
1309M	7TAA292550R0011	108	AFN2-17GT	7TAA292700R0003	105	ALND-P366	7TAA292000R0048	144
1309N	7TAA292550R0012	107	AFN2-23GT	7TAA292700R0004	105	ALND-P488	7TAA292000R0049	144
1311M	7TAA292550R0013	108	AFN2-29GT	7TAA292700R0005	105	ALWD-M120	7TAA292000R0050	144
1311N	7TAA292550R0014	107	AFN2-36GT	7TAA292700R0006	105	ALWD-M160	7TAA292000R0051	144
1316M	7TAA292550R0015	108	AFN2-48GT	7TAA292700R0007	105	ALWD-M162	7TAA292000R0052	144
1321M	7TAA292550R0016	108	ALAD-M120	7TAA292000R0000	143	ALWD-M202	7TAA292000R0053	144
1607M	7TAA292550R0017	108	ALAD-M160	7TAA292000R0001	143	ALWD-M207	7TAA292000R0054	144
1609M	7TAA292550R0018	108	ALAD-M162	7TAA292000R0002	143	ALWD-M253	7TAA292000R0055	144
1609N	7TAA292550R0019	107	ALAD-M202	7TAA292000R0003	143	ALWD-M257	7TAA292000R0056	144
1611M	7TAA292550R0020	108	ALAD-M207	7TAA292000R0004	143	ALWD-M323	7TAA292000R0057	144
1611N	7TAA292550R0021	107	ALAD-M253	7TAA292000R0005	143	ALWD-M329	7TAA292000R0058	144
1613M	7TAA292550R0022	108	ALAD-M257	7TAA292000R0006	143	ALWD-M406	7TAA292000R0059	144
1613N	7TAA292550R0023	107	ALAD-M323	7TAA292000R0007	143	ALWD-M409	7TAA292000R0060	144
1621M	7TAA292550R0024	108	ALAD-M329	7TAA292000R0008	143	ALWD-M506	7TAA292000R0061	144
1629M	7TAA292550R0025	108	ALAD-M406	7TAA292000R0009	143	ALWD-M508	7TAA292000R0062	144
2111M	7TAA292550R0026	108	ALAD-M409	7TAA292000R0010	143	ALWD-M638	7TAA292000R0063	144
2113M	7TAA292550R0027	108	ALAD-M506	7TAA292000R0011	143	ALWD-P070	7TAA292000R0064	145
2113N	7TAA292550R0028	107	ALAD-M508	7TAA292000R0012	143	ALWD-P090	7TAA292000R0065	145
2116M	7TAA292550R0029	108	ALAD-M638	7TAA292000R0013	143	ALWD-P092	7TAA292000R0066	145
2116N	7TAA292550R0030	107	ALAD-P090	7TAA292000R0014	145	ALWD-P110	7TAA292000R0067	145
2129M	7TAA292550R0031	108	ALAD-P112	7TAA292000R0015	145	ALWD-P112	7TAA292000R0068	145
2916M	7TAA292550R0032	108	ALAD-P132	7TAA292000R0016	145	ALWD-P130	7TAA292000R0069	145
2921M	7TAA292550R0033	108	ALAD-P137	7TAA292000R0017	145	ALWD-P132	7TAA292000R0070	145
2921N	7TAA292550R0034	107	ALAD-P167	7TAA292000R0018	145	ALWD-P137	7TAA292000R0071	145
2936M	7TAA292550R0035	108	ALAD-P213	7TAA292000R0019	145	ALWD-P167	7TAA292000R0072	145
3621M	7TAA292550R0036	108	ALAD-P299	7TAA292000R0020	145	ALWD-P213	7TAA292000R0073	145
3629M	7TAA292550R0037	108	ALAD-P366	7TAA292000R0021	145	ALWD-P299	7TAA292000R0074	145
3629N	7TAA292550R0038	107	ALAD-P488	7TAA292000R0022	145	ALWD-P366	7TAA292000R0075	145
4229M	7TAA292550R0039	108	ALND-M120	7TAA292000R0023	144	ALWD-P488	7TAA292000R0078	145
4236M	7TAA292550R0040	108	ALND-M160	7TAA292000R0024	144	B.PX.12SW	-	150
4248M	7TAA292550R0041	108	ALND-M162	7TAA292000R0025	144	B.PX.15SW	-	150
4836M	7TAA292550R0042	108	ALND-M200	7TAA292000R0026	144	B.PX.30SW	-	150
4842M	7TAA292550R0043	108	ALND-M202	7TAA292000R0027	144	BAVD-12/10GT	7TAA292580R0000	91
514-07	7TAA292690R0000	109	ALND-M207	7TAA292000R0028	144	BAVD-17/10GT	7TAA292580R0001	91
514-09	7TAA292690R0001	109	ALND-M253	7TAA292000R0029	144	BAVD-17/12GT	7TAA292580R0002	91
514-11	7TAA292690R0002	109	ALND-M257	7TAA292000R0030	144	BAVD-23/10GT	7TAA292580R0003	91
514-13	7TAA292690R0003	109	ALND-M323	7TAA292000R0031	144	BAVD-23/12GT	7TAA292580R0004	91
514-16	7TAA292690R0004	109	ALND-M329	7TAA292000R0032	144	BAVD-23/17GT	7TAA292580R0005	91
514-21	7TAA292690R0005	109	ALND-M406	7TAA292000R0033	144	BAVD-29/10GT	7TAA292580R0006	91
514-29	7TAA292690R0006	109	ALND-M409	7TAA292000R0034	144	BAVD-29/12GT	7TAA292580R0007	91
514-36	7TAA292690R0007	109	ALND-M506	7TAA292000R0035	144	BAVD-29/17GT	7TAA292580R0008	91
514-48	7TAA292690R0008	109	ALND-M508	7TAA292000R0036	144	BAVD-29/23GT	7TAA292580R0009	91

Index

Products in alphabetical order

Part. no.	GID no.	Page	Part. no.	GID no.	Page	Part. no.	GID no.	Page
BAVD-36/29GT	7TAA292580R0010	91	BGG-P3656	7TAA292860R0005	129	BGPM-2x23	7TCA292000R9960	113
BAVD-48/36GT	7TAA292580R0011	91	BGGV-56	7TAA292860R0006	128	BGPM-2x29	-	113
BAVR-10/07	7TAA292580R0013	91	BGGV-70	7TAA292860R0007	128	BGPM-2x36	7TCA292001R0084	113
BAVR-12/10	7TAA292580R0014	91	BGGV-95	7TAA292860R0008	128	BGPM-2x48	-	113
BAVR-17/10	7TAA292580R0015	91	BGH-23	7TAA292720R0014	116	BGPM-3x12	-	113
BAVR-17/12	7TAA292580R0016	91	BGH-29	7TAA292720R0015	116	BGPM-3x17	7TCA292001R0085	113
BAVR-23/10	7TAA292580R0017	91	BGH-36	7TAA292720R0016	116	BGPM-3x23	7TCA292001R0086	113
BAVR-23/12	7TAA292580R0018	91	BGH-48	7TAA292720R0017	116	BGPM-3x29	7TCA292001R0087	113
BAVR-23/17	7TAA292580R0019	91	BGH-56	7TAA292720R0018	116	BGPM-3x36	7TCA292000R9961	113
BAVR-29/10	7TAA292580R0020	91	BGH-70	7TAA292720R0019	116	BGPM-3x48	7TCA292001R0088	113
BAVR-29/12	7TAA292580R0021	91	BGH-95	7TAA292720R0020	116	BGPM-4x12	-	113
BAVR-29/17	7TAA292580R0022	91	BGI-M7556	7TAA292860R0009	126	BGPM-4x17	-	113
BAVR-29/23	7TAA292580R0023	91	BGL-07	7TAA292720R0021	116	BGPM-4x23	7TCA292001R0089	113
BAVR-36/29	7TAA292580R0024	91	BGL-10	7TAA292720R0022	116	BGPM-4x29	-	113
BAVR-48/36	7TAA292580R0025	91	BGL-12	7TAA292720R0023	116	BGPM-4x36	7TCA292001R0090	113
BCT-10	7TAA292860R0045	119	BGL-17	7TAA292720R0024	116	BGPM-4x48	7TCA292001R0091	113
BCT-12	7TAA292860R0046	119	BGL-23	7TAA292720R0025	116	BGPMK-10/7-3	-	112
BCT-17	7TAA292860R0047	119	BGL-29	7TAA292720R0026	116	BGPMK-12/9-5	-	112
BCT-23	7TAA292860R0048	119	BGN-S12T	7TAA292680R0000	114	BGPMK-17/12-8	-	112
BCT-29	7TAA292860R0049	119	BGN-S17G	7TAA292680R0001	114	BGPMK-17/15-11	-	112
BCT-36	7TAA292860R0050	119	BGN-S17T	7TAA292680R0002	114	BGPMK-23/18-14	-	112
BFH-07-0	7TAA292700R0009	115	BGN-S23G	7TAA292680R0003	114	BGPMK-23/20-16	-	112
BFH-10-0	7TAA292700R0011	115	BGN-S23T	7TAA292680R0004	114	BGPMK-29/22-18	-	112
BFH-12-0	7TAA292700R0012	115	BGN-S29G	7TAA292680R0005	114	BGPMK-29/25-21	-	112
BFH-17-0	7TAA292700R0013	115	BGN-S29T	7TAA292680R0006	114	BGPMK-36/28-24	7TCA292001R0192	112
BFH-23-0	7TAA292700R0015	115	BGN-S36G	7TAA292680R0007	114	BGPMK-36/31-37	-	112
BFH-29-0	7TAA292700R0017	115	BGN-S36T	7TAA292680R0008	114	BGPMK-36/34-30	7TCA292001R0193	112
BFH-36-0	7TAA292700R0018	115	BGN-S48G	7TAA292680R0009	114	BGPMK-48/46-42	-	112
BFH-48-0	7TAA292700R0020	115	BGN-S48T	7TAA292680R0010	114	BGPMK-48/43-39	-	112
BFHS-00	7TAA292700R0022	115	BGN-S70G	7TAA292680R0011	114	BGPMK-48/40-36	-	112
BFHS-PH	7TAA292700R0024	115	BGO-56	7TAA292860R0010	127	BGPMK-48/37-33	-	112
BFHS-PH1	7TAA292700R0025	115	BGO-70	7TAA292860R0011	127	BGPMR-10T/17	7TCA292000R9962	113
BFIL-P070	7TAA292610R0003	87	BGO-95	7TAA292860R0012	127	BGPMR-12T/17	7TCA292000R9963	113
BFIL-P07M	7TAA292610R0004	87	BGOV-56	7TAA292860R0013	128	BGPMR-17GT/23	7TCA292001R0092	113
BFIL-P090	7TAA292610R0005	87	BGOV-70	7TAA292860R0014	128	BGPMR-23GT/29	7TCA292001R0093	113
BFIL-P112	7TAA292610R0006	87	BGOV-95	7TAA292860R0015	128	BGPMR-29GT/36	7TCA292000R9964	113
BFIL-P117	7TAA292610R0007	87	BGP-12/01	7TCA292000R6631	118	BGPMR-36GT/48	7TCA292001R0094	113
BFIL-P132	7TAA292610R0008	87	BGP-17	7TCA292000R6632	118	BGPS-12/01	7TCA292000R5539	118
BFIL-P137	7TAA292610R0009	87	BGP-23	7TCA292000R6633	118	BGPS-17	7TAA292860R0027	118
BFIL-P160	7TCA292000R0600	87	BGP-29	7TCA292000R6634	118	BGPS-23	7TAA292860R0028	118
BFIL-P167	7TAA292610R0010	87	BGP-3x48	7TCA292000R8706	118	BGPS-29	7TAA292860R0029	118
BFIL-P213	7TAA292610R0011	87	BGP-36	7TCA292000R6635	118	BGPS-36	7TAA292860R0030	118
BFIL-P217	7TAA292610R0012	87	BGP-48	7TCA292000R6636	118	BGPS-48	7TAA292860R0031	118
BFIL-P293	7TCA292000R0601	87	BGP-56G	7TAA292860R0026	118	BGPS-56	7TAA292860R0032	118
BFIL-P299	7TAA292610R0013	87	BGPM-1x10	-	113	BKIHG-U212	7TAA292400R0028	47
BFIL-P366	7TAA292610R0014	87	BGPM-1x12	7TCA292001R0082	113	BKIHG-U217	7TAA292400R0029	47
BFIL-P369	7TCA292000R0602	87	BGPM-1x17	7TCA292000R9956	113	BKIHG-U242	7TAA292400R0030	47
BFIL-P488	7TAA292610R0015	87	BGPM-1x23	7TCA292000R9957	113	BKIHG-U243	7TAA292400R0031	47
BGG-125	7TAA292860R0000	127	BGPM-1x29	7TCA292001R0083	113	BKIHG-U247	7TAA292400R0032	47
BGG-56	7TAA292860R0001	127	BGPM-1x36	7TCA292000R9958	113	BKIHG-U292	7TAA292400R0033	47
BGG-70	7TAA292860R0002	127	BGPM-1x48	7TCA292000R9959	113	BKIHG-U293	7TAA292400R0034	47
BGG-95	7TAA292860R0003	127	BGPM-2x12	-	113	BKIHG-U297	7TAA292400R0035	47
BGG-M6356	7TAA292860R0004	129	BGPM-2x17	-	113	BKIHG-U299	7TAA292400R0036	47

Index

Products in alphabetical order

Part. no.	GID no.	Page	Part. no.	GID no.	Page	Part. no.	GID no.	Page
BKIHG-U353	7TAA292400R0037	47	BMN-M16	7TAA292670R0021	110	BVAV-N027	7TAA292150R0078	80
BKIHG-U357	7TAA292400R0038	47	BMN-M20	7TAA292670R0022	110	BVAV-N043	7TAA292150R0077	80
BKIHG-U359	7TAA292400R0039	47	BMN-M25	7TAA292670R0023	110	BVAV-N069	7TAA292150R0078	80
BKIHG-U433	7TAA292400R0040	47	BMN-M32	7TAA292670R0024	110	BVAV-N078	7TAA292150R0079	80
BKIHG-U439	7TAA292400R0041	47	BMN-M40	7TAA292670R0025	110	BVAV-N088	7TAA292150R0080	80
BKIHG-U503	7TAA292400R0042	47	BMN-M50	7TAA292670R0026	110	BVAV-N098	7TAA292150R0081	80
BKIHG-U506	7TAA292400R0043	47	BMN-M63	7TAA292670R0027	110	BVAV-P090	7TAA292150R0082	72
BKIHG-U508	7TAA292400R0044	47	BREIR-U2916	7TAA292920R0007	152	BVAV-P112	7TAA292150R0083	72
BKIHG-U509	7TAA292400R0045	47	BREIR-U3516	7TCA292000R0853	152	BVAV-P132	7TAA292150R0084	72
BKIHG-U566	7TAA292400R0046	47	BSS-17	7TAA292850R0013	120	BVAV-P137	7TAA292150R0085	72
BKIHG-U568	7TAA292400R0047	47	BSS-23	7TAA292850R0014	120	BVAV-P167	7TAA292150R0086	72
BLN-M16	7TAA292740R0000	135	BSS-29	7TAA292850R0015	120	BVAV-P213	7TAA292150R0087	72
BLN-M20	7TAA292740R0001	135	BSS-36	7TAA292850R0016	120	BVAV-P299	7TAA292150R0088	72
BLN-M25	7TAA292740R0002	135	BSS-48	7TAA292850R0017	120	BVAV-P366	7TAA292150R0089	72
BLN-M32	7TAA292740R0003	135	BSS-56G	7TAA292850R0018	120	BVAV-P488	7TAA292150R0090	72
BLN-M40	7TAA292740R0004	135	BSV-70G	7TAA292850R0019	120	BVBD-M207GT	7TAA292150R0091	59
BLN-M50	7TAA292740R0005	135	BVAD-M120GT	7TAA292150R0032	58	BVBD-M253GT	7TAA292150R0092	59
BLNO-M160	7TAA292740R0006	135	BVAD-M160GT	7TAA292150R0033	58	BVBD-M257GT	7TAA292150R0093	59
BLNO-M162	7TAA292740R0007	135	BVAD-M162GT	7TAA292150R0034	58	BVBD-M323GT	7TAA292150R0094	59
BLNO-M202	7TAA292740R0008	135	BVAD-M202GT	7TAA292150R0035	58	BVBD-M329GT	7TAA292150R0095	59
BLNO-M207	7TAA292740R0009	135	BVAD-M207GT	7TAA292150R0036	58	BVBD-M406GT	7TAA292150R0096	59
BLNO-M253	7TAA292740R0010	135	BVAD-M253GT	7TAA292150R0037	58	BVBD-M409GT	7TAA292150R0097	59
BLNO-M257	7TAA292740R0011	135	BVAD-M329GT	7TAA292150R0038	58	BVBD-M506GT	7TAA292150R0098	59
BLNO-M323	7TAA292740R0012	135	BVAD-M406GT	7TAA292150R0039	58	BVBD-M508GT	7TAA292150R0099	59
BLNO-M329	7TAA292740R0013	135	BVAD-M506GT	7TAA292150R0040	58	BVBD-M638GT	7TAA292150R0100	59
BLNO-M406	7TAA292740R0014	135	BVAD-M508GT	7TAA292150R0041	58	BVBD-P167GT	7TAA292150R0101	73
BLNO-M409	7TAA292740R0015	135	BVAD-M638GT	7TAA292150R0042	58	BVBD-P213GT	7TAA292150R0102	73
BLNO-M508	7TAA292740R0016	135	BVAD-N022GT	7TAA292150R0043	80	BVBD-P299GT	7TAA292150R0103	73
BLSGO-101010	7TCA292000R9460	137	BVAD-N027GT	7TAA292150R0044	80	BVBD-P366GT	7TAA292150R0104	73
BLSGO-121212	7TCA292000R9461	137	BVAD-N043GT	7TAA292150R0045	80	BVBD-P488GT	7TAA292150R0105	73
BLSGO-171717	7TCA292000R9462	137	BVAD-N069GT	7TAA292150R0046	80	BVBV-M207	7TAA292150R0106	59
BLSGO-232323	7TCA292000R9463	137	BVAD-N078GT	7TAA292150R0047	80	BVBV-M253	7TAA292150R0107	59
BLTO-070707	7TCA292000R4700	136	BVAD-N088GT	7TAA292150R0048	80	BVBV-M257	7TAA292150R0108	59
BLTO-101010	7TCA292000R4701	136	BVAD-P090GT	7TAA292150R0049	72	BVBV-M323	7TAA292150R0109	59
BLTO-121212	7TCA292000R4702	136	BVAD-P112GT	7TAA292150R0050	72	BVBV-M329	7TAA292150R0110	59
BLTO-171717	7TCA292000R4703	136	BVAD-P132GT	7TAA292150R0051	72	BVBV-M406	7TAA292150R0111	59
BLTO-232323	7TCA292000R4704	136	BVAD-P137GT	7TAA292150R0052	72	BVBV-M409	7TAA292150R0112	59
BLTO-292929	7TCA292000R4705	136	BVAD-P167GT	7TAA292150R0053	72	BVBV-M506	7TAA292150R0113	59
BLYO-100707	7TCA292000R4706	136	BVAD-P213GT	7TAA292150R0054	72	BVBV-M508	7TAA292150R0114	59
BLYO-121010	7TCA292000R4707	136	BVAD-P299GT	7TAA292150R0055	72	BVBV-M638	7TAA292150R0115	59
BLYO-171212	7TCA292000R4708	136	BVAD-P366GT	7TAA292150R0056	72	BVBV-P167	7TAA292150R0116	73
BLYO-231717	7TCA292000R4709	136	BVAD-P488GT	7TAA292150R0057	72	BVBV-P213	7TAA292150R0117	73
BLYO-292917	7TCA292000R4710	136	BVAV-M160	7TAA292150R0065	58	BVBV-P299	7TAA292150R0118	73
BMN-07	7TAA292670R0008	110	BVAV-M162	7TAA292150R0066	58	BVBV-P366	7TAA292150R0119	73
BMN-09	7TAA292670R0009	110	BVAV-M202	7TAA292150R0067	58	BVBV-P488	7TAA292150R0120	73
BMN-11	7TAA292670R0010	110	BVAV-M207	7TAA292150R0068	58	BVH-17-000	7TAA292700R0027	114
BMN-13	7TAA292670R0011	110	BVAV-M253	7TAA292150R0069	58	BVH-17-010	7TAA292700R0028	114
BMN-16	7TAA292670R0012	110	BVAV-M329	7TAA292150R0070	58	BVH-17-020	7TAA292700R0029	114
BMN-21	7TAA292670R0013	110	BVAV-M406	7TAA292150R0071	58	BVH-23-000	7TAA292700R0030	114
BMN-29	7TAA292670R0014	110	BVAV-M506	7TAA292150R0072	58	BVH-23-010	7TAA292700R0031	114
BMN-36	7TAA292670R0015	110	BVAV-M508	7TAA292150R0073	58	BVH-23-020	7TAA292700R0032	114
BMN-48	7TAA292670R0016	110	BVAV-M638	7TAA292150R0074	58	BVH-29-000	7TAA292700R0033	114
BMN-M12	7TAA292670R0020	110	BVAV-N022	7TAA292150R0075	80	BVH-29-010	7TAA292700R0034	114

Index

Products in alphabetical order

Part. no.	GID no.	Page	Part. no.	GID no.	Page	Part. no.	GID no.	Page
BVH-29-020	7TAA292700R0035	114	BVID-M329GT	7TAA292610R0021	85	BVIVG-U212	7TAA292610R0108	89
BVH-36-000	7TAA292700R0036	114	BVID-M406GT	7TAA292610R0022	85	BVIVG-U217	7TAA292610R0109	89
BVH-36-010	7TAA292700R0037	114	BVID-M508GT	7TAA292610R0023	85	BVIVG-U242	7TAA292610R0110	89
BVH-36-020	7TAA292700R0038	114	BVID-M638GT	7TAA292610R0024	85	BVIVG-U243	7TAA292610R0111	89
BVH-48-000	7TAA292700R0039	114	BVIRA-U150	7TAA292610R0080	88	BVIVG-U247	7TAA292610R0112	89
BVH-48-010	7TAA292700R0040	114	BVIRA-U152	7TAA292610R0081	88	BVIVG-U292	7TAA292610R0113	89
BVH-48-020	7TAA292700R0041	114	BVIRA-U15M	7TAA292610R0082	88	BVIVG-U293	7TAA292610R0114	89
BVIDA-U150GT	7TAA292610R0025	88	BVIRA-U180	7TAA292610R0083	88	BVIVG-U297	7TAA292610R0115	89
BVIDA-U152GT	7TAA292610R0026	88	BVIRA-U182	7TAA292610R0084	88	BVIVG-U299	7TAA292610R0116	89
BVIDA-U15MGT	7TAA292610R0027	88	BVIRA-U187	7TAA292610R0085	88	BVIVG-U349	7TCA292000R1035	89
BVIDA-U180GT	7TAA292610R0028	88	BVIRA-U232	7TAA292610R0086	88	BVIVG-U352	7TAA292610R0169	89
BVIDA-U182GT	7TAA292610R0029	88	BVIRA-U233	7TAA292610R0087	88	BVIVG-U353	7TAA292610R0117	89
BVIDA-U187GT	7TAA292610R0030	88	BVIRA-U237	7TAA292610R0088	88	BVIVG-U356	7TAA292610R0118	89
BVIDA-U232GT	7TAA292610R0031	88	BVIRA-U343	7TAA292610R0089	88	BVIVG-U357	7TAA292610R0119	89
BVIDA-U233GT	7TAA292610R0032	88	BVIRA-U347	7TAA292610R0090	88	BVIVG-U359	7TAA292610R0120	89
BVIDA-U237GT	7TAA292610R0033	88	BVIRA-U402	7TAA292610R0091	88	BVIVG-U433	7TAA292610R0121	89
BVIDA-U343GT	7TAA292610R0034	88	BVIRA-U403	7TAA292610R0092	88	BVIVG-U436	7TAA292610R0122	89
BVIDA-U347GT	7TAA292610R0035	88	BVIRA-U407	7TAA292610R0093	88	BVIVG-U437	7TAA292610R0123	89
BVIDA-U402GT	7TAA292610R0036	88	BVIRB-U162	7TAA292610R0094	88	BVIVG-U439	7TAA292610R0124	89
BVIDA-U403GT	7TAA292610R0037	88	BVIRB-U202	7TAA292610R0095	88	BVIVG-U503	7TAA292610R0125	89
BVIDA-U407GT	7TAA292610R0038	88	BVIRB-U232	7TAA292610R0096	88	BVIVG-U506	7TAA292610R0126	89
BVIDB-U162GT	7TAA292610R0039	88	BVIRB-U237	7TAA292610R0097	88	BVIVG-U508	7TAA292610R0127	89
BVIDB-U202GT	7TAA292610R0040	88	BVIRB-U267	7TAA292610R0098	88	BVIVG-U509	7TAA292610R0128	89
BVIDB-U232GT	7TAA292610R0041	88	BVIRB-U293	7TAA292610R0099	88	BVIVG-U563	7TAA292610R0129	89
BVIDB-U237GT	7TAA292610R0042	88	BVIRB-U297	7TAA292610R0100	88	BVIVG-U566	7TAA292610R0130	89
BVIDB-U267GT	7TAA292610R0043	88	BVIRB-U323	7TAA292610R0101	88	BVIVG-U568	7TAA292610R0131	89
BVIDB-U293GT	7TAA292610R0044	88	BVIRB-U353	7TAA292610R0102	88	BVIVG-U569	7TAA292610R0132	89
BVIDB-U297GT	7TAA292610R0045	88	BVIRB-U357	7TAA292610R0103	88	BVIVG-U628	7TCA292000R1039	89
BVIDB-U323GT	7TAA292610R0046	88	BVIRB-U359	7TAA292610R0104	88	BVND-G000GT	7TAA292150R0127	79
BVIDB-U353GT	7TAA292610R0047	88	BVIR-M160	7TAA292610R0066	85	BVND-G00MGT	7TAA292150R0128	79
BVIDB-U357GT	7TAA292610R0048	88	BVIR-M162	7TAA292610R0067	85	BVND-G010GT	7TAA292150R0129	79
BVIDB-U359GT	7TAA292610R0049	88	BVIR-M202	7TAA292610R0068	85	BVND-G012GT	7TAA292150R0130	79
BVIDG-U212GT	7TAA292610R0050	89	BVIR-M207	7TAA292610R0069	85	BVND-G022GT	7TAA292150R0131	79
BVIDG-U217GT	7TAA292610R0051	89	BVIR-M253	7TAA292610R0070	85	BVND-G027GT	7TAA292150R0132	79
BVIDG-U242GT	7TAA292610R0052	89	BVIR-M257	7TAA292610R0071	85	BVND-G043GT	7TAA292150R0133	79
BVIDG-U247GT	7TAA292610R0053	89	BVIR-M329	7TAA292610R0072	85	BVND-G069GT	7TAA292150R0134	79
BVIDG-U293GT	7TAA292610R0054	89	BVIR-M406	7TAA292610R0073	85	BVND-G078GT	7TAA292150R0135	79
BVIDG-U297GT	7TAA292610R0055	89	BVIR-M508	7TAA292610R0074	85	BVND-G088GT	7TAA292150R0136	79
BVIDG-U353GT	7TAA292610R0056	89	BVIR-M638	7TAA292610R0075	85	BVND-G098GT	7TAA292150R0137	79
BVIDG-U357GT	7TAA292610R0057	89	BVIR-P070	7TAA292610R0078	85	BVND-M120GT	7TAA292150R0138	57
BVIDG-U359GT	7TAA292610R0058	89	BVIR-P090	7TAA292610R0077	85	BVND-M12MGT	7TAA292150R0139	57
BVIDG-U433GT	7TAA292610R0059	89	BVIR-P112	7TAA292610R0078	85	BVND-M160GT	7TAA292150R0140	57
BVIDG-U436GT	7TAA292610R0060	89	BVIR-P167	7TAA292610R0079	85	BVND-M162GT	7TAA292150R0141	57
BVIDG-U439GT	7TAA292610R0061	89	BVIRS-U162	7TCA292000R0041	88	BVND-M200GT	7TAA292150R0142	57
BVIDG-U506GT	7TAA292610R0062	89	BVIRS-U202	7TCA292000R0042	88	BVND-M202GT	7TAA292150R0144	57
BVIDG-U509GT	7TAA292610R0063	89	BVIRS-U237	7TCA292000R0043	88	BVND-M203GT	7TAA292150R0150	57
BVIDG-U566GT	7TAA292610R0064	89	BVIRS-U267	7TCA292000R0044	88	BVND-M207GT	7TAA292150R0147	57
BVIDG-U569GT	7TAA292610R0065	89	BVIRS-U293	7TCA292000R0045	88	BVND-M253GT	7TAA292150R0149	57
BVID-M12MGT	7TAA292610R0016	85	BVIRS-U323	7TCA292000R0046	88	BVND-M257GT	7TAA292150R0150	57
BVID-M160GT	7TAA292610R0017	85	BVIRS-U359	7TCA292000R0047	88	BVND-M323GT	7TAA292150R0152	57
BVID-M162GT	7TAA292610R0018	85	BVIVG-U152	7TAA292610R0105	89	BVND-M329GT	7TAA292150R0154	57
BVID-M207GT	7TAA292610R0019	85	BVIVG-U187	7TAA292610R0106	89	BVND-M406GT	7TAA292150R0156	57
BVID-M253GT	7TAA292610R0020	85	BVIVG-U210	7TAA292610R0107	89	BVND-M409GT	7TAA292150R0157	57

Index

Products in alphabetical order

Part. no.	GID no.	Page	Part. no.	GID no.	Page	Part. no.	GID no.	Page
BVND-M506GT	7TAA292150R0159	57	BVND-P488GT	7TAA292150R0202	71	BVNV-G043	7TAA292150R0262	79
BVND-M508GT	7TAA292150R0160	57	BVNDZ-M160GT	7TAA292150R0204	58	BVNV-G069	7TAA292150R0263	79
BVND-M638GT	7TAA292150R0161	57	BVNDZ-M162GT	7TAA292150R0205	58	BVNV-G078	7TAA292150R0264	79
BVND-N022GT	7TAA292150R0162	80	BVNDZ-M207GT	7TAA292150R0206	58	BVNV-G088	7TAA292150R0265	79
BVND-N027GT	7TAA292150R0163	80	BVNDZ-M253GT	7TAA292150R0207	58	BVNV-G098	7TAA292150R0266	79
BVND-N043GT	7TAA292150R0164	80	BVNDZ-M329GT	7TAA292150R0208	58	BVNV-M120	7TAA292150R0267	57
BVND-N069GT	7TAA292150R0165	80	BVNDZ-M406GT	7TAA292150R0209	58	BVNV-M12M	7TAA292150R0268	57
BVND-N078GT	7TAA292150R0166	80	BVNDZ-M508GT	7TAA292150R0210	58	BVNV-M160	7TAA292150R0269	57
BVND-N088GT	7TAA292150R0167	80	BVNDZ-M638GT	7TAA292150R0211	58	BVNV-M162	7TAA292150R0270	57
BVND-N098GT	7TAA292150R0168	80	BVNDZ-P090GT	7TAA292150R0212	72	BVNV-M200	7TAA292150R0272	57
BVND-P070GT-11	7TAA292150R0169	71	BVNDZ-P112GT	7TAA292150R0213	72	BVNV-M202	7TAA292150R0273	57
BVND-P070GT-8	7TAA292150R0170	71	BVNDZ-P132GT	7TAA292150R0214	72	BVNV-M203	7TAA292150R0274	57
BVND-P072GT-11	7TAA292150R0171	71	BVNDZ-P137GT	7TAA292150R0215	72	BVNV-M207	7TAA292150R0275	57
BVND-P072GT-8	7TAA292150R0172	71	BVNDZ-P163GT	7TAA292150R0216	72	BVNV-M253	7TAA292150R0277	57
BVND-P07MGT-11	7TAA292150R0173	71	BVNDZ-P167GT	7TAA292150R0217	72	BVNV-M257	7TAA292150R0279	57
BVND-P07MGT-8	7TAA292150R0174	71	BVNDZ-P213GT	7TAA292150R0218	72	BVNV-M323	7TAA292150R0281	57
BVND-P090GT-11	7TAA292150R0178	71	BVNDZ-P299GT	7TAA292150R0219	72	BVNV-M329	7TAA292150R0282	57
BVND-P090GT-8	7TAA292150R0177	71	BVNDZ-P366GT	7TAA292150R0220	72	BVNV-M406	7TAA292150R0283	57
BVND-P092GT-11	7TAA292150R0178	71	BVNDZ-P488GT	7TAA292150R0221	72	BVNV-M409	7TAA292150R0284	57
BVND-P092GT-8	7TCA292000R1057	71	BVNR-RE12	7TAA292150R0222	92	BVNV-M506	7TAA292150R0285	57
BVND-P097GT-11	7TAA292150R0179	71	BVNR-RE12-24	7TAA292150R0223	92	BVNV-M508	7TAA292150R0286	57
BVND-P097GT-8	7TCA292000R5693	71	BVNR-RE1317	7TAA292150R0224	92	BVNV-M638	7TAA292150R0287	57
BVND-P09MGT-11	7TAA292150R0180	71	BVNR-RE1317-28	7TAA292150R0225	92	BVNV-N022	7TAA292150R0289	80
BVND-P09MGT-8	7TCA292000R1058	71	BVNR-RE17	7TAA292150R0226	92	BVNV-N027	7TAA292150R0290	80
BVND-P110GT-11	7TAA292150R0181	71	BVNR-RE17-28	7TAA292150R0227	92	BVNV-N043	7TAA292150R0291	80
BVND-P110GT-8	7TAA292150R0182	71	BVNR-RE23	7TAA292150R0229	92	BVNV-N069	7TAA292150R0292	80
BVND-P112GT-11	7TAA292150R0183	71	BVNR-RE23-32	7TAA292150R0230	92	BVNV-N078	7TAA292150R0293	80
BVND-P112GT-8	7TAA292150R0184	71	BVNR-RE29	7TAA292150R0232	92	BVNV-N088	7TAA292150R0294	80
BVND-P117GT-11	7TAA292150R0185	71	BVNR-RE29-44	7TAA292150R0233	92	BVNV-N098	7TAA292150R0295	80
BVND-P117GT-8	7TCA292000R1060	71	BVNR-RE36	7TAA292150R0235	92	BVNV-P070	7TAA292150R0296	71
BVND-P11MGT-11	7TAA292150R0186	71	BVNR-RE36-50	7TAA292150R0236	92	BVNV-P072	7TCA292000R1118	71
BVND-P11MGT-8	7TCA292000R5694	71	BVNR-RE48	7TAA292150R0238	92	BVNV-P07M	7TAA292150R0297	71
BVND-P130GT-11	7TAA292150R0187	71	BVNR-RE48-65	7TAA292150R0239	92	BVNV-P090	7TAA292150R0298	71
BVND-P130GT-8	7TCA292000R1061	71	BVNR-REM162	7TAA292150R0240	92	BVNV-P092	7TAA292150R0299	71
BVND-P132GT-11	7TAA292150R0188	71	BVNR-REM162-24	7TAA292150R0241	92	BVNV-P097	7TAA292150R1288	71
BVND-P132GT-8	7TCA292000R1062	71	BVNR-REM187	7TAA292150R0242	92	BVNV-P09M	7TAA292150R0300	71
BVND-P137GT-11	7TAA292150R0189	71	BVNR-REM187-28	7TAA292150R0243	92	BVNV-P110	7TAA292150R0301	71
BVND-P137GT-8	7TCA292000R1064	71	BVNR-REM207	7TAA292150R0244	92	BVNV-P112	7TAA292150R0302	71
BVND-P13MGT-11	7TAA292150R0190	71	BVNR-REM207-28	7TAA292150R0245	92	BVNV-P117	7TAA292150R0303	71
BVND-P13MGT-8	7TCA292000R1065	71	BVNR-REM253	7TAA292150R0246	92	BVNV-P11M	7TAA292150R0304	71
BVND-P160GT-11	7TAA292150R0191	71	BVNR-REM253-32	7TAA292150R0247	92	BVNV-P130	7TAA292150R0305	71
BVND-P160GT-8	7TCA292000R5695	71	BVNR-REM329	7TAA292150R0248	92	BVNV-P132	7TAA292150R0306	71
BVND-P162GT-11	7TAA292150R0192	71	BVNR-REM329-44	7TAA292150R0249	92	BVNV-P137	7TAA292150R0307	71
BVND-P163GT-11	7TAA292150R0193	71	BVNR-REM406	7TAA292150R0250	92	BVNV-P13M	7TAA292150R0308	71
BVND-P163GT-8	7TCA292000R1066	71	BVNR-REM406-50	7TAA292150R0251	92	BVNV-P162	7TAA292150R0309	71
BVND-P167GT-11	7TAA292150R0194	71	BVNR-REM508	7TAA292150R0252	92	BVNV-P163	7TCA292000R1137	71
BVND-P167GT-8	7TAA292150R0195	71	BVNR-REM508-65	7TAA292150R0253	92	BVNV-P167	7TAA292150R0310	71
BVND-P213GT	7TAA292150R0196	71	BVNV-G000	7TAA292150R0256	79	BVNV-P213	7TAA292150R0311	71
BVND-P296GT	7TAA292150R0197	71	BVNV-G00M	7TAA292150R0257	79	BVNV-P296	7TAA292150R0312	71
BVND-P299GT	7TAA292150R0198	71	BVNV-G010	7TAA292150R0258	79	BVNV-P299	7TAA292150R0313	71
BVND-P366GT	7TAA292150R0199	71	BVNV-G012	7TAA292150R0259	79	BVNV-P366	7TAA292150R0314	71
BVND-P368GT	7TAA292150R0200	71	BVNV-G022	7TAA292150R0260	79	BVNV-P368	7TCA292000R1147	71
BVND-P428GT	7TAA292150R0201	71	BVNV-G027	7TAA292150R0261	79	BVNV-P428	7TAA292150R0315	71

Index

Products in alphabetical order

Part. no.	GID no.	Page	Part. no.	GID no.	Page	Part. no.	GID no.	Page
BVNV-P488	7TAA292150R0316	71	BVTR-484848	7TAA292150R0363	90	BVWD-P137GT-8	7TAA292150R0406	74
BVNZ-M162S	7TAA292150R0317	58	BVWD-G000GT	7TAA292150R0364	79	BVWD-P13MGT-11	7TAA292150R0407	74
BVNZ-M207S	7TAA292150R0318	58	BVWD-G00MGT	7TAA292150R0365	79	BVWD-P13MGT-8	7TCA292000R5707	74
BVNZ-M253S	7TAA292150R0319	58	BVWD-G010GT	7TAA292150R0366	79	BVWD-P167GT-11	7TAA292150R0408	74
BVNZ-M329S	7TAA292150R0320	58	BVWD-G012GT	7TAA292150R0367	79	BVWD-P167GT-8	7TAA292150R0409	74
BVNZ-M406S	7TAA292150R0321	58	BVWD-G022GT	7TAA292150R0368	79	BVWD-P213GT	7TAA292150R0410	74
BVNZ-M508S	7TAA292150R0322	58	BVWD-G027GT	7TAA292150R0369	79	BVWD-P299GT	7TAA292150R0411	74
BVNZ-M638S	7TAA292150R0323	58	BVWD-G043GT	7TAA292150R0370	79	BVWD-P366GT	7TAA292150R0412	74
BVNZ-P090S	7TAA292150R0327	72	BVWD-G069GT	7TAA292150R0371	79	BVWD-P488GT	7TAA292150R0413	74
BVNZ-P112S	7TAA292150R0328	72	BVWD-G078GT	7TAA292150R0372	79	BVWV-M120	7TAA292150R0425	59
BVNZ-P132S	7TAA292150R0329	72	BVWD-G088GT	7TAA292150R0373	79	BVWV-M12M	7TAA292150R0426	59
BVNZ-P137S	7TAA292150R0330	72	BVWD-G098GT	7TAA292150R0374	79	BVWV-M160	7TAA292150R0427	59
BVNZ-P163S	7TAA292150R0331	72	BVWD-M120GT	7TAA292150R0375	59	BVWV-M162	7TAA292150R0428	59
BVNZ-P167S	7TAA292150R0332	72	BVWD-M12MGT	7TAA292150R0378	59	BVWV-M202	7TAA292150R0429	59
BVNZ-P213S	7TAA292150R0333	72	BVWD-M160GT	7TAA292150R0377	59	BVWV-M207	7TAA292150R0430	59
BVNZ-P299S	7TAA292150R0334	72	BVWD-M162GT	7TAA292150R0378	59	BVWV-M253	7TAA292150R0431	59
BVNZ-P366S	7TAA292150R0335	72	BVWD-M200GT	7TAA292150R0379	59	BVWV-M329	7TAA292150R0432	59
BVNZ-P488S	7TAA292150R0336	72	BVWD-M202GT	7TAA292150R0380	59	BVWV-M406	7TAA292150R0433	59
BVOD-P167GT	7TAA292150R0337	85	BVWD-M207GT	7TAA292150R0381	59	BVWV-M508	7TAA292150R0434	59
BVOD-P213GT	7TAA292150R0338	85	BVWD-M253GT	7TAA292150R0382	59	BVWV-N022	7TAA292150R0435	81
BVOD-P299GT	7TAA292150R0339	85	BVWD-M329GT	7TAA292150R0383	59	BVWV-N027	7TAA292150R0436	81
BVOD-P366GT	7TAA292150R0340	85	BVWD-M406GT	7TAA292150R0384	59	BVWV-N043	7TAA292150R0437	81
BVOD-P488GT	7TAA292150R0341	85	BVWD-M508GT	7TAA292150R0385	59	BVWV-N069	7TAA292150R0438	81
BVOV-P167	7TAA292150R0342	85	BVWD-N022GT	7TAA292150R0386	81	BVWV-N078	7TAA292150R0439	81
BVOV-P213	7TAA292150R0343	85	BVWD-N027GT	7TAA292150R0387	81	BVWV-N088	7TAA292150R0440	81
BVOV-P299	7TAA292150R0344	85	BVWD-N043GT	7TAA292150R0388	81	BVWV-N098	7TAA292150R0441	81
BVOV-P366	7TAA292150R0345	85	BVWD-N069GT	7TAA292150R0389	81	BVWV-P070	7TAA292150R0442	74
BVOV-P488	7TAA292150R0346	85	BVWD-N078GT	7TAA292150R0390	81	BVWV-P072	7TCA292000R5709	74
BVSGD-1212GT	7TAA292300R0000	92	BVWD-N088GT	7TAA292150R0391	81	BVWV-P07M	7TAA292150R0443	74
BVSGD-1717GT	7TAA292300R0001	92	BVWD-N098GT	7TAA292150R0392	81	BVWV-P090	7TAA292150R0444	74
BVSGD-2323GT	7TAA292300R0002	92	BVWD-P070GT-11	7TAA292150R0393	74	BVWV-P092	7TAA292150R0445	74
BVSGD-2929GT	7TAA292300R0003	92	BVWD-P070GT-8	7TCA292000R1233	74	BVWV-P09M	7TAA292150R0446	74
BVSGD-3636GT	7TAA292300R0004	92	BVWD-P072GT-11	7TAA292150R0394	74	BVWV-P110	7TAA292150R0447	74
BVSGD-4848GT	7TAA292300R0005	92	BVWD-P072GT-8	7TCA292000R5702	74	BVWV-P112	7TAA292150R0448	74
BVSGR-1212	7TAA292300R0006	92	BVWD-P07MGT-11	7TAA292150R0395	74	BVWV-P11M	7TCA292000R1259	74
BVSGR-1717	7TAA292300R0007	92	BVWD-P07MGT-8	7TCA292000R5703	74	BVWV-P130	7TAA292150R0449	74
BVSGR-2323	7TAA292300R0008	92	BVWD-P090GT-11	7TAA292150R0396	74	BVWV-P132	7TAA292150R0450	74
BVSGR-2929	7TAA292300R0009	92	BVWD-P090GT-8	7TCA292000R1236	74	BVWV-P137	7TAA292150R0451	74
BVSGR-3636	7TAA292300R0010	92	BVWD-P092GT-11	7TAA292150R0397	74	BVWV-P13M	7TCA292000R1265	74
BVSGR-4848	7TAA292300R0011	92	BVWD-P092GT-8	7TCA292000R5704	74	BVWV-P167	7TAA292150R0452	74
BVTD-101010GT	7TAA292150R1292	90	BVWD-P09MGT-11	7TAA292150R0398	74	BVWV-P213	7TAA292150R0453	74
BVTD-121212GT	7TAA292150R1293	90	BVWD-P09MGT-8	7TCA292000R5705	74	BVWV-P299	7TAA292150R0454	74
BVTD-171717GT	7TAA292150R1294	90	BVWD-P110GT-11	7TAA292150R0399	74	BVWV-P366	7TAA292150R0455	74
BVTD-232323GT	7TAA292150R0347	90	BVWD-P110GT-8	7TCA292000R1238	74	BVWV-P488	7TAA292150R0456	74
BVTD-292929GT	7TAA292150R0348	90	BVWD-P112GT-11	7TAA292150R0400	74	BVYD-100707GT	7TAA292150R0457	90
BVTD-363636GT	7TAA292150R0349	90	BVWD-P112GT-8	7TAA292150R0401	74	BVYD-121010GT	7TAA292150R0458	90
BVTD-484848GT	7TAA292150R0350	90	BVWD-P11MGT-11	7TAA292150R0402	74	BVYD-171212GT	7TAA292150R0459	90
BVTR-101010	7TAA292150R0351	90	BVWD-P11MGT-8	7TCA292000R5706	74	BVYD-231717GT	7TAA292150R0460	90
BVTR-121212	7TAA292150R0353	90	BVWD-P130GT-11	7TAA292150R0403	74	BVYD-292323GT	7TAA292150R0461	90
BVTR-171717	7TAA292150R0355	90	BVWD-P130GT-8	7TCA292000R1239	74	BVYD-362929GT	7TAA292150R0462	90
BVTR-232323	7TAA292150R0358	90	BVWD-P132GT-11	7TAA292150R0404	74	BVYD-483636GT	7TAA292150R0463	90
BVTR-292929	7TAA292150R0359	90	BVWD-P132GT-8	7TCA292000R1240	74	BVYR-100707	7TAA292150R0464	90
BVTR-363636	7TAA292150R0361	90	BVWD-P137GT-11	7TAA292150R0405	74	BVYR-121010	7TAA292150R0465	90

Index

Products in alphabetical order

Part. no.	GID no.	Page	Part. no.	GID no.	Page	Part. no.	GID no.	Page
BVYR-171212	7TAA292150R0466	90	CYLT-17S	7TAA292240R0025	17	ESDT-10B	7TAA292240R0050	17
BVYR-231717	7TAA292150R0467	90	CYLT-23B	7TAA292240R0026	17	ESDT-12B	7TAA292240R0051	17
BVYR-292323	7TAA292150R0468	90	CYLT-23S	7TAA292240R0027	17	ESDT-17B	7TAA292240R0052	17
BVYR-362929	7TAA292150R0469	90	CYLT-29B	7TAA292240R0028	17	ESDT-23B	7TAA292240R0053	17
BVYR-483636	7TAA292150R0470	90	CYLT-29S	7TAA292240R0029	17	ESDT-29B	7TAA292240R0054	17
C.66.10GR	7TAA292910R0000	148	CYLT-36B	7TAA292240R0030	17	ESDT-36B	7TAA292240R0055	17
C.66.10SW	7TAA292910R0001	148	CYLT-36S	7TAA292240R0031	17	ESDT-48B	7TAA292240R0056	17
C.66.12GR	7TAA292910R0002	148	CYLT-48B	7TAA292240R0032	17	EWZ-02	7TAA292880R0000	120
C.66.12SW	7TAA292910R0003	148	CYLT-48S	7TAA292240R0033	17	EWZ-03	7TAA292880R0001	120
C.66.16GR	7TAA292910R0004	148	E 150p7	7TCA292000R9071	44,45	F.304.10	7TAA292910R0015	153
C.66.16SW	7TAA292910R0005	148	E 150p8	7TCA292000R9074	44,45	F.304.12	7TAA292910R0016	153
C.66.20GR	7TAA292910R0006	148	E 150p9	7TCA292000R9075	44,45	F.304.17	7TAA292910R0017	153
C.66.20SW	7TAA292910R0007	148	E151P11	7TCA292000R9117	78	F.304.23	7TAA292910R0018	153
C.66.25GR	7TAA292910R0008	148	E151P7	7TCA292000R9115	78	F.304.29	7TAA292910R0019	153
C.66.25SW	7TAA292910R0009	148	E151P9	7TCA292000R9116	78	F.304.36	7TAA292910R0020	153
C.66.30GR	7TAA292910R0010	148	E 152p11	7TCA292000R9081	44,45	F.304.48	7TAA292910R0021	153
C.66.30SW	7TAA292910R0011	148	E 152p13	7TCA292000R9083	44,45	F.66.04GR	7TAA292910R0024	148
C.66.40GR	7TAA292910R0012	148	E 152p7	7TCA292000R9078	44,45	F.66.04SW	7TAA292910R0025	148
C.66.40SW	7TAA292910R0013	148	E 152p9	7TCA292000R9077	44,45	F.66.06GR	7TAA292910R0026	148
C.66.45SW	7TAA292910R0014	148	E 153p11	7TCA292000R9090	44,62,78	F.66.06SW	7TAA292910R0027	148
CUSG-17B	7TAA292490R0000	31	E 153p13	7TCA292000R9091	44,45	F.66.08GR	7TAA292910R0028	148
CUSG-17S	7TCA292000R1523	31	E 153p16	7TCA292000R9092	44,45	F.66.08SW	7TAA292910R0029	148
CUSG-23B	7TAA292490R0001	31	E 154p11	7TCA292000R9094	78	F.66.10GR	7TAA292910R0030	148
CUSG-23S	7TAA292490R0002	31	E 154p13	7TCA292000R9095	44,45	F.66.10SW	7TAA292910R0031	148
CUSG-29B	7TAA292490R0003	31	E 154p16	7TCA292000R9096	78	F.66.12GR	7TAA292910R0032	148
CUSG-29S	-	31	E 154p18	7TCA292000R9097	44,45	F.66.12SW	7TAA292910R0033	148
CUSG-36B	7TAA292490R0004	31	E 154p20	7TCA292000R9098	44,45	F.66.16GR	7TAA292910R0034	148
CUSG-36S	-	31	E 155p16	7TCA292000R9107	44,62	F.66.16SW	7TAA292910R0035	148
CUSG-48B	7TAA292490R0005	31	E 155p18	7TCA292000R9101	44,62,64	F.66.20GR	7TAA292910R0036	148
CUSG-48S	-	31	E 155p20	7TCA292000R9138	44,62,64	F.66.20SW	7TAA292910R0037	148
CYLG-125B	7TAA292360R0000	17	E 155p25	7TCA292000R9108	44,45	F.66.25GR	7TAA292910R0038	148
CYLG-125S	7TAA292360R0001	17	E 155p28	7TCA292000R9109	44,45	F.66.25SW	7TAA292910R0039	148
CYLG-23B	7TAA292240R0008	17	E 156p25HF	7TCA292000R9104	44,62	F.66.30GR	7TAA292910R0040	148
CYLG-23S	7TAA292240R0009	17	E 156p32	7TCA292000R9110	44,45	F.66.30SW	7TAA292910R0041	148
CYLG-29B	7TAA292240R0010	17	E 156p34	7TCA292000R9121	78	F.66.40GR	7TAA292910R0042	148
CYLG-29S	7TAA292240R0011	17	E 156p36	7TCA292000R9111	44,45	F.66.40SW	7TAA292910R0043	148
CYLG-36B	7TAA292240R0012	17	E 157p36HF	7TCA292000R9112	44,45	F.66.50GR	7TAA292910R0044	148
CYLG-36S	7TAA292240R0013	17	E 157p40HF	7TCA292000R9113	44,45	F.66.50SW	7TAA292910R0045	148
CYLG-48B	7TAA292240R0014	17	E 158p44	7TCA292000R9114	44,45	F.66.70GR	7TAA292910R0046	148
CYLG-48S	7TAA292240R0015	17	E 158pm1X35	7TCA292000R9127	44,45	F.66.70SW	7TAA292910R0047	148
CYLG-56B	7TAA292360R0002	17	EK 150p7	7TCA292000R9053	44,62,64	FP-38	7TAA292880R0002	121
CYLG-56S	7TAA292360R0003	17	EK 150p8	7TCA292000R9068	44,62	FP-52	7TAA292880R0003	121
CYLG-70B	7TAA292360R0004	17	EK 150p9	7TCA292000R9069	44,62	G.PX.05SW	7TAA292910R0075	150
CYLG-70S	7TAA292360R0006	17	EK 154p13	7TCA292000R9088	44,62	G.PX.08SW	7TAA292910R0078	150
CYLG-95B	7TAA292360R0008	17	EK 154p16	7TCA292000R9123	44,62	G.PX.10SW	7TAA292910R0077	150
CYLG-95S	7TAA292360R0010	17	EK 155p18	7TCA292000R9100	44,45,62	G.PX.13SW	7TAA292910R0078	150
CYLT-07B	7TAA292240R0018	17	EK 155p20	7TCA292000R9102	44,45,62	G.PX.16SW	7TAA292910R0079	150
CYLT-07S	7TAA292240R0019	17	EK 155p25	7TCA292000R9103	44,62	G.PX.19SW	7TAA292910R0080	150
CYLT-10B	7TAA292240R0020	17	EK 156p28	7TCA292000R9105	44,62	G.PX.25SW	7TAA292910R0081	150
CYLT-10S	7TAA292240R0021	17	ESDG-56B	7TCA292000R7720	17	G.PX.29SW	7TAA292910R0082	150
CYLT-12B	7TAA292240R0022	17	ESDG-70B	7TCA292000R7722	17	G.PX.32SW	7TAA292910R0083	150
CYLT-12S	7TAA292240R0023	17	ESDG-95B	7TCA292000R1850	17	G.PX.38SW	7TAA292910R0084	150
CYLT-17B	7TAA292240R0024	17	ESDT-07B	7TAA292240R0049	17	G.PX.50SW	7TAA292910R0085	150

Index

Products in alphabetical order

Part. no.	GID no.	Page	Part. no.	GID no.	Page	Part. no.	GID no.	Page
GMM-07	7TAA292670R0028	111	JKNH-M257	7TCA292000R9357	49	LLPA-23A	7TAA292030R0009	34
GMM-09	7TAA292670R0029	111	JKNH-M323	7TCA292000R9358	49	LLPA-23S	7TAA292030R0010	34
GMM-11	7TAA292670R0030	111	JKNH-M329	7TCA292000R9308	49	LLPA-29A	7TAA292030R0011	34
GMM-13	7TAA292670R0032	111	JKNH-M406	7TCA292000R9309	49	LLPA-29S	7TAA292030R0012	34
GMM-16	7TAA292670R0034	111	JKNH-M409	7TCA292000R9359	49	LLPA-36A	7TAA292030R0013	34
GMM-21	7TAA292670R0035	111	JKNH-M506	7TCA292000R9360	49	LLPA-36S	7TAA292030R0014	34
GMM-29	7TAA292670R0037	111	JKNH-M508	7TCA292000R9310	49	LLPA-48A	7TAA292030R0015	34
GMM-36	7TAA292670R0038	111	JKNH-M638	7TCA292000R9361	49	LLPA-48S	7TAA292030R0016	34
GMM-42	7TAA292670R0039	111	JLLPA-12A	7TCA292000R9663	30	LLPAG-125A	7TAA292030R0017	34,126
GMM-48	7TAA292670R0040	111	JLLPAG-17A	7TCA292000R9664	30	LLPAG-125S	7TAA292030R0018	34,126
GMM-M12	7TAA292670R0041	111	JLLPAG-23A	7TCA292000R9665	30	LLPAG-17A	7TAA292030R0019	34
GMM-M16	7TAA292670R0043	111	JLLPAG-29A	7TCA292000R9666	30	LLPAG-17S	7TAA292030R0020	34
GMM-M20	7TAA292670R0045	111	JLLPAG-36A	7TCA292000R9667	30	LLPAG-23A	7TAA292030R0021	34
GMM-M25	7TAA292670R0047	111	JLLPAG-48A	7TCA292000R9668	30	LLPAG-23S	7TAA292030R0022	34
GMM-M32	7TAA292670R0049	111	JXPCSGF-17BO	7TCA292000R9616	29	LLPAG-29A	7TAA292030R0023	34
GMM-M40	7TAA292670R0051	111	JXPCSGF-23BO	7TCA292000R9610	29	LLPAG-29S	7TAA292030R0024	34
GMM-M50	7TAA292670R0052	111	JXPCSGF-29BO	7TCA292000R9617	29	LLPAG-36A	7TAA292030R0025	34
GMM-M63	7TAA292670R0053	111	JXPCSGF-36BO	7TCA292000R9618	29	LLPAG-36S	7TAA292030R0026	34
GMN-07	7TAA292670R0054	110	JXPCSGF-48BO	7TCA292000R9619	29	LLPAG-48A	7TAA292030R0027	34
GMN-09	7TAA292670R0055	110	JXPCSFT-12BO	7TCA292000R9615	29	LLPAG-48S	7TAA292030R0028	34
GMN-11	7TAA292670R0056	110	KNH2-NW10	7TAA292560R0000	106	LLPAG-56A	7TAA292030R0029	34,126
GMN-13	7TAA292670R0057	110	KNH2-NW12	7TAA292560R0001	106	LLPAG-56S	7TAA292030R0030	34,126
GMN-16	7TAA292670R0058	110	KNH2-NW17	7TAA292560R0002	106	LLPAG-70A	7TAA292030R0031	34,126
GMN-21	7TAA292670R0059	110	KNH2-NW23	7TAA292560R0003	106	LLPAG-70S	7TAA292030R0032	34,126
GMN-29	7TAA292670R0060	110	KNH2-NW29	7TAA292560R0004	106	LLPAG-95A	7TAA292030R0033	34,126
GMN-36	7TAA292670R0061	110	KNH2-NW36	7TAA292560R0005	106	LLPAG-95S	7TAA292030R0034	34,126
GMN-48	7TAA292670R0062	110	KNH2-NW48	7TAA292560R0006	106	LLPF-07A	7TAA292030R0035	35
GMN-M12	7TAA292670R0063	110	L.66.04GR	7TAA292910R0175	149	LLPF-07S	7TAA292030R0036	35
GMN-M16	7TAA292670R0064	110	L.66.04SW	7TAA292910R0178	149	LLPF-10A	7TAA292030R0037	35
GMN-M20	7TAA292670R0065	110	L.66.08GR	7TAA292910R0177	149	LLPF-10S	7TAA292030R0038	35
GMN-M25	7TAA292670R0066	110	L.66.08SW	7TAA292910R0178	149	LLPF-12A	7TAA292030R0039	35
GMN-M32	7TAA292670R0067	110	L.66.10GR	7TAA292910R0179	149	LLPF-12S	7TAA292030R0040	35
GMN-M40	7TAA292670R0068	110	L.66.10SW	7TAA292910R0180	149	LLPF-17A	7TAA292030R0041	35
GMN-M50	7TAA292670R0069	110	L.66.16GR	7TAA292910R0181	149	LLPF-17S	7TAA292030R0042	35
GMN-M63	7TAA292670R0070	110	L.66.16SW	7TAA292910R0182	149	LLPF-23A	7TAA292030R0043	35
HSG-00	7TAA292880R0004	153	L.66.20GR	7TAA292910R0183	149	LLPF-23S	7TAA292030R0044	35
HSG-00-SB	7TAA292880R0005	1539	L.66.20SW	7TAA292910R0184	149	LLPF-29A	7TAA292030R0045	35
JENQ-M162-10	7TCA292000R0463	101	L.66.25GR	7TAA292910R0185	149	LLPF-29S	7TAA292030R0046	35
JENQ-M207-10	7TCA292000R0464	101	L.66.25SW	7TAA292910R0186	149	LLPFG-17A	7TAA292030R0048	35
JENQ-M253-11	7TCA292000R0465	101	L.66.30GR	7TAA292910R0187	149	LLPFG-17S	7TAA292030R0049	35
JENQ-M329-13	7TCA292000R0466	101	L.66.30SW	7TAA292910R0188	149	LLPFG-23A	7TAA292030R0050	35
JENQ-M406-13	7TCA292000R0467	101	L.66.40GR	7TAA292910R0189	149	LLPFG-23S	7TAA292030R0051	35
JENQ-M506-14	7TCA292000R0468	101	L.66.40SW	7TAA292910R0190	149	LLPFG-29A	7TAA292030R0052	35
JFBDG-17C01	7TCA292000R7548	29	L.66.50GR	7TAA292910R0191	149	LLPFG-29S	7TAA292030R0053	35
JFBDG-23C01	7TCA292000R7549	29	L.66.50SW	7TAA292910R0192	149	LLPFG-36A	7TAA292030R0054	35
JFBDG-29C01	7TCA292000R7933	29	LLPA-07A	7TAA292030R0000	34	LLPFG-36S	7TAA292030R0055	35
JFBDG-36C01	7TCA292000R7932	29	LLPA-07S	7TAA292030R0001	34	LLPFG-48A	7TAA292030R0056	35
JFBDG-48C01	7TCA292000R7934	29	LLPA-10A	7TAA292030R0002	34	LLPFG-48S	7TAA292030R0057	35
JFBDT-12C01	7TCA292000R7547	29	LLPA-10S	7TAA292030R0003	34	M12M16M	7TAA292550R0044	107
JKNH-M162	7TCA292000R9305	49	LLPA-12A	7TAA292030R0005	34	M16M12M	7TAA292550R0045	107
JKNH-M202	7TCA292000R9352	49	LLPA-12S	7TAA292030R0006	34	M16M12M/6	7TAA292550R0046	107
JKNH-M207	7TCA292000R9306	49	LLPA-17A	7TAA292030R0007	34	M16M20M	7TAA292550R0047	107
JKNH-M253	7TCA292000R9307	49	LLPA-17S	7TAA292030R0008	34	M20M12M	7TAA292550R0048	107

Index

Products in alphabetical order

Part. no.	GID no.	Page	Part. no.	GID no.	Page	Part. no.	GID no.	Page
M20M12M/6	7TAA292550R0049	107	MKAH-M638-14	7TAA292400R0075	46	MVAV-M508-14	7TAA292150R0483	65
M20M16M	7TAA292550R0050	107	MKBH-M120-10	7TAA292400R0078	46	MVAV-M508-9	7TAA292150R0484	65
M20M16M/6	7TAA292550R0051	107	MKBH-M160-10	7TAA292400R0077	46	MVAV-M638-10	7TAA292150R0485	65
M20M25M	7TAA292550R0052	107	MKBH-M162-10	7TAA292400R0078	46	MVAV-M638-14	7TAA292150R0486	65
M25M16M	7TAA292550R0053	107	MKBH-M202-10	7TAA292400R0079	46	MVAV-P090	7TAA292150R0487	77
M25M16M/6	7TAA292550R0054	107	MKBH-M207-10	7TAA292400R0080	46	MVAV-P112	7TAA292150R0488	77
M25M20M	7TAA292550R0055	107	MKBH-M253-11	7TAA292400R0081	46	MVAV-P137	7TAA292150R0489	77
M25M20M/6	7TAA292550R0056	107	MKBH-M257-11	7TAA292400R0082	46	MVAV-P167	7TAA292150R0490	77
M25M32M	7TAA292550R0057	107	MKBH-M323-13	7TAA292400R0083	46	MVAV-P213	7TAA292150R0491	77
M32M20M	7TAA292550R0058	107	MKBH-M329-13	7TAA292400R0084	46	MVAV-P299	7TAA292150R0492	77
M32M20M/6	7TAA292550R0059	107	MKBH-M406-13	7TAA292400R0085	46	MVAV-P366	7TAA292150R0493	77
M32M25M	7TAA292550R0060	107	MKBH-M409-13	7TAA292400R0086	46	MVAV-P488	7TAA292150R0494	77
M32M25M/6	7TAA292550R0061	107	MKBH-M506-14	7TAA292400R0087	46	MVBV-M207-10	7TAA292150R0495	66
M32M40M	7TAA292550R0062	107	MKBH-M508-14	7TAA292400R0088	46	MVBV-M207-6	7TAA292150R0496	66
M40M25M	7TAA292550R0063	107	MKBH-M638-14	7TAA292400R0089	46	MVBV-M253-11	7TAA292150R0497	66
M40M25M/6	7TAA292550R0064	107	MKNH-M120-10	7TAA292400R0090	43	MVBV-M253-7	7TAA292150R0498	66
M40M32M	7TAA292550R0065	107	MKNH-M160-10	7TAA292400R0091	43	MVBV-M257-11	7TAA292150R0499	66
M40M32M/6	7TAA292550R0066	107	MKNH-M162-10	7TAA292400R0092	43	MVBV-M257-7	7TAA292150R0500	66
M40M50M	7TAA292550R0067	107	MKNH-M202-10	7TAA292400R0093	43	MVBV-M323-13	7TAA292150R0501	66
M50M32M	7TAA292550R0069	107	MKNH-M207-10	7TAA292400R0094	43	MVBV-M323-8	7TAA292150R0502	66
M50M32M/6	7TAA292550R0070	107	MKNH-M253-11	7TAA292400R0095	43	MVBV-M329-13	7TAA292150R0503	66
M50M40M	7TAA292550R0071	107	MKNH-M257-11	7TAA292400R0096	43	MVBV-M329-8	7TAA292150R0504	66
M50M40M/6	7TAA292550R0072	107	MKNH-M323-13	7TAA292400R0097	43	MVBV-M406-13	7TAA292150R0505	66
M50M63M	7TAA292550R0073	107	MKNH-M329-13	7TAA292400R0098	43	MVBV-M406-8	7TAA292150R0506	66
M63M40M	7TCA292000R2520	107	MKNH-M406-13	7TAA292400R0099	43	MVBV-M409-13	7TAA292150R0507	66
M63M40M/6	7TCA292000R0162	107	MKNH-M409-13	7TAA292400R0100	43	MVBV-M409-8	7TAA292150R0508	66
M63M50M	7TAA292550R0074	107	MKNH-M506-14	7TAA292400R0101	43	MVBV-M506-14	7TAA292150R0509	66
M63M50M/6	7TAA292550R0075	107	MKNH-M508-14	7TAA292400R0102	43	MVBV-M506-9	7TAA292150R0510	66
MAVIK-M20/01	7TAA292660R0006	122	MKNH-M638-14	7TAA292400R0103	43	MVBV-M508-14	7TAA292150R0511	66
MAVIK-M25/01	7TAA292660R0007	122	MONK-M162	7TCA292000R4711	100	MVBV-M508-9	7TAA292150R0512	66
MAVIK-M32/01	7TAA292660R0008	122	MONK-M207	7TCA292000R4712	100	MVBV-M638-10	7TAA292150R0513	66
MAVIK-M40/01	7TAA292660R0009	122	MONK-M253	7TCA292000R4713	100	MVBV-M638-14	7TAA292150R0514	66
MAVIK-M50/01	7TAA292660R0010	122	MONK-M329	7TCA292000R4714	100	MVBV-P167	7TAA292150R0515	77
MAVIK-M63/01	7TAA292660R0011	122	MONK-M406	7TCA292000R4715	100	MVBV-P213	7TAA292150R0516	77
MAVI-M20/01	7TAA292660R0000	122	MONK-M508	7TCA292000R4716	100	MVBV-P299	7TAA292150R0517	77
MAVI-M25/01	7TAA292660R0001	122	MPNK-M160	7TCA292000R4717	100	MVBV-P366	7TAA292150R0518	77
MAVI-M32/01	7TAA292660R0002	122	MPNK-M162	7TCA292000R4718	100	MVBV-P488	7TAA292150R0519	77
MAVI-M40/01	7TAA292660R0003	122	MPNK-M207	7TCA292000R4719	100	MVEMD-M406/01	7TCA292000R2747	154
MAVI-M50/01	7TAA292660R0004	122	MPNK-M253	7TCA292000R4720	100	MVEMD-M508/01	7TCA292000R2748	154
MAVI-M63/01	7TAA292660R0005	122	MPNK-M329	7TCA292000R4721	100	MVEMD-M6356/01	7TCA292000R2749	154
MKAH-M120-10	7TAA292400R0062	46	MREIR-U3529	7TCA292000R2699	152	MVEMD-P4856/01	7TCA292000R2750	154
MKAH-M160-10	7TAA292400R0063	46	MVAV-M120-10	7TAA292150R0471	65	MVEMD-RER6	7TCA292000R2751	155
MKAH-M162-10	7TAA292400R0064	46	MVAV-M120-5	7TAA292150R0472	65	MVEMD-RER6/01	7TCA292000R2752	155
MKAH-M202-10	7TAA292400R0065	46	MVAV-M162-10	7TAA292150R0473	65	MVEMD-RER8	7TCA292000R2753	155
MKAH-M207-10	7TAA292400R0066	46	MVAV-M162-5	7TAA292150R0474	65	MVNV-M120-10	7TAA292150R0520	60
MKAH-M253-11	7TAA292400R0067	46	MVAV-M207-10	7TAA292150R0475	65	MVNV-M120-5	7TAA292150R0521	60
MKAH-M257-11	7TAA292400R0068	46	MVAV-M207-6	7TAA292150R0478	65	MVNV-M160-10	7TAA292150R0522	60
MKAH-M323-13	7TAA292400R0069	46	MVAV-M253-11	7TAA292150R0477	65	MVNV-M160-5	7TAA292150R0523	60
MKAH-M329-13	7TAA292400R0070	46	MVAV-M253-7	7TAA292150R0478	65	MVNV-M162-10	7TAA292150R0524	60
MKAH-M406-13	7TAA292400R0071	46	MVAV-M329-13	7TAA292150R0479	65	MVNV-M162-5	7TAA292150R0525	60
MKAH-M409-13	7TAA292400R0072	46	MVAV-M329-8	7TAA292150R0480	65	MVNV-M202-10	7TAA292150R0526	60
MKAH-M506-14	7TAA292400R0073	46	MVAV-M406-13	7TAA292150R0481	65	MVNV-M202-6	7TAA292150R0527	60
MKAH-M508-14	7TAA292400R0074	46	MVAV-M406-8	7TAA292150R0482	65	MVNV-M207-10	7TAA292150R0528	60

Index

Products in alphabetical order

Part. no.	GID no.	Page
MVNV-M207-6	7TAA292150R0529	60
MVNV-M253-11	7TAA292150R0530	60
MVNV-M253-7	7TAA292150R0531	60
MVNV-M257-11	7TAA292150R0532	60
MVNV-M257-7	7TAA292150R0533	60
MVNV-M323-13	7TAA292150R0534	60
MVNV-M323-8	7TAA292150R0535	60
MVNV-M329-13	7TAA292150R0536	60
MVNV-M329-8	7TAA292150R0537	60
MVNV-M406-13	7TAA292150R0538	60
MVNV-M406-8	7TAA292150R0539	60
MVNV-M409-13	7TAA292150R0540	60
MVNV-M409-8	7TAA292150R0541	60
MVNV-M506-14	7TAA292150R0542	60
MVNV-M506-9	7TAA292150R0543	60
MVNV-M508-14	7TAA292150R0544	60
MVNV-M508-9	7TAA292150R0545	60
MVNV-M638-10	7TAA292150R0546	60
MVNV-M638-14	7TAA292150R0547	60
MVNV-P090	7TAA292150R0548	75
MVNV-P112	7TAA292150R0549	75
MVNV-P137	7TAA292150R0550	75
MVNV-P167	7TAA292150R0551	75
MVNV-P213	7TAA292150R0552	75
MVNV-P293	7TAA292150R0553	75
MVNV-P299	7TAA292150R0554	75
MVNV-P366	7TAA292150R0555	75
MVNV-P488	7TAA292150R0556	75
MVWV-M120-10	7TAA292150R0557	69
MVWV-M120-5	7TAA292150R0558	69
MVWV-M160-10	7TAA292150R0559	69
MVWV-M160-5	7TAA292150R0560	69
MVWV-M162-10	7TAA292150R0561	69
MVWV-M162-5	7TAA292150R0562	69
MVWV-M202-10	7TAA292150R0563	69
MVWV-M202-6	7TAA292150R0564	69
MVWV-M207-10	7TAA292150R0565	69
MVWV-M207-6	7TAA292150R0566	69
MVWV-M253-11	7TAA292150R0567	69
MVWV-M253-7	7TAA292150R0568	69
MVWV-M329-13	7TAA292150R0569	69
MVWV-M329-8	7TAA292150R0570	69
MVWV-M406-13	7TAA292150R0571	69
MVWV-M406-8	7TAA292150R0572	69
MVWV-M508-14	7TAA292150R0573	69
MVWV-M508-9	7TAA292150R0574	69
MVWV-M638-10	7TAA292150R0575	69
MVWV-M638-14	7TAA292150R0578	69
MVWV-P090	7TAA292150R0577	78
MVWV-P112	7TAA292150R0578	78
MVWV-P137	7TAA292150R0579	78
MVWV-P167	7TAA292150R0580	78
MVWV-P213	7TAA292150R0581	78

Part. no.	GID no.	Page
MVWV-P299	7TAA292150R0582	78
MVWV-P366	7TAA292150R0583	78
MVWV-P488	7TAA292150R0584	78
NFN3-07	7TAA292800R0000	106
NFN3-09	7TAA292800R0001	106
NFN3-11	7TAA292800R0002	106
NFN3-16	7TAA292800R0003	106
NFN3-21	7TAA292800R0004	106
NFN3-29	7TAA292800R0005	106
NFN3-36	7TAA292800R0006	106
NFN3-48	7TAA292800R0007	106
NKAH-M120-10	7TAA292400R0104	46
NKAH-M160-10	7TAA292400R0105	46
NKAH-M162-10	7TAA292400R0106	46
NKAH-M202-10	7TAA292400R0107	46
NKAH-M207-10	7TAA292400R0108	46
NKAH-M253-11	7TAA292400R0109	46
NKAH-M257-11	7TAA292400R0110	46
NKAH-M323-13	7TAA292400R0111	46
NKAH-M329-13	7TAA292400R0112	46
NKAH-M406-13	7TAA292400R0113	46
NKAH-M409-13	7TAA292400R0114	46
NKAH-M506-14	7TAA292400R0115	46
NKAH-M508-14	7TAA292400R0116	46
NKAH-M638-14	7TAA292400R0117	46
NKBH-M120-10	7TAA292400R0118	46
NKBH-M160-10	7TAA292400R0119	46
NKBH-M162-10	7TAA292400R0120	46
NKBH-M202-10	7TAA292400R0121	46
NKBH-M207-10	7TAA292400R0122	46
NKBH-M253-11	7TAA292400R0123	46
NKBH-M257-11	7TAA292400R0124	46
NKBH-M323-13	7TAA292400R0125	46
NKBH-M329-13	7TAA292400R0126	46
NKBH-M406-13	7TAA292400R0127	46
NKBH-M409-13	7TAA292400R0128	46
NKBH-M506-14	7TAA292400R0129	46
NKBH-M508-14	7TAA292400R0130	46
NKBH-M638-14	7TAA292400R0131	46
NKIS-M162	7TAA292400R0132	48
NKIS-M207	7TAA292400R0133	48
NKIS-M253	7TAA292400R0134	48
NKIS-M329	7TAA292400R0135	48
NKIS-M406	7TAA292400R0136	48
NKIS-M508	7TAA292400R0137	48
NKIS-M638	7TAA292400R0138	48
NKNH-M120-10	7TAA292400R0139	43
NKNH-M160-10	7TAA292400R0140	43
NKNH-M162-10	7TAA292400R0141	43
NKNH-M202-10	7TAA292400R0142	43
NKNH-M207-10	7TAA292400R0143	43
NKNH-M253-11	7TAA292400R0144	43
NKNH-M257-11	7TAA292400R0145	43

Part. no.	GID no.	Page
NKNH-M323-13	7TAA292400R0150	43
NKNH-M329-13	7TAA292400R0147	43
NKNH-M406-13	7TAA292400R0148	43
NKNH-M409-13	7TAA292400R0149	43
NKNH-M506-14	7TAA292400R0150	43
NKNH-M508-14	7TAA292400R0151	43
NKNH-M638-14	7TAA292400R0152	43
NKNZ-M120/P1	7TAA292400R0153	44
NKNZ-M120/P2	7TAA292400R0154	44
NKNZ-M120/P3	7TAA292400R0155	44
NKNZ-M120R/P	-	44
NKNZ-M160/P1	7TAA292400R0156	44
NKNZ-M160/P1-L	7TCA292000R7735	45
NKNZ-M160/P2	7TAA292400R0157	44
NKNZ-M160/P2-L	-	45
NKNZ-M160/P3	7TAA292400R0158	44
NKNZ-M160/P3-L	7TCA292000R5581	45
NKNZ-M160R/P	7TCA292000R0183	44
NKNZ-M160R/P-L	-	45
NKNZ-M202/P1	7TAA292400R0161	44
NKNZ-M202/P1-L	7TCA292000R0184	45
NKNZ-M202/P3	7TAA292400R0162	44
NKNZ-M202/P3-L	7TCA292000R7948	45
NKNZ-M202/P4	7TAA292400R0163	44
NKNZ-M202/P4-L	7TCA292000R8006	45
NKNZ-M202R/P	7TCA292000R0185	44
NKNZ-M202R/P-L	7TCA292000R7752	45
NKNZ-M207/P3	7TAA292400R0165	44
NKNZ-M207/P3-L	7TCA292000R0186	45
NKNZ-M207/P4	7TAA292400R0166	44
NKNZ-M207/P4-L	-	45
NKNZ-M207/P5	7TAA292400R0167	44
NKNZ-M207/P5-L	7TCA292000R8008	45
NKNZ-M207R/P	7TCA292000R6163	44
NKNZ-M207R/P-L	7TCA292000R0187	45
NKNZ-M253/P5	7TCA292000R0188	44
NKNZ-M253/P6	7TCA292000R0189	44
NKNZ-M253R/P	7TCA292000R6152	44
NKNZ-M253R1/P	7TCA292000R6288	44
NKNZ-M257/P4	7TCA292000R8813	44
NKNZ-M257/P5	7TAA292400R0172	44
NKNZ-M257/P5-L	7TAA292400R0173	45
NKNZ-M257/P6	7TAA292400R0174	44
NKNZ-M257/P6-L	7TCA292000R0190	45
NKNZ-M257R/P	7TCA292000R0191	44
NKNZ-M257R/P-L	7TCA292000R6630	45
NKNZ-M323/P2	7TCA292000R0192	44
NKNZ-M323/P2-L	7TCA292000R0193	45
NKNZ-M323/P4	7TAA292400R0177	44
NKNZ-M323/P4-L	7TCA292000R0194	45
NKNZ-M323/P5	7TAA292400R0178	44
NKNZ-M323/P5-L	7TCA292000R9595	45
NKNZ-M323R/P	7TAA292400R0179	44

Index

Products in alphabetical order

Part. no.	GID no.	Page	Part. no.	GID no.	Page	Part. no.	GID no.	Page
NKNZ-M323R/P-L	7TCA292000R8774	45	NSBV-M638-14	7TAA292150R0590	82	NVAV-M638-10	7TAA292150R0614	65
NKNZ-M323R1/P	7TAA292400R0180	44	NSBV-N027/01	7TCA292000R8940	82	NVAV-M638-14	7TAA292150R0615	65
NKNZ-M323R1/P-L	7TCA292000R6197	45	NSBV-N043/01	7TCA292000R8941	82	NVAV-P090	7TAA292150R0616	77
NKNZ-M329/P2	7TCA292000R0195	44	NSBV-N069/01	7TCA292000R8942	82	NVAV-P112	7TAA292150R0617	77
NKNZ-M329/P2-L	7TCA292000R9446	45	NSBV-N078/01	7TCA292000R8943	82	NVAV-P137	7TAA292150R0618	77
NKNZ-M329/P3	7TCA292000R6029	44	NSBV-N088/01	7TCA292000R8944	82	NVAV-P167	7TAA292150R0619	77
NKNZ-M329/P3-L	7TCA292000R9017	45	NSBV-N098/01	7TCA292000R8945	82	NVAV-P213	7TAA292150R0620	77
NKNZ-M329/P4	7TCA292000R0196	44	NSBV-P167-6.5	7TAA292150R0591	82	NVAV-P299	7TAA292150R0621	77
NKNZ-M329R/P	7TCA292000R6284	44	NSBV-P213-7	7TAA292150R0592	82	NVAV-P366	7TAA292150R0622	77
NKNZ-M329R/P-L	-	45	NSBV-P299-8	7TAA292150R0593	82	NVAV-P488	7TAA292150R0623	77
NKNZ-M406/P1	7TCA292000R5867	44	NSBV-P366-9	7TAA292150R0594	82	NVBV-M207-10	7TAA292150R0624	66
NKNZ-M406/P2	7TCA292000R0197	44	NSBV-P488-10	7TAA292150R0595	82	NVBV-M207-6	7TAA292150R0625	66
NKNZ-M406R/P	7TCA292000R6071	44	NSNIV-N022/01	7TCA292000R9059	84	NVBV-M253-11	7TAA292150R0626	66
NKNZ-M409/P1	7TCA292000R9509	44	NSNIV-N027/01	7TCA292000R8946	84	NVBV-M253-7	7TAA292150R0627	66
NKNZ-M409/P2	7TCA292000R9235	44	NSNIV-N043/01	7TCA292000R9060	84	NVBV-M257-11	7TAA292150R0628	66
NKNZ-M409/P3	7TCA292000R6028	44	NSNIV-N069/01	7TCA292000R8936	84	NVBV-M257-7	7TAA292150R0629	66
NKNZ-M409/P3-L	-	45	NSNIV-N078/01	7TCA292000R9061	84	NVBV-M323-13	7TAA292150R0630	66
NKNZ-M409/P4	7TAA292400R0187	44	NSNIV-N088/01	7TCA292000R9062	84	NVBV-M323-8	7TAA292150R0631	66
NKNZ-M409/P4-L	7TCA292000R0198	45	NSNIV-N098/01	7TCA292000R9063	84	NVBV-M329-13	7TAA292150R0632	66
NKNZ-M409/P5	7TAA292400R0188	44	NSNV-M120-10	7TCA292000R5954	83	NVBV-M329-8	7TAA292150R0633	66
NKNZ-M409/P5-L	7TCA292000R8009	45	NSNV-M162-10	7TCA292000R5955	83	NVBV-M406-13	7TAA292150R0634	66
NKNZ-M409R/P	7TAA292400R0189	44	NSNV-M207-10	7TCA292000R5956	83	NVBV-M406-8	7TAA292150R0635	66
NKNZ-M409R/P-L	7TCA292000R0199	45	NSNV-M253-11	7TCA292000R5957	83	NVBV-M409-13	7TAA292150R0636	66
NKNZ-M506/P1	7TAA292400R0192	44	NSNV-M329-13	7TCA292000R5958	83	NVBV-M409-8	7TAA292150R0637	66
NKNZ-M506/P1-L	-	45	NSNV-M329-7	7TCA292000R5959	83	NVBV-M506-14	7TAA292150R0638	66
NKNZ-M506/P3	7TAA292400R0193	44	NSNV-M406-13	7TCA292000R5960	83	NVBV-M506-9	7TAA292150R0639	66
NKNZ-M506/P3-L	7TCA292000R8548	45	NSNV-M406-7	7TCA292000R5961	83	NVBV-M508-14	7TAA292150R0640	66
NKNZ-M506R/P	7TCA292000R0200	44	NSNV-M409-13	7TCA292000R5962	83	NVBV-M508-9	7TAA292150R0641	66
NKNZ-M506R/P-L	7TCA292000R0201	45	NSNV-M508-14	7TCA292000R5963	83	NVBV-M638-10	7TAA292150R0642	66
NKNZ-M508/P2	7TAA292400R0196	44	NSNV-M638-14	7TCA292000R5964	83	NVBV-M638-14	7TAA292150R0643	66
NKNZ-M508/P2-L	7TCA292000R8788	45	NSNV-N022/01	7TCA292000R8904	83	NVBV-P167	7TAA292150R0644	77
NKNZ-M508/P3	7TAA292400R0197	44	NSNV-N027/01	7TCA292000R8905	83	NVBV-P213	7TAA292150R0645	77
NKNZ-M508/P3-L	7TCA292000R9600	45	NSNV-N043/01	7TCA292000R8906	83	NVBV-P299	7TAA292150R0646	77
NKNZ-M508R/P	7TCA292000R0202	44	NSNV-N069/01	7TCA292000R8907	83	NVBV-P366	7TAA292150R0647	77
NKNZ-M508R/P-L	-	45	NSNV-N078/01	7TCA292000R8908	83	NVBV-P488	7TAA292150R0648	77
NKNZ-M638/P1	7TAA292400R0200	44	NSNV-N088/01	7TCA292000R8909	83	NVIR-M120	7TAA292610R0133	86
NKNZ-M638/P1-L	-	45	NSNV-N098/01	7TCA292000R8910	83	NVIR-M160	7TCA292000R0215	86
NKNZ-M638/P2	7TAA292400R0201	44	NSWIV-N022/01	7TCA292000R0470	84	NVIR-M162	7TAA292610R0134	86
NKNZ-M638/P2-L	7TCA292000R8547	45	NSWV-N022/01	7TCA292000R8939	82	NVIR-M207	7TAA292610R0135	86
NKNZ-M638R/P	7TCA292000R9837	44	NVAV-M120-10	7TAA292150R0596	65	NVIR-M253	7TAA292610R0136	86
NKNZ-M638R/P-L	7TCA292000R9838	45	NVAV-M120-5	7TAA292150R0597	65	NVIR-M329	7TAA292610R0137	86
NSBIV-N027/01	7TCA292000R8950	84	NVAV-M162-10	7TAA292150R0598	65	NVIR-M406	7TAA292610R0138	86
NSBIV-N043/01	7TCA292000R0471	84	NVAV-M162-5	7TAA292150R0599	65	NVIR-M508	7TAA292610R0139	86
NSBIV-N069/01	7TCA292000R8951	84	NVAV-M207-10	7TAA292150R0600	65	NVIR-M638	7TAA292610R0140	86
NSBIV-N078/01	7TCA292000R0472	84	NVAV-M207-6	7TAA292150R0601	65	NVIZR-P07M	7TAA292610R0141	87
NSBIV-N088/01	7TCA292000R0474	84	NVAV-M253-11	7TAA292150R0602	65	NVIZR-P090	7TAA292610R0142	87
NSBIV-N098/01	7TCA292000R0475	84	NVAV-M253-7	7TAA292150R0603	65	NVIZR-P110	7TAA292610R0143	87
NSBV-M207-10	7TAA292150R0585	82	NVAV-M329-13	7TAA292150R0606	65	NVIZR-P112	7TAA292610R0144	87
NSBV-M253-11	7TAA292150R0586	82	NVAV-M329-8	7TAA292150R0607	65	NVIZR-P137	7TCA292000R0216	87
NSBV-M329-13	7TAA292150R0587	82	NVAV-M406-13	7TAA292150R0608	65	NVIZR-P167	7TAA292610R0145	87
NSBV-M406-13	7TAA292150R0588	82	NVAV-M406-8	7TAA292150R0609	65	NVIZR-P213	7TAA292610R0150	87
NSBV-M409-13	7TCA292000R2945	82	NVAV-M508-14	7TAA292150R0612	65	NVIZR-P299	7TAA292610R0147	87
NSBV-M508-14	7TAA292150R0589	82	NVAV-M508-9	7TAA292150R0613	65	NVIZR-P366	7TAA292610R0148	87

Index

Products in alphabetical order

Part. no.	GID no.	Page	Part. no.	GID no.	Page	Part. no.	GID no.	Page
NVIZR-P488	7TAA292610R0149	87	NVNZ-M120R/P	7TAA292150R0686	62	NVNZ-M257S/B5	7TCA292000R9794	63
NVN3-07	7TAA292800R0008	106	NVNZ-M120R/P-L	-	64	NVNZ-M257S/B6	-	63
NVN3-09	7TAA292800R0009	106	NVNZ-M120S/B1	-	63	NVNZ-M257S/P4	7TAA292150R0734	62
NVN3-11	7TAA292800R0010	106	NVNZ-M120S/B2	-	63	NVNZ-M257S/P5	7TAA292150R0735	62
NVN3-16	7TAA292800R0011	106	NVNZ-M120S/B3	-	63	NVNZ-M257S/P5-L	7TAA292150R0736	64
NVN3-21	7TAA292800R0012	106	NVNZ-M120S/P1	7TAA292150R0689	62	NVNZ-M257S/P6	7TAA292150R0737	62
NVN3-29	7TAA292800R0013	106	NVNZ-M120S/P1-L	7TCA292000R0254	64	NVNZ-M257S/P6-L	7TAA292150R0738	64
NVN3-36	7TAA292800R0014	106	NVNZ-M120S/P2	7TAA292150R0690	62	NVNZ-M323R/P	7TAA292150R0739	62
NVN3-48	7TAA292800R0015	106	NVNZ-M120S/P3	7TAA292150R0691	62	NVNZ-M323R/P-L	7TAA292150R0740	64
NVNV-M120-10	7TAA292150R0649	60	NVNZ-M120S/P3-L	7TCA292000R0255	64	NVNZ-M323R1/P	7TAA292150R0741	62
NVNV-M120-5	7TAA292150R0650	60	NVNZ-M160R/P	7TAA292150R0692	62	NVNZ-M323R1/P-L	7TAA292150R0742	64
NVNV-M160-10	7TAA292150R0651	60	NVNZ-M160R/P-L	7TAA292150R0693	64	NVNZ-M323S/B4	7TCA292000R9137	63
NVNV-M160-5	7TAA292150R0652	60	NVNZ-M160S/B1	-	63	NVNZ-M323S/B5	7TCA292000R9795	63
NVNV-M162-10	7TAA292150R0653	60	NVNZ-M160S/B2	-	63	NVNZ-M323S/P4	7TAA292150R0745	62
NVNV-M162-5	7TAA292150R0654	60	NVNZ-M160S/B3	-	63	NVNZ-M323S/P4-L	7TAA292150R0746	64
NVNV-M202-10	7TAA292150R0655	60	NVNZ-M160S/P1	7TAA292150R0696	62	NVNZ-M323S/P5	7TAA292150R0747	62
NVNV-M202-6	7TAA292150R0656	60	NVNZ-M160S/P1-L	7TAA292150R0697	64	NVNZ-M323S/P5-L	7TAA292150R0748	64
NVNV-M207-10	7TAA292150R0657	60	NVNZ-M160S/P2	7TAA292150R0698	62	NVNZ-M329R/P	7TCA292000R0278	62
NVNV-M207-6	7TAA292150R0658	60	NVNZ-M160S/P2-L	7TAA292150R0699	64	NVNZ-M329R/P-L	7TAA292150R0749	64
NVNV-M253-11	7TAA292150R0659	60	NVNZ-M160S/P3	7TAA292150R0700	62	NVNZ-M329S/B2	-	63
NVNV-M253-7	7TAA292150R0660	60	NVNZ-M160S/P3-L	7TAA292150R0701	64	NVNZ-M329S/B3	-	63
NVNV-M257-11	7TAA292150R0661	60	NVNZ-M202R/P	7TAA292150R0704	62	NVNZ-M329S/B4	7TCA292000R9796	63
NVNV-M257-7	7TAA292150R0662	60	NVNZ-M202R/P-L	7TAA292150R0705	64	NVNZ-M329S/P2	7TAA292150R0752	62
NVNV-M323-13	7TAA292150R0663	60	NVNZ-M202S/B1	7TCA292000R9839	63	NVNZ-M329S/P2-L	7TAA292150R0753	64
NVNV-M323-8	7TAA292150R0664	60	NVNZ-M202S/B3	7TCA292000R9503	63	NVNZ-M329S/P3	7TAA292150R0754	62
NVNV-M329-13	7TAA292150R0665	60	NVNZ-M202S/B4	-	63	NVNZ-M329S/P3-L	7TAA292150R0755	64
NVNV-M329-8	7TAA292150R0666	60	NVNZ-M202S/P1	7TAA292150R0708	62	NVNZ-M329S/P4	7TAA292150R0756	62
NVNV-M406-13	7TAA292150R0667	60	NVNZ-M202S/P1-L	7TAA292150R0709	64	NVNZ-M406R/P	7TAA292150R0757	62
NVNV-M406-8	7TAA292150R0668	60	NVNZ-M202S/P3	7TAA292150R0710	62	NVNZ-M406S/B1	-	63
NVNV-M409-13	7TAA292150R0669	60	NVNZ-M202S/P3-L	7TAA292150R0711	64	NVNZ-M406S/B2	-	63
NVNV-M409-8	7TAA292150R0670	60	NVNZ-M202S/P4	7TAA292150R0712	62	NVNZ-M406S/P1	7TAA292150R0780	62
NVNV-M506-14	7TAA292150R0671	60	NVNZ-M202S/P4-L	7TAA292150R0713	64	NVNZ-M406S/P2	7TAA292150R0781	62
NVNV-M506-9	7TAA292150R0672	60	NVNZ-M207R/P	7TAA292150R0714	62	NVNZ-M409R/P	7TAA292150R0782	62
NVNV-M508-14	7TAA292150R0673	60	NVNZ-M207R/P-L	7TAA292150R0715	64	NVNZ-M409R/P-L	7TAA292150R0783	64
NVNV-M508-9	7TAA292150R0674	60	NVNZ-M207S/B1	7TCA292000R9315	63	NVNZ-M409S/B1	-	63
NVNV-M638-10	7TAA292150R0675	60	NVNZ-M207S/B2	7TCA292000R9316	63	NVNZ-M409S/B2	-	63
NVNV-M638-14	7TAA292150R0678	60	NVNZ-M207S/B3	7TCA292000R9317	63	NVNZ-M409S/B3	-	63
NVNV-N022	7TCA292000R8980	61	NVNZ-M207S/B4	7TCA292000R9318	63	NVNZ-M409S/B4	-	63
NVNV-N027	7TCA292000R8981	61	NVNZ-M207S/B5	7TCA292000R9319	63	NVNZ-M409S/B5	-	63
NVNV-N043	7TCA292000R8985	61	NVNZ-M207S/P3	7TAA292150R0718	62	NVNZ-M409S/P1	7TAA292150R0786	62
NVNV-N069	7TCA292000R8986	61	NVNZ-M207S/P3-L	7TAA292150R0719	64	NVNZ-M409S/P2	7TAA292150R0787	62
NVNV-N078	7TCA292000R8982	61	NVNZ-M207S/P4	7TAA292150R0720	62	NVNZ-M409S/P3	7TCA292000R0288	62
NVNV-N088	7TCA292000R8983	61	NVNZ-M207S/P4-L	7TAA292150R0721	64	NVNZ-M409S/P3-L	7TAA292150R0788	64
NVNV-N098	7TCA292000R8984	61	NVNZ-M207S/P5	7TAA292150R0722	62	NVNZ-M409S/P4	7TAA292150R0789	62
NVNV-P090	7TAA292150R0677	75	NVNZ-M207S/P5-L	7TAA292150R0723	64	NVNZ-M409S/P4-L	7TAA292150R0770	64
NVNV-P112	7TAA292150R0678	75	NVNZ-M253R/P	7TAA292150R0724	62	NVNZ-M409S/P5	7TAA292150R0771	62
NVNV-P137	7TAA292150R0679	75	NVNZ-M253S/B5	-	63	NVNZ-M409S/P5-L	7TAA292150R0772	64
NVNV-P167	7TAA292150R0680	75	NVNZ-M253S/B6	-	63	NVNZ-M506R/P	7TAA292150R0773	62
NVNV-P213	7TAA292150R0681	75	NVNZ-M253S/P5	7TAA292150R0728	62	NVNZ-M506R/P-L	7TAA292150R0774	64
NVNV-P293	7TAA292150R0682	75	NVNZ-M253S/P6	7TAA292150R0729	62	NVNZ-M506S/B1	-	63
NVNV-P299	7TAA292150R0683	75	NVNZ-M257R/P	7TAA292150R0730	62	NVNZ-M506S/B3	-	63
NVNV-P366	7TAA292150R0684	75	NVNZ-M257R/P-L	7TAA292150R0731	64	NVNZ-M506S/P1	7TAA292150R0777	62
NVNV-P488	7TAA292150R0685	75	NVNZ-M257S/B4	-	63	NVNZ-M506S/P1-L	7TAA292150R0778	64

Index

Products in alphabetical order

Part. no.	GID no.	Page	Part. no.	GID no.	Page	Part. no.	GID no.	Page
NVNZ-M506S/P3	7TAA292150R0779	62	NVWV-M160-10	7TAA292150R0866	69	PACOF-12B	7TAA292730R0002	32,134
NVNZ-M506S/P3-L	7TAA292150R0780	64	NVWV-M160-5	7TAA292150R0867	69	PACOF-17B	7TAA292730R0004	32,134
NVNZ-M508R/P	7TAA292150R0781	62	NVWV-M162-10	7TAA292150R0868	69	PACOF-23B	7TAA292730R0006	32,134
NVNZ-M508R/P-L	7TAA292150R0782	64	NVWV-M162-5	7TAA292150R0869	69	PACOF-29B	7TAA292730R0008	32,134
NVNZ-M508S/B2	-	63	NVWV-M202-10	7TAA292150R0870	69	PACOF-36B	7TAA292730R0009	32,134
NVNZ-M508S/B3	7TCA292000R9591	63	NVWV-M202-6	7TAA292150R0871	69	PACOF-48B	7TAA292730R0010	32,134
NVNZ-M508S/P2	7TAA292150R0785	62	NVWV-M207-10	7TAA292150R0872	69	PACOF-70B	7TAA292730R0011	32,134
NVNZ-M508S/P2-L	7TAA292150R0786	64	NVWV-M207-6	7TAA292150R0873	69	PCLG-125B	7TAA292360R0011	18,126
NVNZ-M508S/P3	7TAA292150R0787	62	NVWV-M253-11	7TAA292150R0874	69	PCLG-125S	7TAA292360R0012	18,126
NVNZ-M508S/P3-L	7TAA292150R0788	64	NVWV-M253-7	7TAA292150R0875	69	PCLG-17B	7TAA292240R0059	18
NVNZ-M638R/P	7TAA292150R0789	62	NVWV-M329-13	7TAA292150R0878	69	PCLG-17S	7TAA292240R0060	18
NVNZ-M638R/P-L	7TAA292150R0790	64	NVWV-M329-8	7TAA292150R0877	69	PCLG-23B	7TAA292240R0062	18
NVNZ-M638S/B1	-	63	NVWV-M406-13	7TAA292150R0878	69	PCLG-23S	7TAA292240R0063	18
NVNZ-M638S/B2	-	63	NVWV-M406-8	7TAA292150R0879	69	PCLG-29B	7TAA292240R0065	18
NVNZ-M638S/P1	7TAA292150R0793	62	NVWV-M508-14	7TAA292150R0880	69	PCLG-29S	7TAA292240R0066	18
NVNZ-M638S/P1-L	7TAA292150R0794	64	NVWV-M508-9	7TAA292150R0881	69	PCLG-36B	7TAA292240R0069	18
NVNZ-M638S/P2	7TAA292150R0795	62	NVWV-M638-10	7TAA292150R0882	69	PCLG-36S	7TAA292240R0071	18
NVNZ-M638S/P2-L	7TAA292150R0796	64	NVWV-M638-14	7TAA292150R0883	69	PCLG-48B	7TAA292240R0073	18
NVNZ-P090R/P	7TAA292150R0803	78	NVWV-P090	7TAA292150R0884	78	PCLG-48S	7TAA292240R0075	18
NVNZ-P090S/P1	7TCA292000R0296	78	NVWV-P112	7TAA292150R0885	78	PCLG-56B	7TAA292360R0013	18,126
NVNZ-P090S/P3	7TAA292150R0806	78	NVWV-P137	7TAA292150R0886	78	PCLG-56S	7TAA292360R0015	18,126
NVNZ-P110R/P	7TAA292150R0809	78	NVWV-P167	7TAA292150R0887	78	PCLG-70B	7TAA292360R0017	18,126
NVNZ-P110S/P1	7TAA292150R0812	78	NVWV-P213	7TAA292150R0888	78	PCLG-70S	7TAA292360R0019	18,126
NVNZ-P110S/P3	7TAA292150R0813	78	NVWV-P299	7TAA292150R0889	78	PCLG-95B	7TAA292360R0021	18,126
NVNZ-P112R/P	7TAA292150R0816	78	NVWV-P366	7TAA292150R0890	78	PCLG-95S	7TAA292360R0023	18,126
NVNZ-P112S/P1	7TAA292150R0819	78	NVWV-P488	7TAA292150R0891	78	PCLT-07B	7TAA292240R0078	18
NVNZ-P112S/P3	7TAA292150R0820	78	NVWZ-M160R/P	7TAA292150R0892	70	PCLT-07S	7TAA292240R0077	18
NVNZ-P112S/P4	7TAA292150R0821	78	NVWZ-M160S/P1	7TAA292150R0893	70	PCLT-10B	7TAA292240R0078	18
NVNZ-P160R/P	-	78	NVWZ-M160S/P2	7TAA292150R0894	70	PCLT-10S	7TAA292240R0079	18
NVNZ-P160S/P1	7TAA292150R0822	78	NVWZ-M160S/P3	7TAA292150R0895	70	PCLT-12B	7TAA292240R0080	18
NVNZ-P167R/P	7TAA292150R0825	78	NVWZ-M202R/P	7TAA292150R0896	70	PCLT-12S	7TAA292240R0081	18
NVNZ-P167S/P3	7TAA292150R0828	78	NVWZ-M202S/P1	7TAA292150R0897	70	PCLT-17B	7TAA292240R0083	18
NVNZ-P167S/P4	7TAA292150R0829	78	NVWZ-M202S/P3	7TAA292150R0898	70	PCLT-17S	7TAA292240R0085	18
NVNZ-P167S/P5	7TAA292150R0830	78	NVWZ-M202S/P4	7TAA292150R0899	70	PCLT-23B	7TAA292240R0086	18
NVNZ-P167S/P6	7TAA292150R0831	78	NVWZ-M207R/P	7TAA292150R0900	70	PCLT-23S	7TAA292240R0088	18
NVNZ-P213R/P	7TAA292150R0834	78	NVWZ-M207S/P1	7TCA292000R3285	70	PCLT-29B	7TAA292240R0089	18
NVNZ-P213R1/P	7TAA292150R0836	78	NVWZ-M207S/P3	7TAA292150R0901	70	PCLT-29S	7TAA292240R0091	18
NVNZ-P213S/P1	7TCA292000R0301	78	NVWZ-M207S/P4	7TAA292150R0902	70	PCLT-36B	7TAA292240R0092	18
NVNZ-P213S/P4	7TAA292150R0839	78	NVWZ-M207S/P5	7TAA292150R0903	70	PCLT-36S	7TCA292000R3533	18
NVNZ-P213S/P5	7TAA292150R0840	78	NVWZ-M257R/P	7TAA292150R0904	70	PCLT-48B	7TCA292000R3535	18
NVNZ-P299R/P	7TAA292150R0843	78	NVWZ-M257S/P5	7TAA292150R0905	70	PCLT-48S	7TCA292000R3536	18
NVNZ-P299S/P3	7TAA292150R0846	78	NVWZ-M257S/P6	7TAA292150R0906	70	PELT-10S	7TAA292240R0123	19
NVNZ-P299S/P4	7TAA292150R0847	78	NVWZ-M323S/P4	7TCA292000R3286	70	PELT-10SL	7TAA292240R0124	19
NVNZ-P299S/P5	7TAA292150R0848	78	OVN2-07	7TAA292700R0042	105	PELT-12S	7TAA292240R0125	19
NVNZ-P366R/P	7TAA292150R0851	78	OVN2-10	7TAA292700R0043	105	PELT-12SL	7TAA292240R0126	19
NVNZ-P366S/P1	7TAA292150R0854	78	OVN2-12	7TAA292700R0044	105	PELT-17S	7TAA292240R0127	19
NVNZ-P366S/P2	7TAA292150R0855	78	OVN2-17	7TAA292700R0045	105	PELT-17SL	7TAA292240R0128	19
NVNZ-P366S/P3	7TAA292150R0856	78	OVN2-23	7TAA292700R0046	105	PELT-23S	7TAA292240R0131	19
NVNZ-P488R/P	7TAA292150R0859	78	OVN2-29	7TAA292700R0047	105	PELT-23SL	7TAA292240R0132	19
NVNZ-P488S/P1	7TAA292150R0862	78	OVN2-36	7TAA292700R0048	105	PELT-29S	7TAA292240R0133	19
NVNZ-P488S/P2	7TAA292150R0863	78	OVN2-48	7TAA292700R0049	105	PELT-29SL	7TAA292240R0134	19
NVWV-M120-10	7TAA292150R0864	69	PACOF-07B	7TAA292730R0000	32,134	PELT-36S	7TAA292240R0135	19
NVWV-M120-5	7TAA292150R0865	69	PACOF-10B	7TAA292730R0001	32,134	PELT-36SL	7TAA292240R0136	19

Index

Products in alphabetical order

Part. no.	GID no.	Page	Part. no.	GID no.	Page	Part. no.	GID no.	Page
PELT-48S	7TAA292240R0137	19	PLRG-36S	7TCA292000R6262	24	PSXG-48B	7TAA292430R0035	16
PELT-48SL	7TAA292240R0138	19	PLRG-48B	7TCA292000R6235	24	PSXT-10B	7TAA292430R0036	16
PHTG-17B	7TAA292430R0000	15	PLRG-48S	7TCA292000R6263	24	PSXT-12B	7TAA292430R0037	16
PHTG-23B	7TAA292430R0001	15	PLRT-07B	7TCA292000R6236	24	PSXT-17B	7TCA292000R0305	16
PHTG-29B	7TAA292430R0002	15	PLRT-07S	7TCA292000R6264	24	PUEG-56B	7TAA292360R0043	21,126
PHTG-36B	7TAA292430R0003	15	PLRT-10B	7TCA292000R6237	24	PUEG-70B	7TAA292360R0044	21,126
PHTG-48B	7TAA292430R0004	15	PLRT-10S	7TCA292000R6265	24	PUET-23B	7TAA292900R0004	21
PHTT-07B	7TAA292430R0005	15	PLRT-12B	7TCA292000R6238	24	PUET-29B	7TAA292900R0005	21
PHTT-10B	7TAA292430R0006	15	PLRT-12S	7TCA292000R6266	24	PUET-36B	7TAA292900R0006	21
PHTT-12B	7TAA292430R0007	15	PMACUT-38	7TAA292880R0006	121	PUET-48B	7TAA292900R0007	21
PHTT-17B	7TAA292430R0008	15	PMACUT-52	7TAA292880R0007	121	PUSG-17B	7TAA292490R0006	31
PHTT-23B	7TAA292430R0009	15	PMACUT-NW125	7TAA292880R0011	121	PUSG-17S	-	31
PIHG-125B	7TAA292360R0031	20,126	PMACUT-NW56	7TAA292880R0008	121	PUSG-23B	7TAA292490R0007	31
PIHG-125S	7TAA292360R0032	20,126	PMACUT-NW70	7TAA292880R0009	121	PUSG-23S	-	31
PIHG-56B	7TAA292360R0033	20,126	PMACUT-NW95	7TAA292880R0010	121	PUSG-29B	7TAA292490R0008	31
PIHG-56S	7TAA292360R0034	20,126	POHG-17B	7TAA292430R0017	15	PUSG-29S	-	31
PIHG-70B	7TAA292360R0036	20,126	POHG-17S	7TAA292430R0018	15	PUSG-36B	7TAA292490R0009	31
PIHG-70S	7TAA292360R0038	20,126	POHG-23B	7TAA292430R0019	15	PUSG-36S	-	31
PIHG-95B	7TAA292360R0040	20,126	POHG-23S	7TAA292430R0020	15	PUSG-48B	7TAA292490R0010	31
PIHG-95S	7TAA292360R0042	20,126	POHG-29B	7TAA292430R0021	15	PUSG-48S	-	31
PISG-17B	7TAA292240R0139	20	POHG-29S	7TAA292430R0022	15	PVDT-10P	7TAA292240R0178	22
PISG-17S	7TAA292240R0140	20	POHG-36B	7TAA292430R0023	15	PVDT-12P	7TAA292240R0179	22
PISG-23B	7TAA292240R0142	20	POHG-36S	7TAA292430R0024	15	PVDT-17P	7TAA292240R0180	22
PISG-23S	7TAA292240R0143	20	POHG-48B	7TAA292430R0025	15	PVDT-23P	7TAA292240R0181	22
PISG-29B	7TAA292240R0144	20	POHG-48S	7TAA292430R0026	15	PVDT-29P	7TCA292000R3817	22
PISG-29S	7TAA292240R0145	20	POHT-10B	7TAA292430R0027	15	RKS-07	7TAA292150R0907	119
PISG-36B	7TAA292240R0147	20	POHT-10S	7TAA292430R0028	15	RKS-10	7TAA292150R0908	119
PISG-36S	7TAA292240R0149	20	POHT-12B	7TAA292430R0029	15	RKS-12	7TAA292150R0909	119
PISG-48B	7TAA292240R0151	20	POHT-12S	7TAA292430R0030	15	RKS-17	7TAA292150R0910	119
PISG-48S	7TAA292240R0152	20	POSG-29B	7TCA292000R5823	21	RKS-23	7TAA292150R0911	119
PIST-07B	7TAA292240R0153	20	POSG-36B	7TCA292000R3749	21	RKS-29	7TAA292150R0912	119
PIST-07S	7TAA292240R0154	20	POSG-48B	7TCA292000R3750	21	RKS-36	7TAA292150R0913	119
PIST-10B	7TAA292240R0155	20	POSG-70B	7TAA292900R0008	21	RKS-48	7TAA292150R0914	119
PIST-10S	7TAA292240R0156	20	POSG-95B	7TCA292000R0304	21	RKS-56	7TAA292150R0915	119
PIST-12B	7TAA292240R0157	20	POST-10B	7TAA292240R0171	21	SCA-M16-10	7TAA292630R0000	123
PIST-12S	7TAA292240R0158	20	POST-12B	7TAA292240R0172	21	SCA-M20-10	7TAA292630R0001	123
PIST-17B	7TAA292240R0160	20	POST-17B	7TAA292240R0173	21	SCA-M25-11	7TAA292630R0002	123
PIST-17S	7TAA292240R0161	20	POST-23B	7TAA292240R0174	21	SCA-M32-13	7TAA292630R0003	123
PIST-23B	7TAA292240R0163	20	POST-29B	7TAA292240R0175	21	SCA-M40-13	7TAA292630R0004	123
PIST-23S	7TAA292240R0164	20	POST-36B	7TAA292240R0178	21	SCA-M50-14	7TAA292630R0005	123
PIST-29B	7TAA292240R0165	20	POST-48B	7TAA292240R0177	21	SCA-M63-14	7TAA292630R0006	123
PIST-29S	7TAA292240R0166	20	PPCOF-07B	7TAA292730R0012	33,134	SCA-P09	7TAA292630R0007	123
PIST-36B	7TAA292240R0167	20	PPCOF-10B	7TAA292730R0013	33,134	SCA-P11	7TAA292630R0008	123
PIST-36S	7TAA292240R0168	20	PPCOF-12B	7TAA292730R0014	33,134	SCA-P16	7TAA292630R0009	123
PIST-48B	7TAA292240R0169	20	PPCOF-17B	7TAA292730R0016	33,134	SCA-P21	7TAA292630R0010	123
PIST-48S	7TAA292240R0170	20	PPCOF-23B	7TAA292730R0018	33,134	SCA-P29	7TAA292630R0011	123
PLRG-17B	7TCA292000R6231	24	PPCOF-29B	7TAA292730R0020	33,134	SCA-P36	7TAA292630R0012	123
PLRG-17S	7TCA292000R6259	24	PPCOF-36B	7TAA292730R0021	33,134	SCA-P48	7TAA292630R0013	123
PLRG-23B	7TCA292000R6232	24	PPCOF-48B	7TAA292730R0022	33,134	SFH-07-0	7TAA292700R0050	115
PLRG-23S	7TCA292000R6260	24	PPCOF-70B	7TAA292730R0023	33,134	SFH-10-0	7TAA292700R0051	115
PLRG-29B	7TCA292000R6233	24	PSXG-23B	7TAA292430R0032	16	SFH-12-0	7TAA292700R0052	115
PLRG-29S	7TCA292000R6261	24	PSXG-29B	7TAA292430R0033	16	SFH-17-0	7TAA292700R0053	115
PLRG-36B	7TCA292000R6234	24	PSXG-36B	7TAA292430R0034	16	SFH-23-0	7TAA292700R0054	115

Index

Products in alphabetical order

Part. no.	GID no.	Page	Part. no.	GID no.	Page	Part. no.	GID no.	Page
SFH-29-0	7TAA292700R0055	115	SLAD-M257	7TAA292000R0104	143	SLWD-M406	7TAA292000R0157	144
SFH-36-0	7TAA292700R0056	115	SLAD-M323	7TAA292000R0105	143	SLWD-M409	7TAA292000R0158	144
SFH-48-0	7TAA292700R0057	115	SLAD-M329	7TAA292000R0106	143	SLWD-M506	7TAA292000R0159	144
SFHS-00	7TAA292700R0058	115	SLAD-M406	7TAA292000R0107	143	SLWD-M508	7TAA292000R0160	144
SFHS-PH	7TAA292700R0060	115	SLAD-M409	7TAA292000R0108	143	SLWD-M638	7TAA292000R0161	144
SFHS-PH1	7TAA292700R0061	115	SLAD-M506	7TAA292000R0109	143	SLWD-P070	7TAA292000R0162	145
SGB-07	7TAA292720R0027	117	SLAD-M508	7TAA292000R0110	143	SLWD-P090	7TAA292000R0163	145
SGB-09	7TAA292720R0029	117	SLAD-M638	7TAA292000R0111	143	SLWD-P092	7TAA292000R0164	145
SGB-11	7TAA292720R0031	117	SLAD-P090	7TAA292000R0112	145	SLWD-P110	7TAA292000R0165	145
SGB-16	7TAA292720R0036	117	SLAD-P112	7TAA292000R0113	145	SLWD-P112	7TAA292000R0166	145
SGB-21	7TAA292720R0039	117	SLAD-P132	7TAA292000R0114	145	SLWD-P130	7TAA292000R0167	145
SGB-29	7TAA292720R0043	117	SLAD-P137	7TAA292000R0115	145	SLWD-P132	7TAA292000R0168	145
SGB-36	7TAA292720R0044	117	SLAD-P167	7TAA292000R0116	145	SLWD-P137	7TCA292000R4141	145
SGB-48	7TAA292720R0046	117	SLAD-P213	7TAA292000R0117	145	SLWD-P167	7TAA292000R0169	145
SGG-125	7TAA292860R0033	127	SLAD-P299	7TAA292000R0118	145	SLWD-P213	7TAA292000R0170	145
SGG-56	7TAA292860R0034	127	SLAD-P366	7TAA292000R0119	145	SLWD-P299	7TAA292000R0171	145
SGG-70	7TAA292860R0035	127	SLAD-P488	7TAA292000R0120	145	SLWD-P366	7TAA292000R0172	145
SGG-95	7TAA292860R0036	127	SLND-M120	7TAA292000R0121	143	SLWD-P488	7TAA292000R0173	145
SGG-M6356	7TCA292000R4106	129	SLND-M160	7TAA292000R0122	143	SRER-06	7TAA292920R0008	148
SGG-P3656	7TCA292000R4107	129	SLND-M162	7TAA292000R0123	143	SRER-16	7TAA292920R0009	148
SGH-23	7TAA292720R0047	116	SLND-M200	7TAA292000R0124	143	SRER-21	7TAA292920R0010	148
SGH-29	7TAA292720R0048	116	SLND-M202	7TAA292000R0125	143	SRER-29	7TAA292920R0011	148
SGH-36	7TAA292720R0049	116	SLND-M207	7TAA292000R0126	143	SRER-50	7TAA292920R0012	148
SGH-48	7TAA292720R0050	116	SLND-M253	7TAA292000R0127	143	SREV-40	7TAA292920R0013	148
SGH-56	7TAA292720R0051	116,130	SLND-M257	7TAA292000R0128	143	SVN4-07	7TAA292640R0000	104
SGH-70	7TAA292720R0052	116,130	SLND-M323	7TAA292000R0129	143	SVN4-09	7TAA292640R0001	104
SGH-95	7TAA292720R0053	116,130	SLND-M329	7TAA292000R0130	143	SVN4-11	7TAA292640R0002	104
SGI-M7556	7TCA292000R4118	116	SLND-M406	7TAA292000R0131	143	SVN4-13	7TAA292640R0003	104
SGL-07	7TAA292720R0054	116	SLND-M409	7TAA292000R0132	143	SVN4-16	7TAA292640R0004	104
SGL-10	7TAA292720R0055	116	SLND-M506	7TAA292000R0133	143	SVN4-21	7TAA292640R0005	104
SGL-12	7TAA292720R0056	116	SLND-M508	7TAA292000R0134	143	SVN4-29	7TAA292640R0006	104
SGL-17	7TAA292720R0057	116	SLND-M638	7TAA292000R0135	143	SVN4-36	7TAA292640R0007	104
SGL-23	7TAA292720R0058	116	SLND-P070	7TAA292000R0136	144	SVN4-42	7TAA292640R0008	104
SGL-29	7TAA292720R0059	116	SLND-P090	7TAA292000R0137	144	SVN4-48	7TAA292640R0009	104
SGO3-125	7TAA292980R0000	131	SLND-P092	7TAA292000R0138	144	SVN4-G00	7TAA292640R0010	104
SGO3-56	7TAA292980R0001	131	SLND-P110	7TAA292000R0139	144	SVN4-G01	7TAA292640R0011	104
SGO3-70	7TAA292980R0002	131	SLND-P112	7TAA292000R0140	144	SVN4-G02	7TAA292640R0012	104
SGO3-95	7TAA292980R0003	131	SLND-P132	7TAA292000R0141	144	SVN4-G04	7TAA292640R0013	104
SGO-56	7TAA292860R0037	127	SLND-P137	7TAA292000R0142	144	SVN4-G06	7TAA292640R0014	104
SGO-70	7TAA292860R0038	127	SLND-P167	7TAA292000R0143	144	SVN4-G07	7TAA292640R0015	104
SGO-95	7TAA292860R0039	127	SLND-P213	7TAA292000R0144	144	SVN4-G08	7TAA292640R0016	104
SGS-125	7TAA292720R0060	117,130	SLND-P299	7TAA292000R0145	144	SVN4-G09	7TAA292640R0017	104
SGS-36	7TAA292720R0061	117,130	SLND-P366	7TAA292000R0150	144	SVN4-M12	7TAA292640R0018	104
SGS-48	7TAA292720R0062	117,130	SLND-P488	7TAA292000R0147	144	SVN4-M12/02	7TAA292640R0019	104
SGS-56	7TAA292720R0063	117,130	SLWD-M120	7TAA292000R0148	144	SVN4-M16	7TAA292640R0020	104
SGS-70	7TAA292720R0064	117,130	SLWD-M160	7TAA292000R0149	144	SVN4-M16/02	7TAA292640R0021	104
SGS-95	7TAA292720R0065	117,130	SLWD-M162	7TAA292000R0150	144	SVN4-M20	7TAA292640R0022	104
SLAD-M120	7TAA292000R0098	143	SLWD-M202	7TAA292000R0151	144	SVN4-M20/02	7TAA292640R0023	104
SLAD-M160	7TAA292000R0099	143	SLWD-M207	7TAA292000R0152	144	SVN4-M25	7TAA292640R0024	104
SLAD-M162	7TAA292000R0100	143	SLWD-M253	7TAA292000R0153	144	SVN4-M25/01	7TCA292000R4288	104
SLAD-M202	7TAA292000R0101	143	SLWD-M257	7TAA292000R0154	144	SVN4-M25/02	7TAA292640R0025	104
SLAD-M207	7TAA292000R0102	143	SLWD-M323	7TAA292000R0155	144	SVN4-M32	7TAA292640R0026	104
SLAD-M253	7TAA292000R0103	143	SLWD-M329	7TAA292000R0156	144	SVN4-M32/02	7TAA292640R0027	104

Index

Products in alphabetical order

Part. no.	GID no.	Page	Part. no.	GID no.	Page	Part. no.	GID no.	Page
SVN4-M40	7TAA292640R0028	104	VAMT-10B	7TAA292240R0223	22	WPS-NW12	7TAA292650R0001	105
SVN4-M40/01	7TCA292000R4289	104	VAMT-10S	7TAA292240R0224	22	WPS-NW17	7TAA292650R0002	105
SVN4-M40/02	7TAA292640R0029	104	VAMT-12B	7TAA292240R0225	22	WPS-NW23	7TAA292650R0003	105
SVN4-M50	7TAA292640R0030	104	VAMT-12S	7TAA292240R0226	22	WPS-NW29	7TAA292650R0004	105
SVN4-M50/01	7TCA292000R4290	104	VCSG-17B	7TAA292240R0230	23	WPS-NW36	7TAA292650R0005	105
SVN4-M50/02	7TAA292640R0031	104	VCSG-17S	7TAA292240R0231	23	WPS-NW48	7TAA292650R0006	105
SVN4-M63	7TAA292640R0032	104	VCSG-23B	7TAA292240R0232	23	XPCLG-17BB	7TAA292240R0290	25
SWA-M16-10	7TAA292590R0000	123	VCSG-23S	7TAA292240R0233	23	XPCLG-17SB	7TAA292240R0291	25
SWA-M20-10	7TAA292590R0001	123	VCSG-29B	7TAA292240R0234	23	XPCLG-23BB	7TAA292240R0292	25
SWA-M25-11	7TAA292590R0002	123	VCSG-29S	7TAA292240R0235	23	XPCLG-23SB	7TAA292240R0293	25
SWA-M32-13	7TAA292590R0003	123	VCSG-36B	7TAA292240R0236	23	XPCLG-29BB	7TAA292240R0294	25
SWA-M40-13	7TAA292590R0004	123	VCSG-36S	7TAA292240R0237	23	XPCLG-29SB	7TAA292240R0295	25
SWA-M50-14	7TAA292590R0005	123	VCSG-48B	7TAA292240R0238	23	XPCLG-36BB	7TAA292240R0296	25
SWA-M63-14	7TAA292590R0006	123	VCSG-48S	7TAA292240R0239	23	XPCLG-36SB	7TAA292240R0297	25
SWA-P09	7TAA292590R0007	123	VCSG-56B	7TAA292360R0054	23,126	XPCLG-48BB	7TAA292240R0298	25
SWA-P11	7TAA292590R0008	123	VCSG-56S	7TAA292360R0055	23,126	XPCLG-48SB	7TAA292240R0299	25
SWA-P16	7TAA292590R0009	123	VCSG-70B	7TAA292360R0056	23,126	XPCLT-10BB	7TCA292000R0334	25
SWA-P21	7TAA292590R0010	123	VCSG-70S	7TAA292360R0057	23,126	XPCLT-10SB	7TCA292000R9338	25
SWA-P29	7TAA292590R0011	123	VCSG-95B	7TAA292360R0058	23,126	XPCLT-12BB	7TAA292240R0300	25
SWA-P36	7TAA292590R0012	123	VCSG-95S	7TAA292360R0059	23,126	XPCLT-12SB	7TAA292240R0301	25
SWA-P48	7TAA292590R0013	123	VCST-07B	7TAA292240R0240	23	XPCLT-17BB	7TAA292240R0302	25
VAMG-17B	7TAA292240R0195	22	VCST-07S	7TAA292240R0241	23	XPCLT-17SB	-	25
VAMG-17S	7TAA292240R0196	22	VCST-10B	7TAA292240R0242	23	XPCSG-17BO	7TCA292000R8726	28
VAMG-23B	7TAA292240R0197	22	VCST-10S	7TAA292240R0243	23	XPCSG-23BO	7TCA292000R8802	28
VAMG-23S	7TAA292240R0198	22	VCST-12B	7TAA292240R0244	23	XPCSG-29BO	7TCA292000R8803	28
VAMG-29B	7TAA292240R0199	22	VCST-12S	7TAA292240R0245	23	XPCSG-36BO	7TCA292000R8804	28
VAMG-29S	7TAA292240R0200	22	VCST-17B	7TAA292240R0246	23	XPCSG-48BO	7TCA292000R8805	28
VAMG-36B	7TAA292240R0201	22	VCST-17S	7TAA292240R0247	23	XPCSG-07BO	7TCA292000R9467	28
VAMG-36S	7TAA292240R0202	22	VOHD-07B	7TAA292240R0248	24	XPCSG-10BO	7TCA292000R8799	28
VAMG-48B	7TAA292240R0203	22	VOHD-07S	7TAA292240R0249	24	XPCSG-12BO	7TCA292000R8801	28
VAMG-48S	7TAA292240R0204	22	VOHD-10B	7TAA292240R0250	24	XPCSG-17BG	7TCA292000R8829	27
VAMLG-125B	7TAA292360R0046	23	VOHD-10S	7TAA292240R0251	24	XPCSG-23BG	7TCA292000R8831	27
VAMLG-125S	7TAA292360R0047	23	VOHD-12B	7TAA292240R0252	24	XPCSG-29BG	7TCA292000R8832	27
VAMLG-17B	7TAA292240R0205	23	VOHD-12S	7TAA292240R0253	24	XPCSG-36BG	7TCA292000R8834	27
VAMLG-17S	7TAA292240R0206	23	VOHG-125B	7TAA292360R0060	24,126	XPCSG-48BG	7TCA292000R8835	27
VAMLG-23B	7TAA292240R0207	23	VOHG-125S	7TAA292360R0061	24,126	XPCSG-56BG	-	27
VAMLG-23S	7TAA292240R0208	23	VOHG-17B	7TAA292240R0255	24	XPCSG-70BG	-	27
VAMLG-29B	7TAA292240R0209	23	VOHG-17S	7TAA292240R0257	24	XPST-07BG	-	27
VAMLG-29S	7TAA292240R0210	23	VOHG-23B	7TAA292240R0259	24	XPST-10BG	7TCA292000R8827	27
VAMLG-36B	7TAA292240R0211	23	VOHG-23S	7TAA292240R0261	24	XPST-12BG	7TCA292000R8828	27
VAMLG-36S	7TAA292240R0212	23	VOHG-29B	7TAA292240R0263	24	XSOLG-17BG	7TAA292240R0303	25
VAMLG-48B	7TAA292240R0213	23	VOHG-29S	7TAA292240R0265	24	XSOLG-23BG	7TAA292240R0304	25
VAMLG-48S	7TAA292240R0214	23	VOHG-36B	7TAA292240R0266	24	XSOLG-29BG	7TAA292240R0305	25
VAMLG-56B	7TAA292360R0048	23	VOHG-36S	7TAA292240R0267	24	XSOLG-36BG	7TAA292240R0306	25
VAMLG-56S	7TAA292360R0049	23	VOHG-48B	7TAA292240R0269	24	XSOLG-48BG	7TAA292240R0307	25
VAMLG-70B	7TAA292360R0050	23	VOHG-48S	7TAA292240R0271	24	XSOLT-10BG	7TCA292000R0335	25
VAMLG-70S	7TAA292360R0051	23	VOHG-56B	7TAA292360R0062	24,126	XSOLT-12BG	7TAA292240R0314	25
VAMLG-95B	7TAA292360R0052	23	VOHG-56S	7TAA292360R0063	24,126	XTPCG-17BB.50	7TCA292000R9985	28
VAMLG-95S	7TAA292360R0053	23	VOHG-70B	7TAA292360R0064	24,126	XTPCG-23BB.50	7TCA292000R9987	28
VAMLT-10B	7TAA292240R0217	23	VOHG-70S	7TAA292360R0065	24,126	XTPCG-29BB.50	7TCA292000R9988	28
VAMLT-10S	7TAA292240R0218	23	VOHG-95B	7TAA292360R0066	24,126	XTPCG-36BB.50	7TCA292000R9989	28
VAMLT-12B	7TAA292240R0219	23	VOHG-95S	7TAA292360R0067	24,126	XTPCG-48BB.50	7TCA292000R9990	28
VAMLT-12S	7TAA292240R0220	23	WPS-NW10	7TAA292650R0000	105	XTPCG-56BB.50	7TCA292000R9991	28

Index

Products in alphabetical order

Part. no.	GID no.	Page	Part. no.	GID no.	Page
XTPCG-70BB.50	7TCA292000R9992	28	XVCSFT-07BB	-	27
XVCS1H-10BG	7TCA292000R5547	26	XVCSFT-10BB	7TCA292000R9746	27
XVCS1H-12BG	7TAA292240R0315	26	XVCSFT-12BB	7TCA292000R9747	27
XVCS1H-17BG	7TAA292240R0316	26	xxxG-17x/S	-	36
XVCS1H-23BG	7TAA292240R0317	26	xxxG-23x/S	-	36
XVCS1H-29BG	7TAA292240R0318	26	xxxG-29x/S	-	36
XVCS1H-36BG	7TAA292240R0319	26	xxxG-36x/S	-	36
XVCS1H-48BG	7TAA292240R0320	26	xxxG-48x/S	-	36
XVCS2H-10BG	-	26	xxxT-12x/S	-	36
XVCS2H-12BG	7TCA292000R4679	26	xxxT-17x/S	-	36
XVCS2H-17BG	7TCA292000R4681	26			
XVCS2H-23BG	7TCA292000R4682	26			
XVCS2H-29BG	7TCA292000R4683	26			
XVCS2H-36BG	7TCA292000R4684	26			
XVCS2H-48BG	7TCA292000R4685	26			
XVCSFG-17BB	7TCA292000R9748	27			
XVCSFG-23BB	7TCA292000R9750	27			
XVCSFG-29BB	7TCA292000R9751	27			
XVCSFG-36BB	7TCA292000R9752	27			
XVCSFG-48BB	7TCA292000R9753	27			

Important information

The specifications and instructions for our customers in this document reflect the product engineering level at the time of manufacturing. PMA accepts no liability for damages resulting from unprofessional installation or application or misuse for a purpose. This disclaimer also includes damages to third parties. It is the customer's responsibility to check the delivered products and immediately notify PMA of detected faults. It is also the customer's responsibility to test the delivered product on its applicability for the intended purpose. PMA will accept no liability or responsibility for their products if a product or a PMA system is combined or used together with third-party products, i.e. products from other companies than PMA.

Jurisdiction in all legal disputes concerning product liability have the courts of the canton of Zurich/Switzerland. Swiss law applies.

To guarantee punctual deliveries please check availability of products before ordering.

The text, pictures, drawings and application photos which are published in this document may not, in part, or totally, be copied or used by any third party in any form or way. Especially the downloading of text, pictures, drawings, and application photos onto Online Services is strictly forbidden, irrespective of if they are edited for this purpose or not. At all times PMA reserves the right to take all legal steps necessary.



For more information go to:
www.pma.ch

Further information

Visit our website

Visit the PMA product web pages on pma.ch for our most up-to-date product lineup, and much more. This is the place to go to find all of the planning documents you need at your fingertips, including:

- Technical data sheets
- General technical details
- CAD files
- Brochures
- Videos

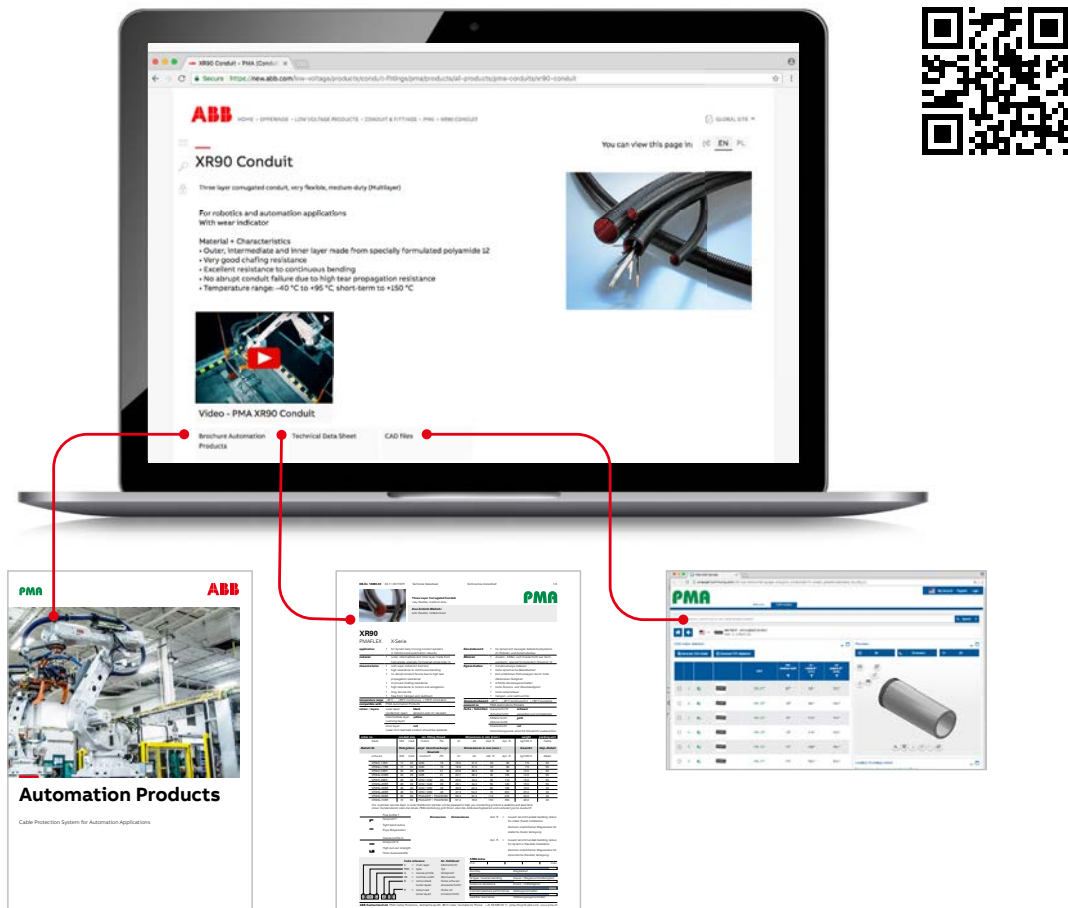

Additional information

We reserve the right to make technical changes or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail. ABB AG does not accept any responsibility whatsoever for potential errors or possible lack of information in this document.

We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction, disclosure to third parties or utilization of its contents – in whole or in parts – is forbidden without prior written consent of ABB AG.

ABB Switzerland Ltd.

PMA Cable Protection

Aathalstrasse 90

CH-8610 Uster

Phone +41 58 585 00 11

pma-info@ch.abb.com

www.pma.ch

