

## FASTER. SAFER. EASIER.



Save time and money with every punch.





# Save time and money with every punch!

From the leaders in knockout technology comes the new SPEED PUNCH<sup>TM</sup> System. The patent pending "no-thread" design eliminates cross-threading, while the innovative SPEED LOCK mechanism quickly secures the punch in place. This means longer tool life and faster punches, saving you time and money on the job. SPEED PUNCH<sup>TM</sup> is available in ISO 16 to ISO 63 and PG 16 metric sizes and two kit configurations.






SPEED LOCK mechanism quickly secures the entire system in place: Punch more holes in less time.



"No-thread" punch design quickly and easily slides on/off draw stud: The fastest punch system on the market today.





LS50-L FLEX

In combination with the hydraulic punching tool LS50-L Flex it represents the state of the art in performance and speed.




Matched die heights eliminate need for additional spacers:

Fewer extra parts to lose on the job site.

#### Standard draw stud end:

Works with your existing hydraulic and battery-operated punch drivers.



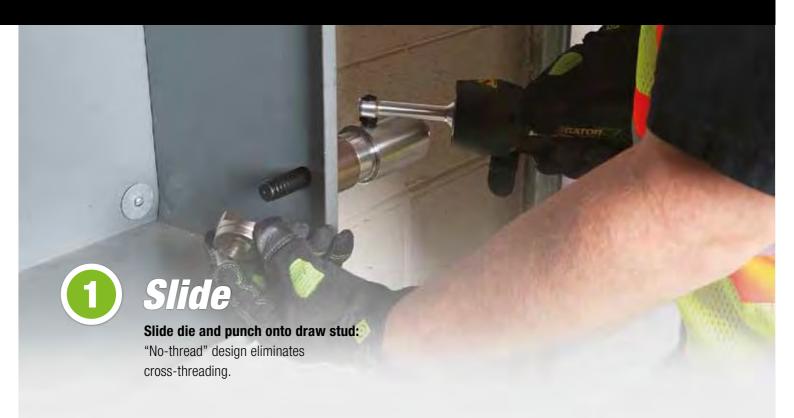



**Secure SPEED LOCK onto draw stud:** 

Faster setup and disassembly.



Punch hole:

Save time and money with every punch!

#### Highlights

- Simple operation and great time-saving due to speed lock system
- Suitable for mild steel (St37), plastic and aluminum up to 3,5 mm thick
- Use with the LS50-L FLEX battery-operation driver for the ultimate in speed and performance





### **Ordering Information**



SAVE TIME AND MONEY WITH EVERY PUNCH.

Scan to watch the video www.youtube.com/greenleedemo





Part No.	Description	Qty
52055439SET	SPEED PUNCH™ set ISO 16 - 40	1
52055440SET	SPEED PUNCH™ set ISO 16 - 63	1
52055431	Punch & Die ISO 16 (16,2 mm)	1
52055432	Punch & Die ISO 20 (20,4 mm)	1
52055433	Punch & Die PG 16 (22,5 mm)	1
52055434	Punch & Die ISO 25 (25,4 mm)	1
52055435	Punch & Die ISO 32 (32,5 mm)	1
52055436	Punch & Die ISO 40 (40,5 mm)	1
52055437	Punch & Die ISO 50 (50,8 mm)	1
52055438	Punch & Die ISO 63 (64,0 mm)	1
52055439	SPEED LOCK & Draw stud 9,5 mm for ISO 16/20/25 and PG 16	1
52055440	SPEED LOCK & Draw stud 19 mm for ISO 32/40/50/63	1

#### Strong brands for your success:





#### **Gustav Klauke GmbH**

Auf dem Knapp 46 D-42855 Remscheid

Phone: +49(0) 2191/907-0 +49(0) 2191/907-205

E-Mail: info@klauke.textron.com

Internet: www.klauke.com