

Klauke



**THE
REVOLUTIONARY
MICRO STRIP TOOL**



CUT



STRIP



CRIMP

THE MULTITALENTED KLAUKE MICRO

One tool for a wide range of applications

ONE TOOL – MANY APPLICATIONS

Klauke

Cutting of various
materials



Stripping

NEW



Crimping tools for
cable end-sleeves



Crimping tools for
cable lugs



Crimping tools for
solderless terminals



Crimping tools for
photovoltaic and
compatible connectors

NEW



THE NEW KLAUKE
STRIPPING DIES

REVOLUTIONARY
IN THE MARKET



MICRO-STRIP


FASTER AND SAFER STRIPPING:
USING THE STRIPPING DIES!

The **Klauke micro** also is a true all-rounder when it comes to stripping.
Using the stripping dies there is now, for the first time, an electromechanical tool available on the market for stripping conductors from 6 to 35 mm² cross-section.

The advantages are obvious:
Compared to manual stripping with pliers, the **Klauke micro-strip** is much faster.
Compared to stripping using a knife, it is also much safer to work with.

Until now, users could only strip cables in the range up to 16 mm² by applying physical force – either with manual wire stripping tools or with a knife.

Stripping dies for the Klauke micro					
Cable diameter in mm ²	6	10	16	25	35
Article number	SD5006	SD5010	SD5016	SD5025	SD5035
Max. outer cable Ø OD in mm			Ø11.5		
Displacement DP in mm (fixed)			12		
Stripping length SL in mm (adjustable stop)			3 to 28		



Electromechanically effective:
perfect results with only 20 % effort*

The drawback of manual stripping are well known: repeated use of the muscles in the forearm can lead to fatigue and overloading.

Stripping more than a hundred conductors in one day?
No problem with the micro!
Using the stripping dies, the Klauke micro becomes a tool that achieves consistently clean results - with considerably less force and significantly less strain on the joints.

*Compared to a hand tool.



STRIPPING

Stripping simply and safely - No conductor damage



EKSD50ML

Electromechanical wire stripping tool

6 - 35 mm²



EKSD50ML

SCOPE OF SUPPLY

Art. no.	Description
SD5010	Stripping die for 10 mm² conductor
SD5016	Stripping die for 16 mm² conductor
SD5025	Stripping die for 25 mm² conductor
SD5035	Stripping die for 35 mm² conductor
SD50CS	Cable stop
KKEK50ML	Plastic carry case
KTG-H1	Tool grease
LGML1	Charger for 10.8 V Li-Ion rechargeable batteries, 230 V
RAML1225	Rechargeable battery 10.8 V / 2.5 Ah, Li-Ion (27 Wh)

SD5006, SD5010, SD5016, SD5025, SD5035

Stripping-crimping dies



SD5010
For 10 mm² conductor



SD5016
For 16 mm² conductor



SD5025
For 25 mm² conductor



SD5035
For 35 mm² conductor



SD50CS
Cable stop



SD5006
For 6 mm² conductor
(optionally available, not
supplied as standard)

Open for lots: the Klauke micro-strip creates a wide strip width

It might be impossible using wire strippers but it's no problem for the Klauke micro-strip: large cross-sections up to 35 mm² can also be stripped as well as thick insulation (NSGAFÖU), double-insulated cable types plus harder and tougher insulation.

In many applications - for example in switch cabinet construction - stripping and cutting of cables are often completed simultaneously. By use of the integrated cutting die inside the stripping die, conductors of all classes can be cut, regardless of whether they are solid, stranded or fine-stranded.



Quick change from left to right-handed variant



Left-handed variant



Right-handed variant

Does your work team include left-handed and right-handed people?

Then no need to worry, with the Klauke micro-strip it's no problem.

The die can be used by both left- and righthanded people by changing the installation direction accordingly.

Details on the stripping function

The cutting cones are guided and connected by pins (screws) and pretensioned into the initial position by compression springs.

- When the tool is operated, the die bodies approach each other and the cutting cones cut into the cable.
- Further activation of the tool causes the cones to move axially and strip off the jacket.

The stripping length can be adjusted using the stop sleeve, thus ensuring consistent quality.



CRIMPING – CABLE END-SLEEVES

Perfect crimping results using crimping dies for cable end-sleeves



EKWF50ML

CRIMPING – INSULATED CONNECTORS

Highly versatile



EK50ML

Electromechanical crimping tool

0.5 - 50 mm²



EKWF50ML

AE5071, AE5072, AE5073, ZAE5072
Including cable end-sleeves crimping dies



AE5071
for cable end-sleeves
0.5 - 6 mm²



AE5072
for cable end-sleeves
10 - 25 mm²



AE5073
for cable end-sleeves
35 - 50 mm²



ZAE5072
for twin cable
end-sleeves
2×6 - 2×16 mm²

SCOPE OF SUPPLY	
Art. no.	Description
AE5071	Crimping die for cable end-sleeves, 0.5 - 6 mm²
AE5072	Crimping die for cable end-sleeves, 10 - 25 mm²
AE5073	Crimping die for cable end-sleeves, 35 - 50 mm²
ZAE5072	Crimping die for twin cable end-sleeves, 2×6 – 2×16 mm²
KKEK50ML	Plastic case
LGML1	Charger for 10.8 V Li-Ion rechargeable batteries, 230 V
RAML1225	Rechargeable battery 10.8 V / 2.5 Ah, Li-Ion (27 Wh)

Electromechanical crimping tool

0.1 - 50 mm²



EK50ML

IS5071
Crimping die included



IS5071
For insulated Connector
0.5 - 6 mm²

SCOPE OF SUPPLY	
Art. no.	Description
IS5071	Crimping die for insulated connectors 0.5 - 6 mm²
KKEK50ML	Plastic case
LGML1	Charger for 10.8 V Li-Ion rechargeable batteries, 230 V
RAML1225	Rechargeable battery 10.8 V / 2.5 Ah, Li-Ion (27 Wh)

CRIMPING - photovoltaic connectors
and compatible connectors



EKPV50ML

CUTTING
One die - countless possibilities



EC50ML

Electromechanical crimping tool

2,5 - 6 mm²



EKPV50ML

SCOPE OF SUPPLY

Art. no.	Description
PV502	Crimping die
KKEK50ML	Plastic case
LGML1	Charger for 10.8 V Li-Ion rechargeable batteries, 230 V
RAML1225	Rechargeable battery 10.8 V / 2.5 Ah, Li-Ion (27 Wh)

PV502
Crimping die inclusive



PV502
Crimping die

Electromechanical cutting tool

Multi-Stranded to 25 mm², Steel to Ø 3mm



EC50ML

SCOPE OF SUPPLY

Art. no.	Description
S502	Cutting dies
KKEK50ML	Plastic case
LGML1	Charger for 10.8 V Li-Ion rechargeable batteries, 230 V
RAML1225	Rechargeable battery 10.8 V / 2.5 Ah, Li-Ion (27 Wh)

S502
cutting die inclusive



S502
Cutting dies

THE REVOLUTIONARY POWERSENSE FUNCTION



What makes the Klauke micro so unique is its innovative operating concept with PowerSense function. Workpiece pre-clamping is done by hand – with the familiar precision and speed of mechanical crimping pliers. The stripping, cutting or crimping operation is performed automatically using the force of the integrated motor.



Best crimping results



Ready whenever you need it



Manual pre-clamping



Motorized stripping / crimping / cutting

GOES EASY ON THE NERVES – IN THE TRUEST SENSE OF THE WORD



Frequent manual crimping:

leads, in the long term, to repetitive strain injuries in the wrist and forearm.




Motorized crimping with innovative PowerSense function:

ensures maximum efficiency with low strain and minimum health risk.

The enormous easing of the burden on nerves and muscles thanks to the PowerSense function is particularly worthwhile when you consider the costs that can arise from lost working time of employees, for example due to carpal tunnel syndrome.

- Fewer symptoms of stress overloading
- Less lost working time and fewer delays in schedule
- Greater planning security for everyone

OUR VERSATILE DIES AT A GLANCE

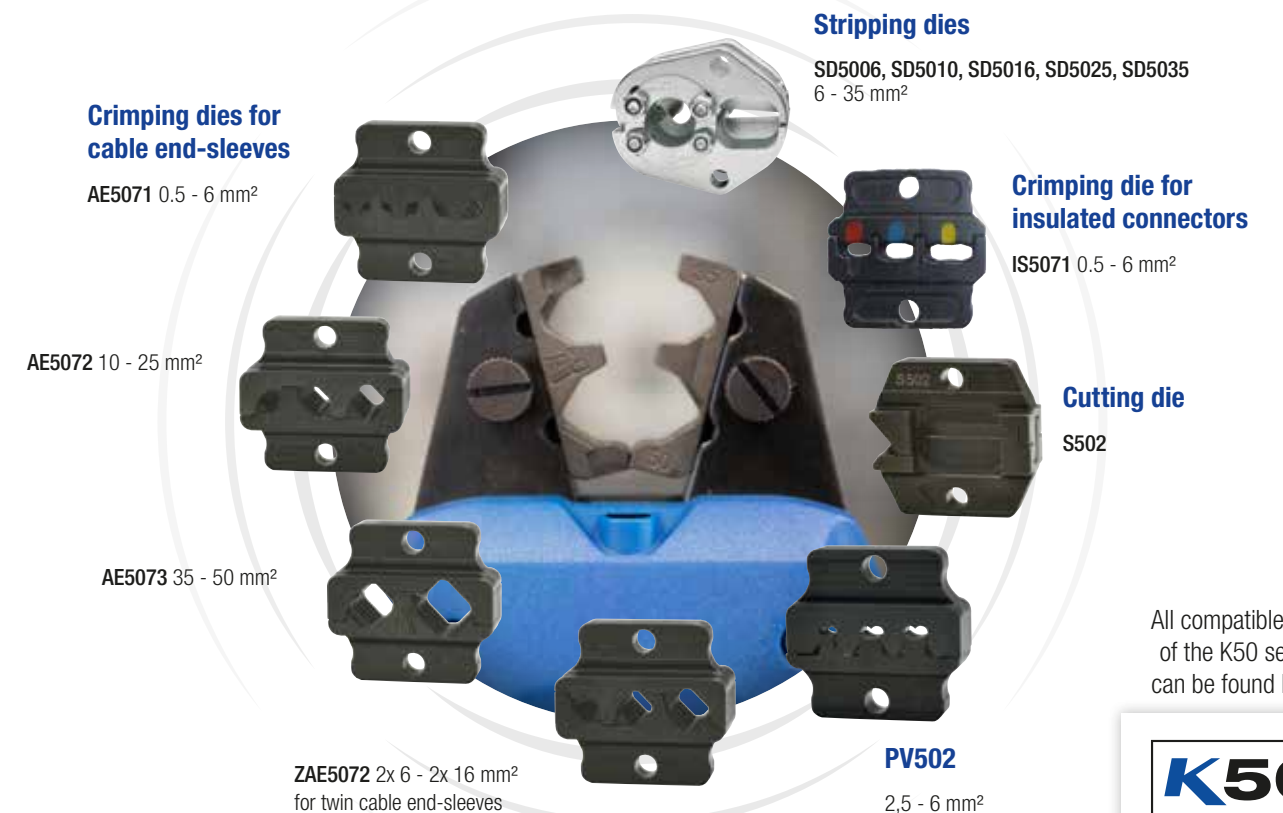

All compatible dies of the K50 series can be found here:

K50
SERIE



INNOVATIVE TECHNOLOGY - OPTIMUM RESULTS

Thanks to its lightweight design and size, the tools of the Klauke ML family are the ideal tools when working in confined spaces, thereby speeding up and simplifying the work to be done. Equipped with a 2.5 Ah rechargeable battery, one charge easily suffices to get the job done for an entire working day. The Klauke micro is the perfect supplement to the Klauke ML family portfolio.



EKWF120ML



EK30IDML



EK50ML



ES32ML



EK354ML

MICRO COMPACT
AND HANDY

Ultra-light
and ergonomic
so that operators' most
valuable assets – „their
hands“ – stay healthy always

Illuminating
thanks to its LED lamp for
illuminating the crimping location
and the working area

Innovative
thanks to single-lever operation
for controlling all tool functions

Versatile
for convenient stripping,
crimping and cutting

Balanced
and drop-safe
thanks to the tool fixing point
for use with balancer or to
ensure drop protection when
used in field work

Smart and rugged
with multifunction LED for
maintenance display and
data transmission as well as
powerful Li-Ion rechargeable
battery with state-of-charge
indicator

TECHNICAL DATA EK 50 ML

Battery voltage	10.8 V
Battery capacity	2.5 Ah, Li-Ion
Battery charging time	ca. 45 min.
Weight with Battery	0.96 kg
Ambient temperature	-10 °C to +40 °C

L-BOXX WITH ELECTROMECHANICAL CRIMPING TOOL
EK 50 ML AND EXTENSIVE ADDITIONAL EQUIPMENT

LBOXXEK50ML		
SCOPE OF SUPPLY		
Art. no.	Description	Quantity
3R8	Tubular cable lug without inspection hole, 16 mm², M8, Cu tin-plated	25
47612	Insulated Cable end-sleeves, 10 mm², 22 mm	50
47712	Insulated Cable end-sleeves, 16 mm², 24 mm	50
47818	Insulated Cable end-sleeves DIN 46228 Part 4, 25 mm²	25
47918	Insulated Cable end-sleeves DIN 46228 Part 4, 35 mm²	25
48025	Insulated Cable end-sleeves DIN 46228 Part 4, 50 mm², 40 mm length	20
4R8	Tubular cable lug without inspection hole, 25 mm², M8, Cu tin-plated	25
652C6	Insulated Solderless terminal M6, 10 mm², fork type	50
AE5072	Crimping dies for cable end-sleeves, 10 - 25 mm²	1
AE5073	Crimping dies for cable end-sleeves, 35 - 50 mm²	1
EK50ML	Electromechanical crimping tool 0.14 - 50 mm²	1
IS5072	Crimping dies IS 50, simple crimping, 10 - 16 mm²	1
K118	Manual cutting tool for Al- and Cu cables up to Ø 12 mm	1
LBOXX136LFG	L-BOXX with front handle (B/T/H: 442 x 357 x 151 mm)	1
LGML1	Charger for 10.8 V Li-Ion rechargeable batteries, 230 V	1
R505	Crimping dies R 50, 16 - 25 mm²	1
RAML1225	Rechargeable battery 10.8 V / 2.5 Ah, Li-Ion (27 Wh)	1





RIDGID

GREENLEE

Klauke

To receive up-to-date information on our products, services and promotional campaigns, register for our Newsletter here:

[KLAUKE.COM/NEWSLETTER](https://klauke.com/newsletter)



Follow us!



© 2024 Gustav Klauke GmbH. All rights reserved. The Klauke logo and the Emerson logo are registered trademarks of Emerson Electric Co. or its subsidiaries in the USA and other countries. All other marks belong to their respective owners. Subject to change without notification. BREK50MLGB 07/24 III

Klauke

Gustav Klauke GmbH
Auf dem Knapp 46
D-42855 Remscheid

Tel.: +49 (0) 2191 / 907 - 0
Klauke-Info@Emerson.com
[Klauke.com](https://klauke.com)

EMERSON